




GEOMETRY GLOSSARY /

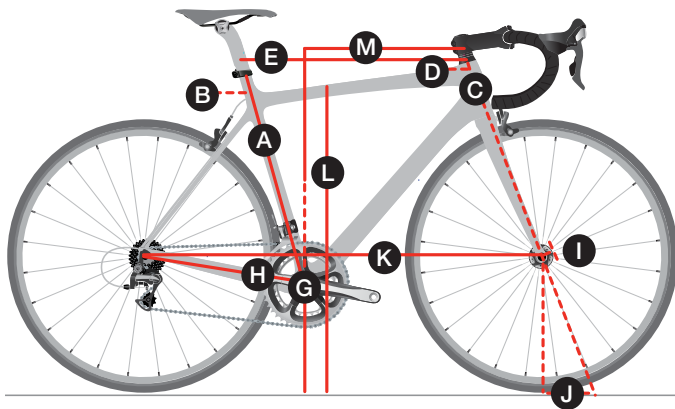

ROAD /

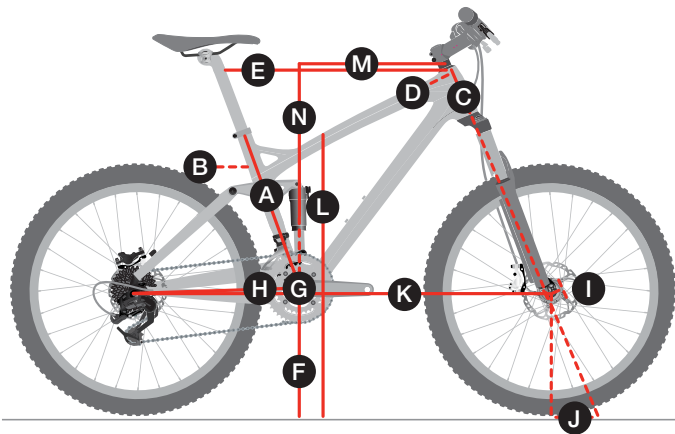

MOUNTAIN /

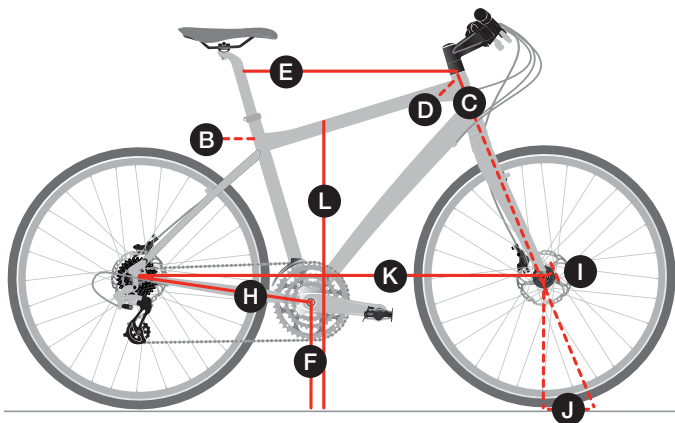


TOWN /

A Seat tube	The distance from the center of the bottom bracket to the top of the seat tube.
B Seat tube angle	The angle of seat tube to the ground. Tailored to optimize power transmission on each frame size.
C Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.
D Head angle	The angle of head tube to the ground. Tailored to optimize steering precision on each frame size.
E Effective top tube	The horizontal measure from the center of the headset to the center of the seatpost. The most important measurement when buying a bike, because it cannot be changed.
F Bottom bracket height	The vertical distance from the center of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.
G Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's center of gravity.
H Chainstay length	The distance from the center of the bottom bracket to the center of the rear axle.
I Offset	The perpendicular distance from the steering axis to the center of the front wheel.
J Trail	The distance the front wheel's contact patch lags behind the steering axis.
K Wheelbase	The distance between the axles. Tailored to optimize weight distribution on each frame size.
L Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 8.25" in front of seat tube.
M Frame reach	The horizontal distance from the bottom bracket center to the top of the head tube centerline.
N Frame rise	The vertical distance from the bottom bracket center to the top of the head tube centerline.

NOTES

All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tires as well as different fork lengths will change the dimensions in these charts.



Models	Frame size*	A - Seat tube	B - Seat tube angle	Effective seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame rise
Fuel EX	15.5 in	36.7	73.0°	68.5°	10.8	68.0°	54.8	33.8	0.5	42.5	4.0	9.1	107.2	74.5	38.1	54.6
	17.5 in	41.9	73.0°	68.5°	12.2	68.0°	58.5	33.8	0.5	42.5	4.0	9.1	111.0	73.0	41.4	55.9
	18.5 in	44.5	73.0°	68.5°	13.2	68.0°	60.5	33.8	0.5	42.5	4.0	9.1	113.1	73.0	43.1	56.8
	19.5 in	47.0	73.0°	68.5°	14.0	68.0°	62.2	33.8	0.5	42.5	4.0	9.1	114.9	74.0	44.6	57.5
	21.5 in	50.8	73.0°	68.5°	15.7	68.0°	64.8	33.8	0.5	42.5	4.0	9.1	117.6	74.2	46.7	59.1
Rumblefish	15.5 in	40.1	73.6°	72.0°	10.5	69.8°	55.2	33.8	-3.2	45.2	5.1	8.2	110.4	78.6	38.7	60.4
	17.5 in	44.0	73.6°	72.0°	11.5	69.8°	58.5	33.8	-3.2	45.2	5.1	8.2	113.7	78.5	41.6	61.4
	19 in	47.8	73.6°	72.0°	12.5	69.8°	60.5	33.8	-3.2	45.2	5.1	8.2	115.7	78.5	43.4	62.3
	21 in	52.9	73.6°	72.0°	13.5	69.8°	62.6	33.8	-3.2	45.2	5.1	8.2	117.9	78.9	45.2	63.2
	23 in	57.9	73.6°	72.0°	14.5	69.8°	64.8	33.8	-3.2	45.2	5.1	8.2	120.2	79.6	47.1	64.2
Lush Carbon	14.5 in	36.8	73.5°		12.2	68.0°	52.8	33.8	0.5	43.0	4.0	9.1	106.2	68.8	36.5	55.0
	15.5 in	39.4	73.5°		12.2	68.0°	54.2	33.8	0.5	43.0	4.0	9.1	107.7	68.3	38.0	55.0
	16.5 in	41.9	73.5°		13.7	68.0°	56.1	33.8	0.5	43.0	4.0	9.1	109.7	68.1	39.4	56.4
	17.5 in	44.5	73.5°		13.7	68.0°	57.9	33.8	0.5	43.0	4.0	9.1	111.5	68.5	41.2	56.4
Lush SL Lush S Lush	14.5 in	36.8	73.5°		12.2	68.0°	52.8	33.8	0.5	43.0	4.0	9.1	106.2	68.5	36.5	55.0
	15.5 in	39.4	73.5°		12.2	68.0°	54.2	33.8	0.5	43.0	4.0	9.1	107.7	68.5	38.0	55.0
	16.5 in	41.9	73.5°		13.7	68.0°	56.1	33.8	0.5	43.0	4.0	9.1	109.7	68.5	39.4	56.4
	17.5 in	44.5	73.5°		13.7	68.0°	57.9	33.8	0.5	43.0	4.0	9.1	111.5	68.5	41.2	56.4
Stache	15.5 in	36.8	73.0°		10.3	68.3°	56.8	31.6		44.5	5.1	9.2	110.2	76.0	38.8	61.0
	17.5 in	41.9	72.5°		10.3	68.3°	60.0	31.6		44.5	5.1	9.2	112.8	77.7	41.4	61.0
	19 in	45.7	72.0°		10.3	68.6°	62.0	31.6		44.5	5.1	9.0	113.9	79.4	42.7	61.1
	21 in	50.8	72.0°		11.8	68.6°	64.0	31.6		44.5	5.1	9.0	116.1	82.4	44.3	62.5
	23 in	54.5	72.0°		11.8	68.6°	66.1	31.6		44.5	5.1	9.0	118.1	84.4	46.4	62.5
Remedy - Low geometry**	15.5 in	40.5	73.0°		11.5	67.0°	55.2	35.3	1.1	43.5	4.0	10.1	110.2	76.8	38.0	56.1
	17.5 in	42.0	73.0°		12.3	67.0°	58.8	35.3	1.1	43.5	4.0	10.1	113.9	76.6	41.4	56.9
	18.5 in	44.5	73.0°		12.3	67.0°	60.0	35.3	1.1	43.5	4.0	10.1	115.1	77.0	42.6	56.9
	19.5 in	47.0	73.0°		13.2	67.0°	61.2	35.3	1.1	43.5	4.0	10.1	116.4	77.8	43.5	57.7
	21.5 in	51.0	73.0°		15.5	67.0°	64.1	35.3	1.1	43.5	4.0	10.1	119.5	79.2	45.8	59.8
Remedy - High geometry**	15.5 in	40.5	73.5°		11.5	67.5°	55.0	36.0	1.7	43.4	4.0	9.9	110.0	77.3	38.5	55.8
	17.5 in	42.0	73.5°		12.3	67.5°	58.6	36.0	1.7	43.4	4.0	9.9	113.7	77.2	41.9	56.5
	18.5 in	44.5	73.5°		12.3	67.5°	59.8	36.0	1.7	43.4	4.0	9.9	114.9	77.6	43.1	56.5
	19.5 in	47.0	73.5°		13.2	67.5°	61.0	36.0	1.7	43.4	4.0	9.9	116.2	78.4	44.0	57.3
	21.5 in	51.0	73.5°		15.5	67.5°	63.9	36.0	1.7	43.4	4.0	9.9	119.3	79.8	46.3	59.4
Slash - Low geometry**	15.5 in	39.4	75.6°		12.3	66.3°	54.0	35.8	1.5	43.4	4.0	10.9	111.6	77.7	37.5	57.4
	17.5 in	42.0	75.3°		12.3	66.3°	57.3	35.8	1.5	43.4	4.0	10.9	114.9	76.6	40.8	57.4
	18.5 in	44.5	75.2°		12.3	66.3°	58.5	35.8	1.5	43.4	4.0	10.9	116.1	75.9	42.0	57.4
	19.5 in	47.1	75.0°		13.2	66.3°	59.8	35.8	1.5	43.4	4.0	10.9	117.4	76.3	43.0	58.2
	21.5 in	51.1	74.8°		15.5	66.3°	62.8	35.8	1.5	43.4	4.0	10.9	120.7	76.0	45.3	60.3
Slash - High geometry**	15.5 in	39.4	76.2°		12.3	66.9°	53.9	36.5	2.2	43.3	4.0	10.8	111.3	78.3	37.5	57.4
	17.5 in	42.0	75.9°		12.3	66.9°	57.2	36.5	2.2	43.3	4.0	10.8	114.6	77.2	40.1	57.4
	18.5 in	44.5	75.7°		12.3	66.9°	58.4	36.5	2.2	43.3	4.0	10.8	115.8	76.6	42.0	57.4
	19.5 in	47.1	75.6°		13.2	66.9°	59.6	36.5	2.2	43.3	4.0	10.8	117.2	77.0	43.0	58.2
	21.5 in	51.1	75.3°		15.5	66.9°	59.6	36.5	2.2	43.3	4.0	10.8	120.4	76.7	45.3	60.3
Session - Low geometry**	SM	41.3	57.0°		12.0	63.6°	57.3	35.6	1.3	44.1	4.5	12.0	116.9	78.0	37.9	60.2
	MD	44.0	57.0°		12.5	63.6°	58.8	35.6	1.3	44.1	4.5	12.0	118.4	78.0	39.4	60.6
	LG	44.0	57.0°		12.5	63.6°	61.3	35.6	1.3	44.1	4.5	12.0	120.9	77.2	41.9	60.6
	XL	48.7	57.0°		12.5	63.6°	63.4	35.6	1.3	44.1	4.5	12.0	123.0	76.8	44.0	60.6
Session - High geometry**	SM	41.3	57.6°		12.0	64.2°	56.6	36.0	2.1	43.9	4.5	11.9	116.6	78.0	38.3	60.5
	MD	44.0	57.6°		12.5	64.2°	58.2	36.0	2.1	43.9	4.5	11.9	118.1	78.0	39.8	60.9
	LG	44.0	57.6°		12.5	64.2°	60.7	36.0	2.1	43.9	4.5	11.9	120.6	78.0	42.3	60.9
	XL	48.7	57.6°		12.5	64.2°	62.7	36.0	2.1	43.9	4.5	11.9	122.7	78.0	44.4	60.9
Superfly 100 Pro SL Superfly 100 Elite SL Superfly 100 SL	15.5 in	39.4	73.8°	70.0°	10.5	70.0°	55.6	33.0	3.9	45.2	5.1	8.0	109.9	78.0	39.2	59.3
	17.5 in	44.5	73.8°	70.0°	11.5	70.0°	58.8	33.0	3.9	45.2	5.1	8.0	113.1	77.1	42.1	60.3
	19 in	48.3	73.8°	70.0°	12.5	70.0°	60.6	33.0	3.9	45.2	5.1	8.0	114.9	76.3	43.6	61.2
	21 in	53.3	73.8°	70.0°	13.5	70.0°	62.8	33.0	3.9	45.2	5.1	8.0	117.1	77.7	45.4	62.1
Superfly 100 AL Pro Superfly 100 AL Elite Superfly 100 AL	15.5 in	39.4	73.6°		10.5	71.0°	56.5	32.5	4.5	45.2	5.1	7.4	108.6	71.5	38.6	60.7
	17.5 in	44.5	73.6°		11.5	71.0°	59.7	32.5	4.5	45.2	5.1	7.4	111.8	75.1	41.6	61.6
	19 in	48.3	73.6°		12.5	71.0°	61.7	32.5	4.5	45.2	5.1	7.4	113.9	78.8	43.3	62.6
	21 in	53.3	73.6°		13.5	71.0°	63.8	32.5	4.5	45.2	5.1	7.4	115.9	83.7	45.1	63.5
	23 in	58.4	73.6°		14.5	71.0°	66.0	32.5	4.5	45.2	5.1	7.4	118.2	88.4	47.0	64.4

All dimensions are in centimeters unless otherwise stated.

Not all sizes are available for all models.


Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.


**Refers to high or low setting on adjustable-geometry bikes.

MOUNTAIN GEOMETRY /

Models	Frame size*	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame rise
Superfly Pro SL Superfly Elite SL	15.5 in	36.8	73.0°	10.3	69.3°	57.0	31.6	5.3	44.5	5.1	8.5	109.0	72.3	38.6	60.2
	17.5 in	41.6	72.5°	10.3	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	74.8	41.2	60.2
	19 in	45.7	72.0°	10.3	69.6°	62.2	31.6	5.3	44.5	5.1	8.3	112.7	76.9	42.6	60.3
	21 in	50.8	72.0°	11.8	69.6°	64.3	31.6	5.3	44.5	5.1	8.3	114.8	80.4	44.2	61.7
	23 in	54.5	72.0°	11.8	69.6°	66.3	31.6	5.3	44.5	5.1	8.3	116.9	82.6	46.2	61.7
Superfly Comp Superfly	15.5 in	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	77.5	38.6	60.2
	17.5 in	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	76.7	41.2	60.2
	19 in	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	76.6	42.6	60.3
	21 in	53.3	72.0°	11.8	69.6°	64.3	31.2	5.3	44.5	5.1	8.1	114.8	76.5	44.2	61.7
	23 in	58.4	72.0°	11.8	69.6°	66.3	32.1	5.3	44.5	5.1	8.1	116.9	77.0	46.2	61.7
Superfly AL Elite Superfly AL	15.5 in	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	74.6	38.6	60.2
	17.5 in	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	76.6	41.2	60.2
	19 in	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	78.4	42.6	60.3
	21 in	53.3	72.0°	11.8	69.6°	64.3	31.2	5.3	44.5	5.1	8.1	114.8	81.7	44.2	61.7
	23 in	58.4	72.0°	11.8	69.6°	66.3	31.2	5.3	44.5	5.1	8.1	116.9	84.6	46.2	61.7
29er Race 29er Sport	15.5 in	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	75.4	38.6	60.2
	17.5 in	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	77.5	41.2	60.2
	19 in	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	79.5	42.6	60.3
	21 in	53.3	72.0°	11.8	69.6°	64.3	31.2	5.3	44.5	5.1	8.1	114.8	82.8	44.2	61.7
	23 in	58.4	72.0°	11.8	69.6°	66.3	31.2	5.3	44.5	5.1	8.1	116.9	85.9	46.2	61.7
Rig	15.5 in	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	75.4	38.6	60.2
	17.5 in	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	77.5	41.2	60.2
	19 in	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	79.5	42.6	60.3
	21 in	53.3	72.0°	11.8	69.6°	64.3	31.2	5.3	44.5	5.1	8.1	114.8	82.8	44.2	61.7
	23 in	58.4	72.0°	11.8	69.6°	66.3	31.2	5.3	44.5	5.1	8.1	116.9	85.9	46.2	61.7
Cali	14 in	33.0	73.0°	10.0	69.0°	54.2	31.2		44.5	5.1	8.5	106.3	65.8	36.5	57.9
	15.5 in	36.8	73.0°	10.0	69.0°	57.0	31.2		44.5	5.1	8.5	109.3	65.8	38.7	59.8
	17 in	40.6	73.0°	10.0	69.0°	59.0	31.2		44.5	5.1	8.5	111.3	66.9	40.7	59.8
	18.5 in	44.5	73.0°	10.0	69.0°	61.2	31.2		44.5	5.1	8.5	113.5	68.5	42.9	59.8
4 Series	13.5 in	31.8	73.0°	10.0	69.5°	52.0	29.7		42.4	4.0	8.2	101.0	70.1	34.9	55.9
	15.5 in	36.8	73.0°	11.0	69.5°	55.0	29.7		42.4	4.0	8.2	104.0	72.1	37.6	56.9
	17.5 in	42.0	73.0°	12.5	69.5°	57.7	29.7		42.4	4.0	8.2	106.8	75.0	39.9	58.3
	18.5 in	44.5	73.0°	13.5	69.5°	59.1	29.7		42.4	4.0	8.2	108.3	76.6	41.0	59.2
	19.5 in	47.0	73.0°	14.5	69.5°	60.5	29.7		42.4	4.0	8.2	109.8	78.2	42.1	60.2
	21.5 in	52.1	73.0°	16.5	69.5°	63.0	29.7		42.4	4.0	8.2	112.4	81.7	44.0	62.0
	23.5 in	57.2	73.0°	18.5	69.5°	65.0	29.7		42.4	4.0	8.2	114.5	85.4	45.5	63.9
3 Series 820	13 in	33.0	74.0°	11.0	70.5°	52.4	28.7		43.0	4.0	7.6	101.9	70.5		
	16 in	40.6	73.5°	11.0	70.5°	55.0	29.1		43.0	4.0	7.6	104.0	73.8		
	18 in	45.7	73.5°	13.0	70.5°	56.5	29.3		43.0	4.0	7.6	105.7	77.2		
	19.5 in	49.5	73.0°	15.0	70.5°	58.0	29.3		43.0	4.0	7.6	106.8	79.9		
	21 in	53.3	73.0°	17.0	70.5°	59.0	29.3		43.0	4.0	7.6	107.9	82.7		
	22.5 in	57.2	72.5°	19.0	70.5°	60.0	29.5		43.0	4.0	7.6	108.4	85.7		
Skye SL Disc Skye SL	13 in	35.6	75.0°	11.0	69.5°	51.5	28.9		42.4	4.0	8.2	102.3	71.3		
	16 in	40.7	74.0°	11.0	70.0°	53.4	28.9		42.4	4.0	7.9	102.7	74.3		
	18 in	45.7	73.5°	11.0	70.0°	56.5	29.3		42.4	4.0	7.9	105.5	76.7		
Skye S Skye 820 WSD	13 in	33.0	74.0°	11.0	70.5°	52.4	28.7		43.0	4.0	7.6	101.9	65.5		
	16 in	40.6	73.5°	11.0	70.5°	54.6	29.1		43.0	4.0	7.6	103.6	63.1		
	19.5 in	49.5	73.0°	17.0	70.5°	57.5	29.3		43.0	4.0	7.6	106.4	62.5		




All dimensions are in centimeters unless otherwise stated.
 Not all sizes are available for all markets.
 Not all sizes are available in all markets.
 *Frame size represents fit. For seat tube length, see column A - Seat tube.



Models	Frame size	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover
7.7 FX	50 cm	74.6°	13.0	72.1°	52.1	26.4	41.0	4.5	6.1	97.4	70.7
	52 cm	74.2°	14.0	72.8°	53.4	26.4	41.0	4.5	5.7	97.7	72.9
	54 cm	73.7°	15.0	73.0°	54.3	26.6	41.0	4.5	5.6	98.1	74.2
	56 cm	73.3°	17.0	73.5°	56.0	26.6	41.0	4.0	5.8	98.3	76.7
	58 cm	73.0°	19.0	73.8°	57.3	26.6	41.1	4.0	5.6	99.2	78.6
	60 cm	72.8°	21.0	73.9°	58.6	26.8	41.1	4.0	5.6	100.1	80.4
7.6 FX, 7.5 FX 7.4 FX, 7.4 FX Disc 7.3 FX, Livestrong FX 7.2 FX, 7.2 FX Disc	43 cm	75.5°	12.4	71.4°	48.5	28.5	41.0	4.0	6.4	95.4	66.3
	47 cm	74.6°	12.0	71.2°	51.3	28.5	41.0	4.5	6.7	97.4	69.8
	50 cm	74.6°	13.0	72.1°	52.1	28.5	41.0	4.5	6.1	97.4	70.7
	52 cm	74.2°	14.0	72.8°	53.4	28.5	41.0	4.5	5.7	97.7	72.9
	54 cm	73.7°	15.0	73.0°	54.3	28.5	41.0	4.5	5.6	98.1	74.2
7.6 FX WSD 7.5 FX WSD 7.4 FX WSD 7.3 FX WSD 7.2 FX WSD Livestrong FX WSD	13 in	75.0°	11.5	70.0°	53.0	28.5	44.5	5.0	7.3	105.3	66.6
	15 in	75.0°	13.0	70.5°	53.3	28.5	44.5	5.0	7.0	105.3	69.7
	17 in	74.5°	15.0	70.5°	53.9	28.5	44.5	5.0	7.0	105.5	73.2
	19 in	74.0°	16.0	70.5°	55.3	28.5	44.5	5.0	7.0	106.4	76.7
	15 in stagger	74.5°	13.0	70.5°	54.3	28.5	44.5	5.0	7.0	105.6	62.7
	17.5 in stagger	74.0°	15.0	70.5°	54.8	28.5	44.5	5.0	7.0	105.7	63.2
	20 in stagger	73.5°	17.0	71.5°	56.8	28.5	44.5	4.5	7.0	105.7	63.6
7.1 FX	15 in	74.5°	11.5	70.5°	54.4	28.5	44.5	5.0	7.1	105.6	69.7
	17.5 in	74.0°	13.0	70.5°	54.8	28.5	44.5	5.0	7.1	105.6	73.8
	20 in	73.5°	16.0	71.5°	56.8	28.5	44.5	4.5	7.0	105.7	78.6
	22.5 in	73.0°	19.0	72.5°	59.0	28.5	44.5	4.5	6.3	106.3	83.4
	25 in	72.0°	22.0	72.5°	60.3	28.5	44.5	4.5	6.3	106.4	88.0
	15 in stagger	74.5°	13.0	70.5°	54.3	28.5	44.5	5.0	7.1	105.6	62.7
	17.5 in stagger	74.0°	15.0	70.5°	54.8	28.5	44.5	5.0	7.1	105.7	63.2
	20 in stagger	73.5°	17.0	71.5°	56.8	28.5	44.5	4.5	7.0	105.7	63.6
DS Series	15.5 in	74.0°	11.0	70.0°	57.5	28.7	45.5	3.8	8.3	109.0	66.6
	17.5 in	74.0°	12.0	71.0°	59.0	28.7	45.5	3.8	7.9	109.5	71.4
	19 in	73.5°	13.0	71.0°	60.5	28.7	45.5	3.8	7.9	110.5	76.2
	21 in	73.0°	14.0	71.5°	62.0	28.7	45.5	3.8	7.6	111.0	79.7
Neko	22.5 in	72.5°	15.0	72.0°	63.5	28.7	45.5	3.8	7.3	111.2	83.2
	16 in	74.0°	9.5	70.5°	56.0	30.6	44.0	3.8	8.5	106.0	70.8
	18 in	74.0°	10.5	71.0°	57.5	30.6	44.0	3.8	8.1	106.5	73.4
	14 in stagger	74.0°	13.5	70.5°	55.0	30.6	44.0	3.8	8.5	105.8	59.8
	16 in stagger	74.0°	13.5	70.5°	56.0	30.6	44.0	3.8	8.5	106.3	66.2
	18 in stagger	74.0°	13.5	71.0°	57.5	30.6	44.0	3.8	8.1	107.2	66.2
Soho Deluxe	15 in	74.5°	12.5	70.5°	54.7	28.4	45.0	4.5	7.6	106.0	68.6
	17.5 in	74.0°	14.0	70.5°	54.8	28.4	45.0	4.5	7.6	105.7	72.8
	20 in	73.5°	16.0	71.5°	56.5	28.4	45.0	4.5	6.9	105.8	77.2
	22.5 in	73.0°	18.0	72.5°	58.1	28.4	45.0	4.5	6.3	105.9	81.6
	25 in	72.0°	20.0	72.5°	59.2	28.4	45.0	4.5	6.3	105.8	85.9
District 9th District	52 cm	74.5°	12.0	72.0°	52.5	28.3	43.7	5.0	6.1	101.5	76.3
	54 cm	74.0°	14.0	72.0°	54.2	28.3	43.7	5.0	6.1	102.7	79.3
	56 cm	73.5°	16.0	72.5°	56.0	28.3	43.7	4.5	6.3	103.0	81.2
	58 cm	73.0°	18.0	72.5°	57.7	28.3	43.7	4.5	6.3	104.2	83.0
	60 cm	72.5°	20.0	72.5°	59.4	28.3	43.7	4.5	6.3	105.3	84.6
District S	50 cm	74.5°	13.0	70.5°	52.8	28.8	43.7	4.5	7.5	103.0	71.0
	54 cm	74.0°	15.0	70.5°	54.3	29.1	43.7	4.5	7.6	104.1	73.0
	56 cm	73.5°	17.0	71.5°	56.1	29.2	43.7	4.5	7.0	104.4	79.0
	58 cm	73.0°	19.0	72.5°	58.0	29.1	43.7	4.5	6.3	104.7	83.0
	60 cm	72.0°	21.0	72.5°	60.3	28.8	43.7	4.5	6.3	105.8	84.6

All dimensions are in centimeters unless otherwise stated.
 Not all sizes are available for all models.
 Not all sizes are available in all markets.

Models	Frame size	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover
Earl	60 cm	72.0 °	21.0	72.5 °	60.3	28.8	43.7	4.5	6.3	105.8	84.6
	49 cm	74.0 °	7.5	72.5 °	55.0	28.1	43.0	4.5	6.2	101.7	68.7
	54 cm	74.0 °	7.5	72.5 °	57.0	28.1	43.0	4.5	6.2	103.7	73.0
	57 cm	73.0 °	10.5	72.5 °	59.0	28.1	43.0	4.5	6.2	104.7	77.0
	61 cm	73.0 °	14.5	72.5 °	62.0	28.1	43.0	4.5	6.2	107.7	82.1
Allant	15 in	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	6.3	105.6	69.7
	17.5 in	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	6.3	105.6	73.8
	20 in	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	6.3	105.7	78.6
	22.5 in	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.3	106.3	83.4
Allant WSD	15 in	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.1	105.6	62.7
	17.5 in	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.7	63.2
	20 in	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.6
Transport Transport+	17 in	73.0 °	18.6	71.0 °	55.5	29.0	62.5	4.0	7.0	123.2	62.2
	20 in	73.0 °	21.6	71.0 °	60.0	29.0	62.5	4.0	7.0	127.8	63.1
Shift	14.5 in	65.5 °	13.7	69.0 °	59.4	28.2	49.5	5.0	7.4	108.0	67.0
	16.5 in	65.5 °	17.2	69.0 °	61.1	28.2	49.5	5.0	7.4	109.5	70.6
	18 in	65.5 °	17.2	69.0 °	62.0	28.2	49.5	5.0	7.4	110.3	72.7
	21 in	65.5 °	22.2	69.0 °	64.9	28.2	49.5	5.0	7.4	113.0	76.8
Shift WSD	13.5 in	65.5 °	16.2	69.0 °	59.1	28.2	49.5	5.0	7.4	107.5	50.3
	16.5 in	65.5 °	17.2	69.0 °	61.1	28.2	49.5	5.0	7.4	109.5	50.3
	19 in	65.5 °	19.7	69.0 °	63.3	28.2	49.5	5.0	7.4	111.5	50.3
Verve	15 in	73.0 °	10.0	70.5 °	57.2	28.5	46.5	5.1	7.0	109.0	71.5
	17.5 in	72.5 °	11.5	70.5 °	57.8	28.5	46.5	5.1	7.0	109.2	75.3
	20 in	72.0 °	12.5	70.5 °	59.4	28.5	46.5	5.1	7.0	110.3	78.9
	22.5 in	71.5 °	15.5	71.0 °	61.3	28.5	46.5	5.1	6.6	111.1	83.5
	25 in	71.5 °	20.5	71.0 °	62.0	28.5	46.5	5.1	6.6	111.8	89.0
Verve WSD	13.5 in	73.0 °	17.0	70.5 °	56.0	28.5	46.5	5.1	6.9	108.3	44.8
	16 in	72.5 °	18.0	70.5 °	57.5	28.5	46.5	5.1	7.0	109.2	44.8
	19 in	72.0 °	18.0	70.5 °	60.0	28.5	46.5	5.1	7.0	111.0	44.8
Cocoa	15 in	69.0 °	24.0	69.0 °	59.0	28.4	47.0	5.0	8.1	108.3	62.3
	19 in	69.0 °	28.0	69.0 °	61.0	28.4	47.0	5.0	8.1	110.3	62.3
Pure	16 in	68.0 °	23.5	69.0 °	68.5	28.5	60.0	5.0	7.4	117.5	72.6
Pure Lowstep	14 in	68.0 °	23.5	69.0 °	68.5	28.5	60.0	5.0		117.5	51.3
T 900	18.5 in Front	72.5 °	19.5	73.0 °	57.7	28.7	43.5	5.5	4.4	177.1	76.1
	14.5 in Rear	72.5 °			22.7	28.6					55.9
T80+	50 cm	73.5 °	16.0	70.5 °	57.7	28.4	45.5	4.5	7.5	109.0	72.4
	55 cm	73.0 °	16.0	71.0 °	59.4	28.4	45.5	4.5	7.2	110.0	76.9
	60 cm	73.0 °	18.0	71.0 °	60.8	28.4	45.5	4.5	7.2	111.0	81.7
	45 cm lowstep	74.5 °	16.0	70.5 °	58.0	27.5	46.5	4.5	7.6	111.0	41.5
	50 cm lowstep	73.5 °	18.0	70.5 °	60.0	27.5	46.5	4.5	7.6	111.8	41.5



All dimensions are in centimeters unless otherwise stated.
 Not all sizes are available for all models.
 Not all sizes are available in all markets.