




GEOMETRY GLOSSARY /

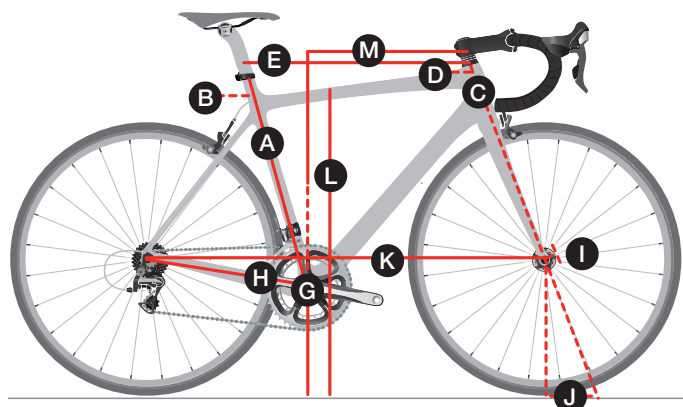

ROAD /

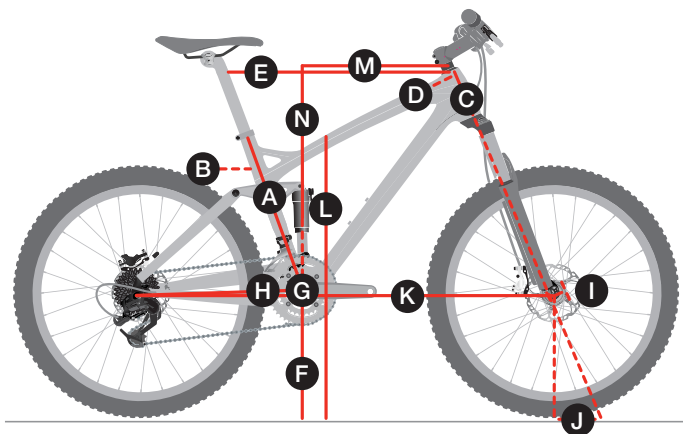

MOUNTAIN /

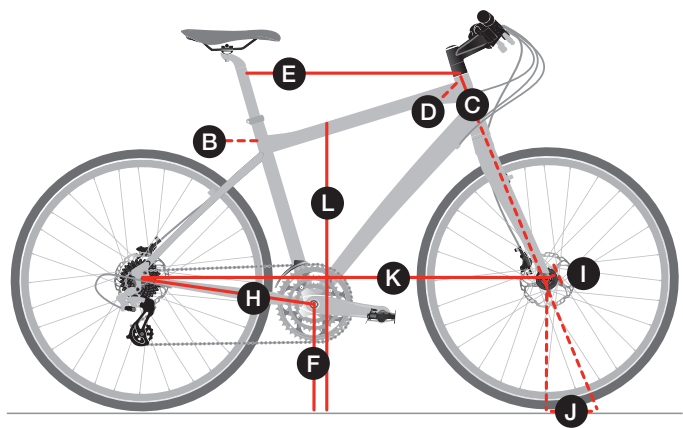

TOWN /

A	Seat tube	The distance from the center of the bottom bracket to the top of the seat tube.
B	Seat tube angle	The angle of seat tube to the ground. Tailored to optimize power transmission on each frame size.
C	Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.
D	Head angle	The angle of head tube to the ground. Tailored to optimize steering precision on each frame size.
E	Effective top tube	The horizontal measure from the center of the headset to the center of the seatpost. The most important measurement when buying a bike, because it cannot be changed.
F	Bottom bracket height	The vertical distance from the center of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.
G	Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's center of gravity.
H	Chainstay length	The distance from the center of the bottom bracket to the center of the rear axle.
I	Offset	The perpendicular distance from the steering axis to the center of the front wheel.
J	Trail	The distance the front wheel's contact patch lags behind the steering axis.
K	Wheelbase	The distance between the axles. Tailored to optimize weight distribution on each frame size.
L	Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 8.25" in front of seat tube.
M	Frame reach	The horizontal distance from the bottom bracket center to the top of the head tube centerline.
N	Frame stack	The vertical distance from the bottom bracket center to the top of the head tube centerline.

Notes

All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tires as well as different fork lengths will change the dimensions in these charts.

TREK MTB 2016

Models	Frame Size Number	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Top Fuel Low geometry**	15.5"	27.5"	39.4	69.5 °	10.0	69.9 °	55.8	33.0	2.5	42.6	4.7	8.0	106.4	75.7	39.2	56.1
	17.5"	29"	41.9	68.5 °	9.0	70.0 °	59.3	33.0	3.9	43.3	5.1	8.0	111.1	75.0	42.7	57.7
	18.5"	29"	44.5	68.5 °	9.0	70.0 °	60.9	33.0	3.9	43.3	5.1	8.0	112.7	74.1	44.3	57.7
	19.5"	29"	47.0	68.5 °	10.0	70.0 °	62.5	33.0	3.9	43.3	5.1	8.0	114.4	74.5	45.7	58.7
	21.5"	29"	52.1	68.5 °	12.0	70.0 °	64.6	33.0	3.9	43.3	5.1	8.0	116.3	75.1	46.4	60.6
Top Fuel High geometry**	15.5"	27.5"	39.4	70.5 °	10.0	70.9 °	55.8	34.1	1.4	42.4	4.7	7.9	106.3	76.6	40.1	55.4
	17.5"	29"	41.9	69.4 °	9.0	70.9 °	59.2	34.1	2.8	43.2	5.1	7.9	110.9	75.3	43.6	57.0
	18.5"	29"	44.5	69.4 °	9.0	70.9 °	60.9	34.1	2.8	43.2	5.1	7.9	112.5	77.7	45.2	57.0
	19.5"	29"	47.0	69.4 °	10.0	70.9 °	62.5	34.1	2.7	43.2	5.1	7.9	114.3	80.1	46.6	58.0
	21.5"	29"	52.1	69.4 °	12.0	70.9 °	64.6	34.1	2.7	43.2	5.1	7.9	116.5	82.5	48.1	60.5
Procaliber	15.5"	27.5"	39.4	73.0 °	10.0	69.3 °	55.8	30.2	4.8	42.5	4.4	8.3	105.3	72.7	38.2	58.3
	17.5"	29"	41.9	72.5 °	9.0	69.5 °	59.9	31.1	5.8	43.5	5.1	8.3	109.8	75.0	41.2	59.5
	18.5"	29"	44.5	72.0 °	9.0	69.5 °	61.7	31.1	5.8	43.5	5.1	8.3	111.3	76.4	42.7	59.5
	19.5"	29"	47.0	72.0 °	10.0	69.5 °	63.8	31.1	5.8	43.5	5.1	8.3	113.2	77.8	44.2	60.4
	21.5"	29"	52.1	72.0 °	12.0	69.5 °	65.9	31.1	5.8	43.5	5.1	8.3	115.4	81.6	45.7	62.3
Superfly Carbon	15.5"	27.5"	36.8	73.0 °	10.0	69.3 °	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.7	41.2	60.0
	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.9	42.7	60.1
	19.5"	29"	47.0	72.0 °	10.0	69.6 °	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.2	44.3	60.1
	21.5"	29"	52.1	72.0 °	12.0	69.6 °	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.9	45.7	61.9
Superfly AL	23"	29"	55.9	72.0 °	12.0	69.6 °	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.7	47.1	61.9
Superfly AL	15.5"	27.5"	36.8	73.0 °	10.0	69.3 °	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	19.5"	29"	47.0	72.0 °	10.0	69.6 °	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.5	44.3	60.1
	21.5"	29"	52.1	72.0 °	12.0	69.6 °	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.3	45.7	61.9
Superfly SS	23"	29"	55.9	72.0 °	12.0	69.6 °	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.4	47.1	61.9
Superfly SS	15.5"	29"	36.8	73.0 °	10.0	69.3 °	57.0	31.1	5.8	43.5	5.1	8.5	107.7	74.7	38.6	60.0
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	19.5"	29"	47.0	72.0 °	10.0	69.6 °	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.5	44.3	60.1
	21.5"	29"	52.1	72.0 °	12.0	69.6 °	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.3	45.7	61.9
Superfly Carbon WSD	23"	29"	55.9	72.0 °	12.0	69.6 °	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.4	47.1	61.9
	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	54.1	30.2	4.8	42.5	4.4	8.7	103.7	71.0	37.0	56.3
	15.5"	27.5"	36.8	73.0 °	10.0	69.3 °	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.7	41.2	60.0
Superfly AL WSD	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.9	42.7	60.1
	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	54.1	30.2	4.8	42.5	4.4	8.7	103.7	71.0	37.0	56.3
	15.5"	27.5"	36.8	73.0 °	10.0	69.3 °	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
X-Caliber	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0 °	10.0	69.3 °	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
Cali	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29"	47.0	72.0 °	10.0	69.6 °	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
	21.5"	29"	52.1	72.0 °	12.0	69.6 °	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	29"	55.9	72.0 °	12.0	69.6 °	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
Fuel EX 29 Low geometry**	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0 °	10.0	69.3 °	56.0	30.6	4.8	43.8	4.4	8.7	106.6	68.0	38.1	58.5
	17"	29"	40.6	73.0 °	10.0	69.0 °	59.0	31.2		44.5	5.1	8.5	111.3	66.9	40.7	59.8
	18.5"	29"	44.5	73.0 °	10.0	69.0 °	61.2	31.2		44.5	5.1	8.5	113.5	68.5	42.9	59.8
Fuel EX 29 Low geometry**	15.5"	29"	39.4	67.0 °	10.5	68.8 °	57.2	33.4	3.6	43.6	5.1	8.9	110.5	78.0	39.5	60.2
	17.5"	29"	42.0	67.0 °	10.5	68.8 °	60.3	33.4	3.6	43.6	5.1	8.9	113.6	76.6	42.6	60.2
	18.5"	29"	44.5	67.0 °	11.5	68.8 °	61.7	33.4	3.6	43.6	5.1	8.9	115.1	78.0	43.7	61.1
	19.5"	29"	47.0	67.0 °	11.5	68.8 °	63.2	33.4	3.6	43.6	5.1	8.9	116.6	77.3	45.2	61.1
	21.5"	29"	50.8	67.0 °	13.0	68.8 °	65.5	33.4	3.6	43.6	5.1	8.9	119.0	78.3	47.1	62.5

	23"	29"	55.9	67.0 °	14.5	68.8 °	66.8	33.4	3.6	43.6	5.1	8.9	120.5	78.4	48.0	63.9
Fuel EX 29	15.5"	29"	39.4	67.7 °	10.5	69.4 °	57.0	34.2	2.3	43.4	5.1	8.9	110.4	78.7	40.2	59.7
High geometry**	17.5"	29"	42.0	67.7 °	10.5	69.4 °	60.1	34.2	2.3	43.4	5.1	8.9	113.5	77.3	43.3	59.7
	18.5"	29"	44.5	67.7 °	11.5	69.4 °	61.5	34.2	2.3	43.4	5.1	8.9	115.0	78.7	44.4	60.6
	19.5"	29"	47.0	67.7 °	11.5	69.4 °	63.0	34.2	2.3	43.4	5.1	8.9	116.5	78.0	45.9	60.6
	21.5"	29"	50.8	67.7 °	13.0	69.4 °	65.3	34.2	2.3	43.4	5.1	8.9	118.9	79.0	47.8	62.0
	23"	29"	55.9	67.7 °	14.5	69.4 °	66.6	34.2	2.3	43.4	5.1	8.9	120.4	79.2	48.7	63.4
Fuel EX 27.5	15.5"	27.5"	36.8	73.0 °	9.5	68.0 °	55.5	33.3	1.7	43.3	4.4	8.4	110.1	74.0	37.4	56.0
	17.5"	27.5"	41.9	73.0 °	10.0	68.0 °	58.8	33.3	1.7	43.3	4.4	8.4	113.7	73.0	41.5	65.5
	18.5"	27.5"	44.5	73.0 °	11.0	68.0 °	60.8	33.3	1.7	43.3	4.4	8.4	115.5	73.0	43.2	57.4
	19.5"	27.5"	47.0	73.0 °	12.0	68.0 °	62.7	33.3	1.7	43.3	4.4	8.4	117.0	74.0	44.9	58.3
	21.5"	27.5"	52.1	73.0 °	14.0	68.0 °	65.3	33.3	1.7	43.3	4.4	8.4	119.4	74.2	46.9	60.2
Lush Carbon	14"	27.5"	35.5	74.0 °	9.5	68.0 °	53.0	33.5	1.5	43.3	4.4	9.4	107.0	69.1	37.0	55.9
	15.5"	27.5"	39.4	74.0 °	9.5	68.0 °	55.0	33.5	1.5	43.3	4.4	9.4	109.0	68.8	39.0	55.9
	17"	27.5"	40.6	74.0 °	10.5	68.0 °	58.0	33.5	1.5	43.3	4.4	9.4	112.1	68.7	41.7	56.8
	18.5"	27.5"	44.5	74.0 °	12.0	68.0 °	60.5	33.5	1.5	43.3	4.4	9.4	114.7	69.0	43.8	58.2
Lush AL	14"	27.5"	35.5	74.0 °	9.5	68.0 °	53.0	33.5	1.5	43.3	4.4	9.4	107.0	69.1	37.0	55.9
	15.5"	27.5"	39.4	74.0 °	9.5	68.0 °	55.0	33.5	1.5	43.3	4.4	9.4	109.0	68.2	39.0	55.9
	17"	27.5"	40.6	74.0 °	10.5	68.0 °	58.0	33.5	1.5	43.3	4.4	9.4	112.1	68.7	41.7	56.8
	18.5"	27.5"	44.5	74.0 °	12.0	68.0 °	60.5	33.5	1.5	43.3	4.4	9.4	114.7	68.8	43.8	58.2
Stache 9	15.5"	29"	39.4	68.9 °	9.0	68.4 °	56.3	32.9	6.1	42	5.1	10.0	107.1	79.8	37.9	62.1
Stache 7	17.5"	29"	41.9	68.9 °	9.0	68.4 °	59.1	32.9	6.1	42	5.1	10.0	109.9	80.9	40.7	62.1
	18.5"	29"	44.5	68.9 °	10.0	68.4 °	60.9	32.9	6.1	42	5.1	10.0	111.7	82.0	42.1	63.0
	19.5"	29"	47.0	68.9 °	10.0	68.4 °	62.4	32.9	6.1	42	5.1	10.0	113.2	80.8	43.6	63.0
	21.5"	29"	52.1	68.9 °	11.0	68.4 °	64.6	32.9	6.1	42	5.1	10.0	115.5	80.8	45.6	64.0
Stache 5	15.5"	29"	39.4	70.8 °	9.0	70.3 °	55.5	31.3	7.5	42	5.1	8.5	105.7	77.8	40.1	60.7
	17.5"	29"	41.9	70.8 °	9.0	70.3 °	58.3	31.3	7.5	42	5.1	8.5	108.5	79.1	43	60.6
	18.5"	29"	44.5	70.8 °	10.0	70.3 °	60.1	31.3	7.5	42	5.1	8.5	110.3	80.3	44.3	61.5
	19.5"	29"	47.0	70.8 °	10.0	70.3 °	61.6	31.3	7.5	42	5.1	8.5	111.8	79.2	45.8	61.5
	21.5"	29"	52.1	70.8 °	11.0	70.3 °	63.8	31.3	7.5	42	5.1	8.5	114.0	79.2	47.7	62.4
Farley 5	15.5"	26"	36.8	73.0 °	10.0	69.0 °	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8
Farley 7	17.5"	26"	41.9	73.0 °	10.0	69.0 °	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75	41	59.8
	19.5"	26"	47.0	73.0 °	12.0	69.0 °	63.0	31.5	6.5	44.0	5.1	9.1	114.3	77.8	44.1	61.7
	21.5"	26"	52.1	73.0 °	12.0	69.0 °	64.3	31.5	6.5	44.0	5.1	9.1	115.6	81.6	45.4	61.7
Farley 9	15.5"	27.5"	36.8	70.5	10.0	68.0 °	56.6	32.2	5.7	44.0	5.1	10	108.4	76.4	37.2	60.5
	17.5"	27.5"	41.9	70.5	10.0	68.0 °	59.3	32.2	5.7	44.0	5.1	10	111.1	75	40	60.5
	19.5"	27.5"	47.0	70.5	12.0	68.0 °	63.0	32.2	5.7	44.0	5.1	10	115	77.8	43	62.5
	21.5"	27.5"	52.1	70.5	12.0	68.0 °	64.3	32.2	5.7	44.0	5.1	10	116.3	81.6	44.4	62.5
Farley 9.8	15.5"	27.5"	36.8	73.0 °	10.0	69.0 °	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8
Farley 9.6	17.5"	27.5"	41.9	73.0 °	10.0	69.0 °	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75	41	59.8
	19.5"	27.5"	47.0	73.0 °	12.0	69.0 °	63.0	31.5	6.5	44.0	5.1	9.1	114.3	77.8	44.1	61.7
	21.5"	27.5"	52.1	73.0 °	12.0	69.0 °	64.3	31.5	6.5	44.0	5.1	9.1	115.6	81.6	45.4	61.7
Remedy Carbon 27.5	15.5"	27.5"	39.4	67.5 °	10.0	67.5 °	54.9	33.8	1.5	43.5	4.3	10.0	109.8	77.2	36.6	59.3
Low geometry**	17.5"	27.5"	41.9	67.5 °	10.0	67.5 °	58.2	33.8	1.5	43.5	4.3	10.0	113.1	75.8	39.4	69.4
	18.5"	27.5"	44.5	67.5 °	10.5	67.5 °	60.1	33.8	1.5	43.5	4.3	10.0	115.1	74.4	41.7	69.9
	19.5"	27.5"	47.0	67.5 °	11.0	67.5 °	61.8	33.8	1.5	43.5	4.3	10.0	116.7	74.2	43.2	60.4
	21.5"	27.5"	50.8	67.5 °	12.5	67.5 °	64.6	33.8	1.5	43.5	4.3	10.0	119.6	73.9	45.5	61.8
Remedy Carbon 27.5	15.5"	27.5"	39.4	68.2 °	10.0	68.2 °	54.6	34.6	.7	43.3	4.3	9.5	109.7	77.9	37.3	58.9
High geometry**	17.5"	27.5"	41.9	68.2 °	10.0	68.2 °	57.9	34.6	.7	43.3	4.3	9.5	113.0	76.5	40.6	58.9
	18.5"	27.5"	44.5	68.1 °	10.5	68.1 °	59.8	34.6	.7	43.3	4.3	9.5	114.9	75.1	42.4	59.4
	19.5"	27.5"	47.0	68.1 °	11.0	68.1 °	61.5	34.6	.7	43.3	4.3	9.5	116.6	74.9	43.9	59.9
	21.5"	27.5"	50.8	68.1 °	12.5	68.1 °	64.3	34.6	.7	43.3	4.3	9.5	119.3	74.6	46.1	61.3
Remedy AL 27.5	15.5"	27.5"	39.4	67.5 °	10.0	67.5 °	54.9	33.8	1.5	43.5	4.3	10.0	109.8	77.6	36.6	59.3
Low geometry**	17.5"	27.5"	41.9	67.5 °	10.0	67.5 °	58.2	33.8	1.5	43.5	4.3	10.0	113.1	75.8	39.4	69.4
	18.5"	27.5"	44.5	67.5 °	10.5	67.5 °	60.1	33.8	1.5	43.5	4.3	10.0	115.1	74.4	41.7	69.9
	19.5"	27.5"	47.0	67.5 °	11.0	67.5 °	61.8	33.8	1.5	43.5	4.3	10.0	116.7	74.0	43.2	60.4
	21.5"	27.5"	50.8	67.5 °	12.5	67.5 °	64.6	33.8	1.5	43.5	4.3	10.0	119.6	74.5	45.5	61.8
Remedy AL 27.5	15.5"	27.5"	39.4	68.2 °	10.0	68.2 °	54.6	34.6	.7	43.3	4.3	9.5	109.7	78.2	37.3	58.9
High geometry**	17.5"	27.5"	41.9	68.2 °	10.0	68.2 °	57.9	34.6	.7	43.3	4.3	9.5	113.0	76.5	40.6	58.9
	18.5"	27.5"	44.5	68.1 °	10.5	68.1 °	59.8	34.6	.7	43.3	4.3	9.5	114.9	75.1	42.4	59.4
	19.5"	27.5"	47.0	68.1 °	11.0	68.1 °	61.5	34.6	.7	43.3	4.3	9.5	116.6	74.7	43.9	59.9
	21.5"	27.5"	50.8	68.1 °	12.5	68.1 °	64.3	34.6	.7	43.3	4.3	9.5	119.3	75.3	46.1	61.3
Remedy Carbon 29	15.5"	29"	39.4	68.0 °	10.0	67.5 °	54.6	35.0	2.0	44.5	5.1	9.8	112.8	77.1	38.6	60.5
Low geometry**	17.5"	29"	41.9	68.0 °	10.0	67.5 °	57.6	35.0	2.0	44.5	5.1	9.8	115.8	76.7	41.6	60.5
	18.5"	29"	44.5	68.0 °	10.5	67.5 °	59.4	35.0	2.0	44.5	5.1	9.8	117.5	74.5	43.2	60.9

	19.5"	29"	47.0	68.0 °	11.0	67.5 °	60.9	35.0	2.0	44.5	5.1	9.8	119.0	75.1	44.7	60.9
	21.5"	29"	52.1	68.0 °	12.5	67.5 °	63.1	35.0	2.0	44.5	5.1	9.8	121.2	76.6	46.5	61.9
Remedy Carbon 29	15.5"	29"	39.4	69.0 °	10.0	68.2 °	54.4	35.9	2.0	44.3	5.1	9.3	112.6	77.9	39.3	60.0
High geometry**	17.5"	29"	41.9	69.0 °	10.0	68.2 °	57.3	35.9	2.0	44.3	5.1	9.3	115.6	77.5	42.3	60.0
	18.5"	29"	44.5	69.0 °	10.5	68.2 °	59.1	35.9	2.0	44.3	5.1	9.3	117.4	75.3	43.9	60.4
	19.5"	29"	47.0	69.0 °	11.0	68.2 °	60.6	35.9	2.0	44.3	5.1	9.3	118.9	75.9	45.4	60.4
	21.5"	29"	52.1	69.0 °	12.5	68.2 °	62.8	35.9	2.0	44.3	5.1	9.3	121.1	77.5	47.2	61.3
Remedy AL 29	15.5"	29"	39.4	68.0 °	10.0	67.5 °	54.6	35.0	2.0	44.5	5.1	9.8	112.8	77.9	38.5	60.6
Low geometry**	17.5"	29"	41.9	68.0 °	10.0	67.5 °	57.6	35.0	2.0	44.5	5.1	9.8	115.8	76.5	41.5	60.6
	19"	29"	45.7	68.0 °	10.5	67.5 °	59.7	35.0	2.0	44.5	5.1	9.8	117.9	76.8	43.4	61.1
	21"	29"	50.8	68.0 °	11.0	67.5 °	61.8	35.0	2.0	44.5	5.1	9.8	120.0	78.1	45.1	62.0
	23"	29"	55.9	68.0 °	12.5	67.5 °	63.9	35.0	2.0	44.5	5.1	9.8	122.1	81.8	46.9	62.9
Remedy AL 29	15.5"	29"	39.4	69.0 °	10.0	68.2 °	54.4	35.9	2.0	44.3	5.1	9.3	112.7	76.9	39.3	60.6
High geometry**	17.5"	29"	41.9	69.0 °	10.0	68.2 °	57.4	35.9	2.0	44.3	5.1	9.3	115.7	75.5	42.3	60.6
	19"	29"	45.7	69.0 °	10.5	68.2 °	59.4	35.9	2.0	44.3	5.1	9.3	117.7	75.8	44.1	61.1
	21"	29"	50.8	69.0 °	11.0	68.2 °	61.5	35.9	2.0	44.3	5.1	9.3	119.8	77.1	45.9	62.0
	23"	29"	55.9	69.0 °	12.5	68.2 °	63.6	35.9	2.0	44.3	5.1	9.3	121.9	80.8	47.6	62.9
Slash	15.5"	27.5"	39.4	66.5 °	10.0	65.0 °	55.7	35.0	.6	43.5	4.4	11.7	114.9	79.5	39.7	58.1
Low geometry**	17.5"	27.5"	41.9	66.5 °	10.0	65.0 °	58.7	35.0	.6	43.5	4.4	11.7	117.9	77.7	42.7	58.1
	18.5"	27.5"	44.5	66.5 °	10.0	65.0 °	60.0	35.0	.6	43.5	4.4	11.7	119.2	76.2	44.0	58.1
	19.5"	27.5"	47.0	66.5 °	11.0	65.0 °	61.4	35.0	.6	43.5	4.4	11.7	120.5	75.6	45.0	59.0
	21.5"	27.5"	52.1	66.5 °	12.0	65.0 °	64.2	35.0	.6	43.5	4.4	11.7	123.4	74.5	47.4	59.9
Slash	15.5"	27.5"	39.4	67.2 °	10.0	65.7 °	55.5	35.8	-.2	43.3	4.4	11.7	114.7	80.2	40.4	57.6
High geometry**	17.5"	27.5"	41.9	67.1 °	10.0	65.6 °	58.5	35.8	-.2	43.3	4.4	11.7	117.7	78.4	43.4	57.6
	18.5"	27.5"	44.5	67.1 °	10.0	65.6 °	59.8	35.8	-.2	43.3	4.4	11.7	119.0	76.9	44.7	57.6
	19.5"	27.5"	47.0	67.1 °	11.0	65.6 °	61.1	35.9	-.3	43.3	4.4	11.7	120.4	76.4	45.6	58.5
	21.5"	27.5"	52.1	67.1 °	12.0	65.6 °	64.5	35.9	-.3	43.3	4.4	11.7	123.2	75.3	48.0	59.4
Session DH	S	27.5"	39.0	57.0 °	11.5	63.6 °	47.7	35.6	1.0	44.5	5.2	11.8	118.3	80.4	38.2	60.7
Low geometry**	M	27.5"	39.0	57.0 °	11.5	63.6 °	51.5	35.6	1.0	44.5	5.2	11.8	120.3	79.0	40.2	60.7
	L	27.5"	39.0	57.0 °	11.5	63.6 °	53.9	35.6	1.0	44.5	5.2	11.8	122.7	78.4	42.6	60.7
	XL	27.5"	39.0	57.0 °	11.5	63.6 °	58.4	35.6	1.0	44.5	5.2	11.8	125.1	76.7	45.0	60.7
Session DH	S	27.5"	39.0	57.6 °	11.5	64.2 °	57.0	36.4	1.4	44.3	5.2	11.4	118.5	81.0	38.9	60.3
High geometry**	M	27.5"	39.0	57.6 °	11.5	64.2 °	59.0	36.4	1.4	44.3	5.2	11.4	120.5	79.3	40.8	60.3
	L	27.5"	39.0	57.6 °	11.5	64.2 °	61.4	36.4	1.4	44.3	5.2	11.4	122.9	79.0	43.2	60.3
	XL	27.5"	39.0	57.6 °	11.5	64.2 °	63.8	36.4	1.4	44.3	5.2	11.4	125.3	77.5	45.6	60.3
Session Park	M	26"	44.0	57.0 °	12.5	63.6 °	58.6	35.6	1.3	42.0	4.5	12.0	116.3	74.7	39.2	59.3
Low geometry**	L	26"	44.0	57.0 °	12.5	63.6 °	61.0	35.6	1.3	42.0	4.5	12.0	118.8	74.7	41.7	59.3
Session Park	M	26"	44.0	57.6 °	12.5	64.2 °	58.2	36.4	2.1	41.8	4.5	11.9	116.0	75.4	39.8	58.8
High geometry**	L	26"	44.0	57.6 °	12.5	64.2 °	60.7	36.4	2.1	41.8	4.5	12.0	118.0	75.4	42.3	58.9
Ticket S	Long	26"	33.1	75.0 °	12.3	68.5 °	56.5	33.0	0.3	40.0	4.0	8.8	108.5	37.5	42.6	55.3
Low geometry**	Long	26"	33.1	75.8 °	12.3	69.3 °	56.3	33.9	0.6	39.8	4.0	8.8	108.3	38.3	43.3	54.7
Ticket S	Long	26"	33.1	75.8 °	12.3	69.3 °	56.3	33.9	0.6	39.8	4.0	8.8	108.3	38.3	43.3	54.7
High geometry**	Long	26"	33.1	75.8 °	12.3	69.3 °	56.3	33.9	0.6	39.8	4.0	8.8	108.3	38.3	43.3	54.7
Ticket DJ	Long	26"	33.0	71.0 °	12.0	70.0 °	57.0	32.0	1.2	39.8	4.0	7.7	105.0	69.1	41.4	54.3
Marlin	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0 °	10.0	69.3 °	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29"	41.9	72.5 °	10.0	69.3 °	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	29"	44.4	72.3 °	10.0	69.6 °	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29"	47.0	72.0 °	10.0	69.6 °	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
	21.5"	29"	52.1	72.0 °	12.0	69.6 °	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	29"	55.9	72.0 °	12.0	69.6 °	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
Skye SL Disc	13.5"	27.5"	34.3	73.0 °	10.0	69.0 °	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
Skye S Disc	15.5"	27.5"	39.4	73.0 °	10.0	69.3 °	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17"	29"	40.6	73.0 °	10.0	69.0 °	59.0	31.2		44.5	5.1	8.5	111.3	66.9	40.7	59.8
	18.5"	29"	44.5	73.0 °	10.0	69.0 °	61.2	31.2		44.5	5.1	8.5	113.5	68.5	42.9	59.8
Skye 26	13"	26"	33.0	74.0 °	11.0	70.5 °	52.4	28.7		43.0	4.0	7.6	101.9	65.5		
	16"	26"	40.6	73.5 °	11.0	70.5 °	54.6	29.1		43.0	4.0	7.6	103.6	63.1		
	19.5"	26"	49.5	73.0 °	17.0	70.5 °	57.5	29.3		43.0	4.0	7.6	106.4	62.5		
3 Series	13"	26"	33.0	74.0 °	11.0	70.5 °	52.4	28.7		43.0	4.0	7.6	101.9	70.5		
	16"	26"	40.6	73.5 °	11.0	70.5 °	55.0	29.1		43.0	4.0	7.6	104.0	73.8		
	18"	26"	45.7	73.5 °	13.0	70.5 °	56.5	29.3		43.0	4.0	7.6	105.7	77.2		
	19.5"	26"	49.5	73.0 °	15.0	70.5 °	58.0	29.3		43.0	4.0	7.6	106.8	79.9		
	21"	26"	53.3	73.0 °	17.0	70.5 °	59.0	29.3		43.0	4.0	7.6	107.9	82.7		
	22.5"	26"	57.2	72.5 °	19.0	70.5 °	60.0	29.5		43.0	4.0	7.6	108.4	85.7		
Police	15.5"	29"	39.4	73.0 °	10.3	69.3 °	57.0	31.2	5.3	44.5	5.1	8.3	109.0	75.4	38.6	60.2
	17.5"	29"	44.5	72.5 °	10.3	69.3 °	60.2	31.2	5.3	44.5	5.1	8.3	111.6	77.5	41.2	60.2

	19"	29"	48.3	72.0 °	10.3	69.6 °	62.2	31.2	5.3	44.5	5.1	8.1	112.7	79.5	42.6	60.3
	21"	29"	53.3	72.0 °	11.8	69.6 °	64.3	31.2	5.3	44.5	5.1	8.1	114.8	82.8	44.2	61.7
	23"	29"	58.4	72.0 °	11.8	69.6 °	66.3	31.2	5.3	44.5	5.1	8.1	116.9	85.9	46.2	61.7
Powerfly+ FS	15.5"	29"	36.8	71.0 °	13.0	68.0 °	55.5	33.3	1.7	47.0	4.4	9.4	110.1	73.0	38.9	59.5
	17.5"	29"	41.9	71.0 °	13.2	68.0 °	58.0	33.3	1.7	47.0	4.4	9.4	112.6	73.0	42.2	59.5
	18.5"	29"	44.5	71.0 °	14.0	68.0 °	60.5	33.3	1.7	47.0	4.4	9.4	115.1	73.0	39.8	60.2
	19.5"	29"	47.0	71.0 °	14.0	68.0 °	62.7	33.3	1.7	47.0	4.4	9.4	117.3	73.0	42.0	60.2
	21.5"	29"	52.1	71.0 °	16.0	68.0 °	65.3	33.3	1.7	47.0	4.4	9.4	120.0	73.0	43.9	62.1
Powerfly+	15.5"	29"	40.0	73.0 °	14.0	69.0 °	56.1	33.2	5.3	48.5	5.1		112.0	78.8	36.5	63.8
	17.5"	29"	42.5	72.5 °	14.0	69.0 °	58.3	33.2	5.3	48.5	5.1		113.7	79.0	38.2	63.8
	19"	29"	47.0	72.5 °	16.0	69.0 °	60.7	33.2	5.3	48.5	5.1		116.2	81.1	40.0	65.6
	21"	29"	51.5	72.5 °	16.0	69.0 °	63.2	33.2	5.3	48.5	5.1		118.7	84.3	42.5	65.6
Powerfly+ WSD	15.5"	29"	40.0	73.0 °	14.0	69.0 °	55.5	32.0	4.8	46.5	4.4		109.5	72.5	36.5	62.1
	17.5"	29"	42.5	72.5 °	14.0	69.0 °	57.8	32.0	4.8	46.5	4.4		111.2	72.0	38.2	62.1

TREK ROAD 2016

Models	Frame Size Number	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
H1 Fit Madone	50cm	700c	45.3	74.6 °	10.0	72.1 °	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	55.6	73.5	62.5
	52cm	700c	48.2	74.2 °	11.0	72.8 °	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	56.8	76.5	65.5
	54cm	700c	49.6	73.7 °	12.0	73.0 °	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	57.6	79.0	68.0
	56cm	700c	52.5	73.3 °	14.0	73.5 °	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	59.9	82.0	71.0
	58cm	700c	55.3	73.0 °	16.0	73.8 °	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	61.7	84.0	73.0
	60cm	700c	57.3	72.8 °	18.0	73.9 °	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	63.6	86.0	75.0
	62cm	700c	59.3	72.5 °	20.0	73.9 °	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	65.6	88.0	77.0
H2 Fit Madone	44cm	700c	40.8	74.6 °	10.0	70.4 °	49.9	7.2	41.0	5.0	6.8	97.1	68.2	36.2	54.9	66.5	55.5
	47cm	700c	44.4	74.6 °	11.5	71.2 °	51.3	7.2	41.0	4.5	6.7	97.4	69.8	36.9	57.2	70.5	59.5
	50cm	700c	47.6	74.6 °	13.0	72.1 °	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	58.5	73.5	62.5
	52cm	700c	49.3	74.2 °	14.0	72.8 °	53.4	7.2	41.0	4.5	5.7	97.7	72.9	37.9	59.7	76.5	65.5
	54cm	700c	50.6	73.7 °	15.5	73.0 °	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	60.5	79.0	68.0
	56cm	700c	53.3	73.3 °	17.0	73.5 °	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	62.7	82.0	71.0
	58cm	700c	55.3	73.0 °	19.0	73.8 °	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	64.6	84.0	73.0
	60cm	700c	57.3	72.8 °	21.0	73.9 °	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	66.5	86.0	75.0
H1 Fit Émonda Domane Koppenberg	62cm	700c	59.3	72.5 °	23.0	73.9 °	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	68.4	88.0	77.0
	64cm	700c	61.3	72.3 °	25.0	74.0 °	61.0	6.8	41.3	4.0	5.5	101.8	84.1	40.1	70.4	91.0	80.0
	50cm	700c	45.3	74.6 °	10.0	72.1 °	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	50.6	72.5	62.5
	52cm	700c	48.2	74.2 °	11.0	72.8 °	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	51.8	75.5	65.5
	54cm	700c	49.6	73.7 °	12.0	73.0 °	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	52.6	78.0	68.0
	56cm	700c	52.5	73.3 °	14.0	73.5 °	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	54.9	81.0	71.0
	58cm	700c	55.3	73.0 °	16.0	73.8 °	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	56.7	83.0	73.0
H2 Fit Émonda	60cm	700c	57.3	72.8 °	18.0	73.9 °	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	58.6	85.0	75.0
	62cm	700c	59.3	72.5 °	20.0	73.9 °	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	60.6	87.0	77.0
	44cm	700c	40.8	74.6 °	10.0	70.4 °	49.9	7.2	41.0	5.0	6.8	97.1	68.2	36.2	49.9	65.5	55.5
	47cm	700c	44.4	74.6 °	11.5	71.2 °	51.3	7.2	41.0	4.5	6.7	97.4	69.8	36.9	52.2	69.5	59.5
	50cm	700c	47.6	74.6 °	13.0	72.1 °	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	53.5	72.5	62.5
	52cm	700c	49.3	74.2 °	14.0	72.8 °	53.4	7.2	41.0	4.5	5.7	97.7	72.9	37.9	54.7	75.5	65.5
	54cm	700c	50.6	73.7 °	15.5	73.0 °	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	55.5	78.0	68.0
	56cm	700c	53.3	73.3 °	17.0	73.5 °	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	57.7	81.0	71.0
	58cm	700c	55.3	73.0 °	19.0	73.8 °	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	59.6	83.0	73.0
	60cm	700c	57.3	72.8 °	21.0	73.9 °	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	61.5	85.0	75.0
	62cm	700c	59.3	72.5 °	23.0	73.9 °	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.4	87.0	77.0
	64cm	700c	61.3	72.3 °	25.0	74.0 °	61.0	6.8	41.3	4.0	5.5	101.8	84.1	40.1	65.4	90.0	80.0

H2 Fit 1 Series	47cm	700c	44.4	74.6 °	12.0	71.2 °	51.3	7.2	40.7	4.5	6.8	97.1	71.1	36.9	52.2	69.5	59.5
	50cm	700c	47.6	74.6 °	13.0	72.1 °	52.1	7.2	40.7	4.5	6.2	97.1	73.3	37.4	53.5	72.5	62.5
	52cm	700c	49.3	74.2 °	14.0	72.8 °	53.4	7.2	40.7	4.5	5.8	97.3	74.7	37.9	54.7	75.5	65.5
	54cm	700c	50.6	73.7 °	15.0	73.0 °	54.3	7.0	40.7	4.5	5.6	97.8	75.8	38.1	55.5	78.0	68.0
	56cm	700c	53.3	73.3 °	17.0	73.5 °	56.0	7.0	40.7	4.0	5.8	98.0	78.1	38.7	57.7	81.0	71.0
	58cm	700c	55.3	73.0 °	19.0	73.8 °	57.4	7.0	40.7	4.0	5.7	98.7	80.0	39.1	59.8	83.0	73.0
	60cm	700c	57.3	72.8 °	21.0	73.9 °	58.6	6.8	41.0	4.0	5.6	100.0	81.9	39.5	61.5	85.0	75.0
	62cm	700c	59.3	72.5 °	23.0	73.9 °	59.8	6.8	41.0	4.0	5.6	100.8	83.7	39.8	63.4	87.0	77.0
	64cm	700c	61.3	72.3 °	25.0	74.0 °	61.0	6.8	41.0	4.0	5.5	101.5	85.6	40.1	65.4	90.0	80.0
Domane	44cm	700c	39.0	74.6 °	9.5	70.3 °	50.1	8.0	42.0	5.3	6.6	98.3	65.7	36.0	51.0	65.5	55.5
	47cm	700c	42.0	74.6 °	11.0	71.0 °	50.9	8.0	42.0	5.3	6.1	98.6	68.6	36.4	52.7	69.5	59.5
	50cm	700c	45.0	74.6 °	13.0	71.1 °	51.9	8.0	42.0	5.3	6.0	99.6	71.6	36.8	54.6	72.5	62.5
	52cm	700c	47.5	74.2 °	14.5	71.3 °	53.0	8.0	42.0	5.3	5.9	100.3	73.5	37.1	56.1	75.5	65.5
	54cm	700c	50.0	73.7 °	16.0	71.3 °	54.2	8.0	42.0	5.3	5.9	101.0	75.4	37.4	57.5	78.0	68.0
	56cm	700c	52.5	73.3 °	17.5	71.9 °	55.4	7.8	42.0	4.8	6.1	100.8	77.6	37.7	59.1	81.0	71.0
	58cm	700c	54.8	73.0 °	19.5	72.0 °	56.7	7.8	42.5	4.8	6.0	102.2	79.6	38.0	61.1	83.0	73.0
	60cm	700c	56.7	72.8 °	22.0	72.1 °	57.9	7.5	42.5	4.8	5.9	103.2	81.7	38.3	63.2	85.0	75.0
	62cm	700c	58.6	72.5 °	24.5	72.1 °	59.3	7.5	42.5	4.8	5.9	104.2	83.5	38.6	65.6	87.0	77.0
Silque Women's Lexa SLX Women's	44cm	700c	39.8	74.6 °	11.0	70.3 °	50.0	7.2	41.0	5.0	6.8	97.3	68.6	36.0	50.8	65.5	55.5
	47cm	700c	41.6	74.6 °	12.5	71.1 °	50.9	7.2	41.0	5.0	6.3	97.6	70.2	36.4	52.5	69.5	59.5
	50cm	700c	43.7	74.6 °	14.5	71.3 °	51.8	7.2	41.0	5.0	6.2	98.4	72.7	36.8	54.5	72.5	62.5
	52cm	700c	46.5	74.2 °	15.8	72.0 °	53.0	7.2	41.0	4.7	6.0	98.3	74.9	37.1	56.0	75.5	65.5
	54cm	700c	49.0	73.7 °	17.5	72.1 °	54.2	7.0	41.0	4.7	6.0	99.1	77.0	37.4	57.5	78.0	68.0
	56cm	700c	52.1	73.3 °	19.3	72.2 °	55.5	7.0	41.0	4.7	5.9	99.8	79.3	37.7	59.2	81.0	71.0
Lexa SL Women's Lexa S Women's Lexa Women's	44cm	700c	39.8	74.6 °	10.5	70.3 °	50.0	7.2	41.0	5.0	6.8	97.4	68.0	36.0	51.0		
	47cm	700c	41.6	74.6 °	11.5	71.1 °	50.9	7.2	41.0	5.0	6.3	97.6	69.5	36.4	52.5		
	50cm	700c	43.7	74.6 °	13.8	71.3 °	51.8	7.2	41.0	5.0	6.2	98.4	71.3	36.8	54.5		
	52cm	700c	46.5	74.2 °	15.0	72.2 °	53.0	7.2	41.0	4.5	6.1	97.9	73.3	37.1	56.1		
	54cm	700c	49.0	73.7 °	16.8	72.3 °	54.2	7.0	41.0	4.5	6.1	98.7	75.4	37.4	57.6		
	56cm	700c	52.1	73.3 °	18.5	72.4 °	55.5	7.0	41.0	4.5	6.0	99.4	77.8	37.7	59.3		
Speed Concept	XS	650c	47.8	78.0 °	9.0	72.0 °	46.9	5.5	37.4	4.0	6.0	91.6	72.6	37.0	46.8	76.6	56.4
	S	700c	50.3	78.0 °	6.5	72.2 °	49.5	8.0	40.0	4.5	6.1	96.1	75.0	39.0	49.2	79.1	58.9
	M	700c	52.9	78.0 °	9.0	72.5 °	51.8	8.0	40.0	4.5	6.0	98.5	77.5	40.8	51.7	81.7	61.5
	L	700c	55.3	78.0 °	11.5	72.5 °	54.1	8.0	40.0	4.5	6.0	101.0	79.9	42.6	54.1	84.1	63.9
	XL	700c	57.8	78.0 °	14.0	72.5 °	56.5	8.0	40.0	4.5	6.0	103.7	82.3	44.5	56.5	86.6	66.4

TREK CYCLOCROSS 2016

Boone	50cm	700c	47.6	75.0 °	11.0	71.0 °	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4	72.5	62.5
	52cm	700c	49.3	74.5 °	12.3	71.5 °	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7	75.5	65.5
	54cm	700c	51.3	74.0 °	13.8	72.0 °	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2	78.0	68.0
	56cm	700c	53.3	73.6 °	15.7	72.0 °	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0	81.0	71.0
	58cm	700c	55.3	73.3 °	17.6	72.3 °	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7	83.0	73.0
	61cm	700c	58.3	73.0 °	20.5	72.3 °	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4	86.0	76.0
Crockett	50cm	700c	47.6	75.0 °	11.0	71.0 °	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4		
	52cm	700c	49.3	74.5 °	12.3	71.5 °	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7		
	54cm	700c	51.3	74.0 °	13.8	72.0 °	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2		
	56cm	700c	53.3	73.6 °	15.7	72.0 °	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0		
	58cm	700c	55.3	73.3 °	17.6	72.3 °	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7		
	61cm	700c	58.3	73.0 °	20.5	72.3 °	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4		

TREK CITY 2016

Models	Frame Size Number												
		Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover
7.9 FX	50cm	700c	45.0	74.6 °	13.0	71.1 °	51.9		42.0	5.3	6.0	99.6	71.6
7.7 FX	52cm	700c	47.5	74.2 °	14.5	71.3 °	53.0		42.0	5.3	5.9	100.3	73.5
	54cm	700c	50.0	73.7 °	16.0	71.3 °	54.2		42.0	5.3	5.9	101.0	75.4
	56cm	700c	52.5	73.3 °	17.5	71.9 °	55.4		42.0	4.8	6.1	100.8	77.6
	58cm	700c	54.8	73.0 °	19.5	72.0 °	56.7		42.5	4.8	6.0	102.2	79.6
	60cm	700c	56.7	72.8 °	22.0	72.1 °	57.9		42.5	4.8	5.9	103.2	81.7
7.5 FX	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.0	105.7	69.3
7.4 FX	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	73.5
7.3 FX	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.8	78.3
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.2	106.4	83.1
	25"	700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5	44.5	4.5	6.2	106.5	87.7
7.5 FX WSD	13"	700c	33.0	75.0 °	11.5	70.0 °	53.0	28.5	44.5	5.0	7.3	105.3	66.6
7.4 FX WSD	15"	700c	38.1	75.0 °	13.0	70.5 °	53.3	28.5	44.5	5.0	7.0	105.3	69.7
7.3 FX WSD	17"	700c	43.2	74.5 °	15.0	70.5 °	53.9	28.5	44.5	5.0	7.0	105.5	73.2
7.2 FX WSD	19"	700c	48.3	74.0 °	16.0	70.5 °	55.3	28.5	44.5	5.0	7.0	106.4	76.7
	15" Stagger	700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.0	105.6	62.4
	17.5" Stagger	700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	63.0
	20" Stagger	700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.3
7.2 FX	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.1	105.6	69.7
7.1 FX	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.6	73.8
7.0 FX	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	78.6
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.3	106.3	83.4
	25"	700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5	44.5	4.5	6.3	106.4	88.0
	15" Stagger	700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.1	105.6	62.7
	17.5" Stagger	700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.7	63.2
	20" Stagger	700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.6
	22.5" Stagger	700c	57.2	73.0 °	19.0	72.5 °	58.5	28.5	44.5	4.5	6.3	106.3	64.0
DS Series	15.5"	700c	36.6	74.5 °	11.4	70.0 °	57.5	29.4	45.5	3.8	8.5	109.1	73.8
	17.5"	700c	41.7	74.0 °	12.4	71.0 °	59.0	29.4	45.5	3.8	8.2	109.5	76.1
	19"	700c	46.7	73.5 °	13.4	71.0 °	60.5	29.4	45.5	3.8	8.2	110.5	79.1
	21"	700c	50.5	73.0 °	14.4	71.5 °	62.0	29.4	45.5	3.8	7.8	111.0	81.5
	22.5"	700c	54.3	72.5 °	15.4	72.0 °	63.5	29.4	45.5	3.8	7.5	111.2	84.1
Neko	14"	700c	33.8	74.5 °	11.4	70.0 °	55.0	29.4	45.5	3.8	8.9	107.0	69.4
	16"	700c	38.2	74.0 °	11.4	70.5 °	56.0	29.4	45.5	3.8	8.5	107.0	71.6
	18"	700c	43.3	73.5 °	12.4	71.0 °	57.5	29.4	45.5	3.8	8.2	107.5	74.5
	14"	700c	35.6	74.5 °	13.4	70.0 °	55.0	29.4	45.5	3.8	8.9	107.0	62.2
	16"	700c	38.2	74.0 °	13.4	70.5 °	56.0	29.4	45.5	3.8	8.5	107.0	62.2
	18"	700c	43.3	73.5 °	14.4	71.0 °	57.5	29.4	45.5	3.8	8.2	107.6	62.2
Chelsea	49cm	700c	49.0	74.6 °	11.4	70.7 °	53.3	27.7	43.5	4.5	7.5	102.5	64.6
	53cm	700c	53.0	73.8 °	13.3	71.2 °	55.3	27.7	43.5	4.5	7.2	103.3	64.3
	56cm	700c	56.0	73.0 °	15.5	72.0 °	57.3	27.7	43.5	4.5	6.7	103.5	64.3
District 8	50cm	700c	50.0	74.5 °	11.8	71.0 °	53.7	27.7	43.8	4.5	7.5	103	75.8
Steel District	54cm	700c	54.0	73.5 °	13.8	71.5 °	56.0	27.7	43.8	4.5	7.0	103.4	79.3
	57cm	700c	57	73.0 °	16.2	72.0 °	57.7	28.1	43.8	4.5	6.7	104.5	82.4
	61cm	700c	61.0	72.5 °	18.8	72.5 °	59.8	28.1	43.8	4.5	6.4	105.3	86.2
Lync	15"	700c	38.1	74.5 °	12.5	70.5 °	54.7	28.4	44.5	4.5	7.6	105.5	70.0
	17.5"	700c	44.4	74.0 °	14.0	70.5 °	54.8	28.4	44.5	4.5	7.6	105.2	74.1
	20"	700c	50.8	73.5 °	16.0	71.5 °	56.5	28.4	44.5	4.5	6.9	105.3	78.5
	22.5"	700c	57.2	73.0 °	18.0	72.5 °	58.1	28.4	44.5	4.5	6.3	105.4	81.6
	25"	700c	63.5	72.0 °	20.0	72.5 °	59.2	28.4	44.5	4.5	6.3	105.3	85.9

CrossRip	49cm	700c	50.0	74.5 °	10.5	70.6 °	52.5	27.7	43.5	4.5	7.6	101.5	73.1
	52cm	700c	52.0	74.0 °	12.8	71.2 °	54.8	27.7	43.5	4.5	7.2	102.9	75.3
	54cm	700c	54.0	73.5 °	15.0	71.5 °	56.9	27.7	43.5	4.5	7.0	104.2	76.7
	56cm	700c	56.0	73.0 °	16.7	72.0 °	58.4	28.1	43.5	4.5	6.7	105.0	78.7
	58cm	700c	58.0	73.0 °	18.0	72.5 °	59.3	28.1	43.5	4.5	6.4	105.3	80.1
	61cm	700c	61.0	72.5 °	20.0	72.5 °	60.9	28.1	43.5	4.5	6.4	106.3	82.6
Allant	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.1	105.6	69.7
	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.6	73.8
	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	78.6
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.3	106.3	83.4
920	49cm	29"	44.0	74.5 °	9.5	70.0 °	54.0	28.3	46.5	5.5	7.5	107.2	72.2
	52cm	29"	47.0	74.0 °	10.5	70.5 °	55.1	28.3	46.5	5.5	7.2	107.4	74.3
	54cm	29"	49.0	73.8 °	12.0	71.0 °	56.2	28.3	46.5	5.5	6.8	107.9	76.0
	56cm	29"	51.0	73.3 °	14.5	71.3 °	57.8	28.3	46.5	5.5	6.7	108.8	77.8
	58cm	29"	59.4	73.0 °	16.5	71.3 °	59.4	28.3	46.5	5.5	6.7	110.0	79.6
	61cm	29"	60.4	72.8 °	18.0	71.5 °	60.4	28.3	46.5	5.5	6.5	110.7	81.7
720	49cm	700c	46.6	74.2 °	9.6	70.8 °	52.6	27.4	42.6	4.5	7.4	100.2	73.3
	52cm	700c	48.6	74.0 °	11.0	71.4 °	53.8	27.4	42.6	4.5	7.0	100.7	75.0
	54cm	700c	50.6	73.7 °	12.8	71.8 °	55.0	27.6	42.6	4.5	6.7	101.4	77.0
	56cm	700c	52.6	73.5 °	14.5	72.2 °	56.3	27.6	42.6	4.5	6.5	102.1	78.6
	58cm	700c	54.6	73.3 °	16.4	72.5 °	57.5	27.8	42.6	4.5	6.3	102.9	80.5
	61cm	700c	56.6	73.0 °	19.0	72.8 °	59.3	27.8	42.6	4.5	6.0	104.1	82.5
520 Disc 520	48cm	700c	44.0	74.3 °	11.5	69.5 °	52.0	27.4	45.0	5.2	7.4	104.1	71.3
	51cm	700c	48.2	74.0 °	12.5	70.0 °	53.1	27.4	45.0	5.2	7.1	104.5	74.1
	54cm	700c	51.2	73.8 °	14.0	71.0 °	54.3	27.8	45.0	5.2	6.5	104.8	76.8
	57cm	700c	54.3	73.5 °	16.0	71.8 °	55.7	27.8	45.0	5.2	5.9	105.2	79.4
	60cm	700c	57.5	73.0 °	20.0	71.8 °	58.3	27.8	45.0	5.2	5.9	107.4	82.6
	63cm	700c	60.5	72.8 °	23.0	72.3 °	60.3	27.8	45.0	5.2	5.6	108.6	85.4
Conduit+	15"	700c	38.1	74.5 °	13.2	70.5 °	54.7	28.9	46.5	4.5	7.8	107.5	709.1
	17.5"	700c	44.4	74.0 °	14.7	70.5 °	54.8	28.9	46.5	4.5	7.8	107.2	748.7
	20"	700c	50.8	73.5 °	16.7	71.5 °	56.4	28.9	46.5	4.5	7.1	107.3	791.4
	22.5"	700c	57.1	73.0 °	18.7	72.5 °	58.1	28.9	46.5	4.5	6.5	107.4	835.5
XM700+	50cm	700c		73.0 °		70.5 °	57.6	29.9	47.5	4.5	7.9	110.3	
	55cm	700c		73.0 °		71.0 °	59.2	29.9	47.5	4.5	7.6	111.5	
	60cm	700c		73.0 °		71.5 °	61.5	29.9	47.5	4.5	7.3	113.3	
	45cm	700c		73.5 °		70.0 °	56.1	29.9	47.5	4.5	8.3	109.8	
	50cm	700c		73.0 °		70.5 °	57.6	29.9	47.5	4.5	7.9	110.3	
Lift+	55cm	700c		73.0 °		71.0 °	59.2	29.9	47.5	4.5	7.6	111.5	
	S	26"	42.0	65.5 °	21.0	69.5 °	61.2	28.6	49.5	5.0	7.3	109.0	69.5
	M	26"	45.7	65.5 °	21.0	69.5 °	62.0	28.6	49.5	5.0	7.3	109.8	71.7
	L	26"	53.3	65.5 °	26.0	69.5 °	65.0	28.6	49.5	5.0	7.3	112.3	78.0
	S Lowstep	26"	34.3	65.5 °	20.0	69.5 °	59.2	28.6	49.5	5.0	7.3	107.1	64.4
Shift	M Lowstep	26"	42.0	65.5 °	21.0	69.5 °	61.2	28.6	49.5	5.0	7.3	109.0	69.1
	14.5"	26"		65.5 °	13.7	69.0 °	59.4	28.2	49.5	5.0	7.4	108.0	67.0
	16.5"	26"		65.5 °	17.2	69.0 °	61.1	28.2	49.5	5.0	7.4	109.5	70.6
	18.5"	26"		65.5 °	17.2	69.0 °	62.0	28.2	49.5	5.0	7.4	110.3	72.7
	21"	26"		65.5 °	22.2	69.0 °	64.9	28.2	49.5	5.0	7.4	113.0	76.8
Shift WSD	13.5"	26"		65.5 °	16.2	69.0 °	59.1	28.2	49.5	5.0	7.4	107.5	50.3
	16.5"	26"		65.5 °	17.2	69.0 °	61.1	28.2		5.0	7.4	109.5	50.3
	19"	26"		65.5 °	19.7	69.0 °	63.3	28.2	49.5	5.0	7.4	111.5	50.3
Verve	15"	700c		73.0 °	10.0	70.5 °	57.2	28.5	46.5	5.1	7.0	109.0	71.5
	17.5"	700c		72.5 °	11.5	70.5 °	57.8	28.5	46.5	5.1	7.0	109.2	75.3
	20"	700c		72.0 °	12.5	70.5 °	59.4	28.5	46.5	5.1	7.0	110.3	78.9
	22.5"	700c		71.5 °	15.5	71.0 °	61.3	28.5	46.5	5.1	6.6	111.1	83.5
	25"	700c		71.5 °	20.5	71.0 °	62.0	28.5	46.5	5.1	6.6	111.8	89.0
Verve WSD	13"	700c		73.0 °	17.0	70.5 °	56.0	28.5	46.5	5.1	6.9	108.3	44.8
	16"	700c		72.5 °	18.0	70.5 °	57.5	28.5	46.5	5.1	7.0	109.2	44.8
	19"	700c		72.0 °	18.0	70.5 °	60.0	28.5	46.5	5.1	7.0	111.0	44.8
T900	18.5" Front	26"		72.5 °	19.5	73.0 °	57.7	28.7	43.5	5.5	4.4	177.1	76.1
	14.5" Rear	26"		72.5 °			22.7	28.6					55.9