




GEOMETRY GLOSSARY /

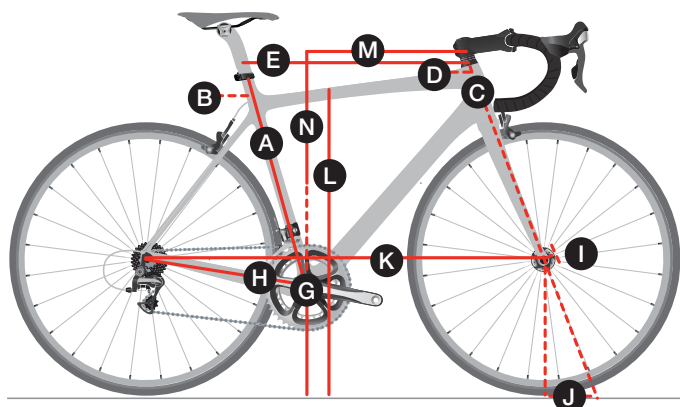

ROAD BIKES /

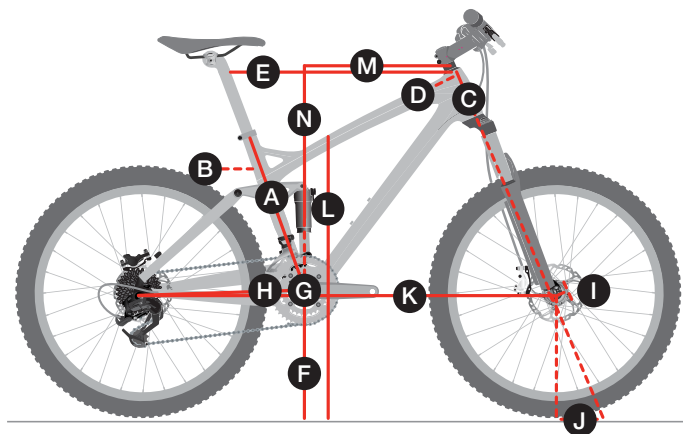

MOUNTAIN BIKES /

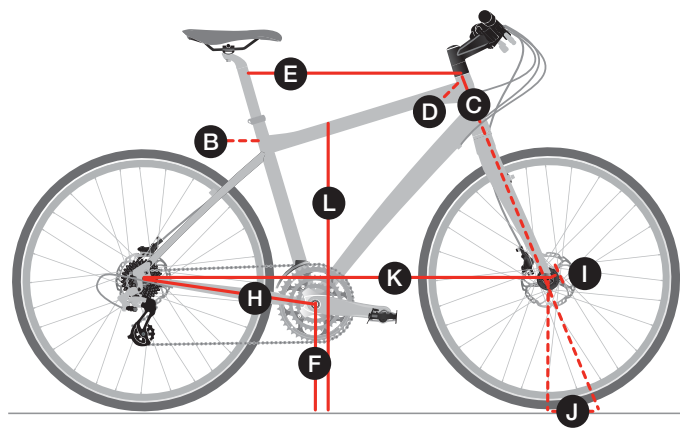


CITY BIKES /

A	Seat tube	The distance from the centre of the bottom bracket to the top of the seat tube.
B	Seat tube angle	The angle of seat tube to the ground. Tailored to optimise power transmission on each frame size.
C	Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.
D	Head angle	The angle of head tube to the ground. Tailored to optimise steering precision on each frame size.
E	Effective top tube	The horizontal measure from the centre of the headset to the centre of the seatpost. The most important measurement when buying a bike, because it cannot be changed.
F	Bottom bracket height	The vertical distance from the centre of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.
G	Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's centre of gravity.
H	Chainstay length	The distance from the centre of the bottom bracket to the centre of the rear axle.
I	Offset	The perpendicular distance from the steering axis to the centre of the front wheel.
J	Trail	The distance the front wheel's contact patch lags behind the steering axis.
K	Wheelbase	The distance between the axles. Tailored to optimise weight distribution on each frame size.
L	Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 21cm in front of seat tube.
M	Frame reach	The horizontal distance from the bottom bracket centre to the top of the head tube centreline.
N	Frame stack	The vertical distance from the bottom bracket center to the top of the head tube centreline.

Notes

All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tyres as well as different fork lengths will change the dimensions in these charts.

ROAD GEOMETRY /



Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height minimum	Seat height maximum
Domane Race Shop Limited Pro Endurance	54cm	700c	50.1	73.7°	10.3	72.6°	55.0	8.0	42.0	5.3	5.2	100.4	73.2	39.6	52.6	68.0	78.0
	56cm	700c	52.5	73.3°	12.0	72.8°	56.2	7.8	42.0	5.3	5.1	101.2	75.2	40.0	54.0	71.0	81.0
	58cm	700c	55.3	73.0°	14.3	72.8°	57.6	7.8	42.5	5.3	5.1	102.9	77.8	40.5	56.2	73.0	83.0
	60cm	700c	57.3	72.8°	16.6	72.8°	58.9	7.5	42.5	5.3	5.1	104.0	79.9	40.9	58.2	75.0	85.0
Domane Endurance	62cm	700c	59.3	72.5°	18.6	72.8°	60.2	7.5	42.5	5.3	5.1	105.0	81.7	41.3	60.1	77.0	87.0
	44cm	700c	39.0	74.6°	9.5	70.3°	50.1	8.0	42.0	5.3	6.6	98.3	65.7	36.0	51.0	55.5	65.5
	47cm	700c	42.0	74.6°	11.0	71.0°	50.9	8.0	42.0	5.3	6.1	98.6	68.6	36.4	52.7	59.5	69.5
	50cm	700c	45.0	74.6°	13.0	71.1°	51.9	8.0	42.0	5.3	6.0	99.6	71.6	36.8	54.6	62.5	72.5
	52cm	700c	47.5	74.2°	14.5	71.3°	53.0	8.0	42.0	5.3	5.9	100.3	73.5	37.1	56.1	65.5	75.5
	54cm	700c	50.0	73.7°	16.0	71.3°	54.2	8.0	42.0	5.3	5.9	101.0	75.4	37.4	57.5	68.0	78.0
	56cm	700c	52.5	73.3°	17.5	71.9°	55.4	7.8	42.0	4.8	6.1	100.8	77.6	37.7	59.1	71.0	81.0
	58cm	700c	54.8	73.0°	19.5	72.0°	56.7	7.8	42.5	4.8	6.0	102.2	79.6	38.0	61.1	73.0	83.0
	60cm	700c	56.7	72.8°	22.0	72.1°	57.9	7.5	42.5	4.8	5.9	103.2	81.7	38.3	63.2	75.0	85.0
	62cm	700c	58.6	72.5°	24.5	72.1°	59.3	7.5	42.5	4.8	5.9	104.2	83.5	38.6	65.6	77.0	87.0
Silque	44cm	700c	39.8	74.6°	11.0	70.3°	50.0	7.2	41.0	5.0	6.8	97.3	68.6	36.0	50.8	55.5	65.5
	47cm	700c	41.6	74.6°	12.5	71.1°	50.9	7.2	41.0	5.0	6.3	97.6	70.2	36.4	52.5	59.5	69.5
	50cm	700c	43.7	74.6°	14.5	71.3°	51.8	7.2	41.0	5.0	6.2	98.4	72.7	36.8	54.5	62.5	72.5
	52cm	700c	46.5	74.2°	15.8	72.0°	53.0	7.2	41.0	4.7	6.0	98.3	74.9	37.1	56.0	65.5	75.5
	54cm	700c	49.0	73.7°	17.5	72.1°	54.2	7.0	41.0	4.7	6.0	99.1	77.0	37.4	57.5	68.0	78.0
	56cm	700c	52.1	73.3°	19.3	72.2°	55.5	7.0	41.0	4.7	5.9	99.8	79.3	37.7	59.2	71.0	81.0
Lexa	44cm	700c	39.8	74.6°	10.5	70.3°	50.0	7.2	41.0	5.0	6.8	97.4	68.0	36.0	51.0		
	47cm	700c	41.6	74.6°	11.5	71.1°	50.9	7.2	41.0	5.0	6.3	97.6	69.5	36.4	52.5		
	50cm	700c	43.7	74.6°	13.8	71.3°	51.8	7.2	41.0	5.0	6.2	98.4	71.3	36.8	54.5		
	52cm	700c	46.5	74.2°	15.0	72.2°	53.0	7.2	41.0	4.5	6.1	97.9	73.3	37.1	56.1		
	54cm	700c	49.0	73.7°	16.8	72.3°	54.2	7.0	41.0	4.5	6.1	98.7	75.4	37.4	57.6		
	56cm	700c	52.1	73.3°	18.5	72.4°	55.5	7.0	41.0	4.5	6.0	99.4	77.8	37.7	59.3		
Émonda Race Shop Limited H1 Fit	50cm	700c	45.3	74.6°	10.0	72.1°	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	50.6	62.5	72.5
	52cm	700c	48.2	74.2°	11.0	72.8°	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	51.8	65.5	75.5
	54cm	700c	49.6	73.7°	12.0	73.0°	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	52.6	68.0	78.0
	56cm	700c	52.5	73.3°	14.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	54.9	71.0	81.0
	58cm	700c	55.3	73.0°	16.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	56.7	73.0	83.0
	60cm	700c	57.3	72.8°	18.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	58.6	75.0	85.0
Émonda H2 Fit	62cm	700c	59.3	72.5°	20.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	60.6	77.0	87.0
	44cm	700c	40.8	74.6°	10.0	70.4°	49.9	7.2	41.0	5.0	6.8	97.1	68.2	36.2	49.9	55.5	65.5
	47cm	700c	44.4	74.6°	11.5	71.2°	51.3	7.2	41.0	4.5	6.7	97.4	69.8	36.9	52.2	59.5	69.5
	50cm	700c	47.6	74.6°	13.0	72.1°	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	53.5	62.5	72.5
	52cm	700c	49.3	74.2°	14.0	72.8°	53.4	7.2	41.0	4.5	5.7	97.7	72.9	37.9	54.7	65.5	75.5
	54cm	700c	50.6	73.7°	15.5	73.0°	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	55.5	68.0	78.0
	56cm	700c	53.3	73.3°	17.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	57.7	71.0	81.0
	58cm	700c	55.3	73.0°	19.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	59.6	73.0	83.0
	60cm	700c	57.3	72.8°	21.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	61.5	75.0	85.0
	62cm	700c	59.3	72.5°	23.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.4	77.0	87.0
Madone Race Shop Limited H1 Fit	64cm	700c	61.3	72.3°	25.0	74.0°	61.0	6.8	41.3	4.0	5.5	101.8	84.1	40.1	65.4	80.0	90.0
	50cm	700c	45.3	74.6°	10.0	72.1°	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	51.1	62.9	72.4
	52cm	700c	48.2	74.2°	11.0	72.8°	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	52.3	66.0	75.4
	54cm	700c	49.6	73.7°	12.0	73.0°	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	53.1	68.4	77.9
	56cm	700c	52.5	73.3°	14.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	55.4	71.4	80.9
	58cm	700c	55.3	73.0°	16.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	57.2	73.4	82.9
Madone H2 Fit	60cm	700c	57.3	72.8°	18.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	59.1	75.4	84.9
	62cm	700c	59.3	72.5°	20.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	61.1	77.4	86.8
	50cm	700c	47.6	74.6°	13.0	72.1°	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	54.0	62.9	72.4
	52cm	700c	49.3	74.2°	14.0	72.8°	53.2	7.2	41.0	4.5	5.7	97.7	72.9	37.9	55.2	66.0	75.4
	54cm	700c	50.6	73.7°	15.5	73.0°	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	56.0	68.4	77.9
	56cm	700c	53.3	73.3°	17.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	58.2	71.4	80.9
1 Series	58cm	700c	55.3	73.0°	19.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	60.1	73.4	82.9
	60cm	700c	57.3	72.8°	21.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	62.0	75.4	84.9
	62cm	700c	59.3	72.5°	23.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.9	77.4	86.8
	47cm	700c	44.4	74.6°	12.0	71.2°	51.3	7.2	40.7	4.5	6.8	97.1	71.1	36.9	52.2	59.5	69.5
	50cm	700c	47.6	74.6°	13.0	72.1°	52.1	7.2	40.7	4.5	6.2	97.1	73.3	37.4	53.5	62.5	72.5
	52cm	700c	49.3	74.2°	14.0	72.8°	53.4	7.2	40.7	4.5	5.8	97.3	74.7	37.9	54.7	65.5	75.5
	54cm	700c	50.6	73.7°	15.0	73.0°	54.3	7.0	40.7	4.5	5.6	97.8	75.8	38.1	55.5	68.0	78.0
	56cm	700c	53.3	73.3°	17.0	73.5°	56.0	7.0	40.7	4.0	5.8	98.0	78.1	38.7	57.7	71.0	81.0
	58cm	700c	55.3	73.0°	19.0	73.8°	57.4	7.0	40.7	4.0	5.7	98.7	80.0	39.1	59.8	73.0	83.0
	60cm	700c	57.3	72.8°	21.0	73.9°	58.6	6.8	41.0	4.0	5.6	100.0	81.9	39.5	61.5	75.0	85.0
	62cm	700c	59.3	72.5°	23.0	73.9°	59.8	6.8	41.0	4.0	5.6	100.8	83.7	39.8	63.4	77.0	87.0
	64cm	700c	61.3	72.3°	25.0	74.0°	61.0	6.8	41.0	4.0	5.5	101.5	85.6	40.1	65.4	80.0	90.0

All dimensions are in centimetres unless otherwise stated.


Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

ROAD GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height minimum	Seat height maximum
Speed Concept	XS	650c	47.8	78.0 °	9.0	72.0 °	46.9	5.5	37.4	4.0	6.0	91.0	72.6	37.0	46.8	56.4	76.6
	S	700c	50.3	78.0 °	6.5	72.2 °	49.5	8.0	40.0	4.5	6.1	96.1	75.0	39.0	49.2	58.9	79.1
	M	700c	52.9	78.0 °	9.0	72.5 °	51.8	8.0	40.0	4.5	6.0	98.5	77.5	40.8	51.7	61.5	81.7
	L	700c	57.8	78.0 °	14.0	72.5 °	56.5	8.0	40.0	4.5	6.0	103.7	82.3	44.5	56.5	66.4	86.6
	XL	700c	57.8	78.0 °	14.0	72.5 °	56.5	8.0	40.0	4.5	6.0	103.7	82.3	44.5	56.5	66.4	86.6
Boone	50cm	700c	47.6	75.0 °	11.0	71.0 °	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4	62.5	72.5
	52cm	700c	49.3	74.5 °	12.3	71.5 °	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7	65.5	75.5
	54cm	700c	51.3	74.0 °	13.8	72.0 °	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2	68.0	78.0
	56cm	700c	53.3	73.6 °	15.7	72.0 °	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0	71.0	81.0
	58cm	700c	55.3	73.3 °	17.6	72.3 °	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7	73.0	83.0
	61cm	700c	58.3	73.0 °	20.5	72.3 °	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4	76.0	86.0
Crockett	50cm	700c	47.6	75.0 °	11.0	71.0 °	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4		
	52cm	700c	49.3	74.5 °	12.3	71.5 °	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7		
	54cm	700c	51.3	74.0 °	13.8	72.0 °	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2		
	56cm	700c	53.3	73.6 °	15.7	72.0 °	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0		
	58cm	700c	55.3	73.3 °	17.6	72.3 °	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7		
	61cm	700c	58.3	73.0 °	20.5	72.3 °	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4		
920	49cm	29in	44.0	74.5 °	9.5	70.0 °	54.0	8.5	46.5	5.5	7.5	107.2	72.2	38.5	55.6		
	52cm	29in	47.0	74.0 °	10.5	70.5 °	55.1	8.5	46.5	5.5	7.2	107.4	74.3	38.8	56.7		
	54cm	29in	49.0	73.8 °	12.0	71.0 °	56.2	8.5	46.5	5.5	6.8	107.9	76.0	39.2	58.3		
	56cm	29in	51.0	73.3 °	14.5	71.3 °	57.8	8.5	46.5	5.5	6.7	108.8	77.8	39.5	60.8		
	58cm	29in	53.0	73.0 °	16.5	71.3 °	59.4	8.5	46.5	5.5	6.7	110.0	79.6	40.2	62.7		
	61cm	29in	56.0	72.8 °	18.0	71.5 °	60.4	8.5	46.5	5.5	6.5	110.7	81.7	40.5	64.2		
520	48cm	700c	44.0	74.3 °	11.5	69.5 °	52.0	7.5	45.0	5.2	7.4	104.1	71.3	36.8	54.0		
	51cm	700c	48.2	74.0 °	12.5	70.0 °	53.1	7.5	45.0	5.2	7.1	104.5	74.1	37.3	55.1		
	54cm	700c	51.2	73.8 °	14.0	71.0 °	54.3	7.0	45.0	5.2	6.5	104.8	76.8	37.8	56.5		
	57cm	700c	54.3	73.5 °	16.0	71.8 °	55.7	7.0	45.0	5.2	5.9	105.2	79.4	38.3	58.7		
	60cm	700c	57.5	73.0 °	20.0	71.8 °	58.3	7.0	45.0	5.2	5.9	107.4	82.6	39.2	62.5		
	63cm	700c	60.5	72.8 °	23.0	72.3 °	60.3	7.0	45.0	5.2	5.6	108.6	85.4	40.0	65.5		




All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.



Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Top Fuel Low geometry**	15.5"	27.5in	39.4	69.5°	10.0	69.9°	55.8	33.0	2.5	42.7	4.7	8.0	106.4	73.2	39.2	56.1
	17.5"	29in	41.9	68.5°	9.0	70.0°	59.3	33.0	3.9	43.5	5.1	8.0	111.1	72.4	42.7	57.7
	18.5"	29in	44.5	68.5°	9.0	70.0°	60.9	33.0	3.9	43.5	5.1	8.0	112.7	71.9	44.3	57.7
	19.5"	29in	47.0	68.5°	10.0	70.0°	62.5	33.0	3.9	43.5	5.1	8.0	114.4	71.9	45.7	58.7
	21.5"	29in	49.5	68.5°	12.0	70.0°	64.6	33.0	3.9	43.5	5.1	8.0	116.6	71.9	47.2	60.6
Top Fuel High geometry**	15.5"	27.5in	39.4	70.5°	10.0	70.9°	55.6	34.1	1.4	42.4	4.7	7.3	106.3	74.1	40.1	55.4
	17.5"	29in	41.9	69.4°	9.0	70.9°	59.3	34.1	2.8	43.2	5.1	7.4	110.9	73.4	43.6	57.0
	18.5"	29in	44.5	69.4°	9.0	70.9°	60.6	34.1	2.8	43.2	5.1	7.4	112.5	72.9	45.2	57.0
	19.5"	29in	47.0	69.4°	10.0	70.9°	62.3	34.1	2.7	43.2	5.1	7.4	114.3	72.9	46.6	58.0
	21.5"	29in	49.5	69.4°	12.0	70.9°	64.6	34.1	2.7	43.2	5.1	7.4	116.5	72.9	48.1	59.8
Procaliber SL	15.5"	27.5in	39.4	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.3	105.3	72.7	38.2	58.3
	17.5"	29in	41.9	72.5°	9.0	69.5°	59.9	31.1	5.8	43.5	5.1	8.3	109.8	75.0	41.2	59.5
	18.5"	29in	44.5	72.0°	9.0	69.5°	61.7	31.1	5.8	43.5	5.1	8.3	111.3	76.4	42.7	59.5
	19.5"	29in	47.0	72.0°	10.0	69.5°	63.8	31.1	5.8	43.5	5.1	8.3	113.2	77.8	44.2	60.4
	21.5"	29in	52.1	72.0°	12.0	69.5°	65.9	31.1	5.8	43.5	5.1	8.3	115.4	81.6	45.7	62.3
Procaliber	15.5"	27.5in	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	75.3	38.2	56.3
	17.5"	29in	41.9	72.5°	9.0	69.5°	59.9	31.1	5.8	43.5	5.1	8.3	109.8	75.0	41.2	59.5
	18.5"	29in	44.4	72.3°	9.0	69.5°	61.7	31.1	5.8	43.5	5.1	8.3	111.3	76.4	42.7	59.5
	19.5"	29in	47.0	72.0°	10.0	69.5°	63.8	31.1	5.8	43.5	5.1	8.3	113.2	77.8	44.2	60.4
	21.5"	29in	52.1	72.0°	12.0	69.5°	65.9	31.1	5.8	43.5	5.1	8.3	115.4	81.6	45.7	62.3
Superfly	15.5"	27.5in	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29in	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
	18.5"	29in	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	19.5"	29in	47.0	72.0°	10.0	69.6°	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.5	44.3	60.1
	21.5"	29in	52.1	72.0°	12.0	69.6°	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.3	45.7	61.9
Superfly Women's	23"	29in	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.4	47.1	61.9
	13.5"	27.5in	34.3	73.0°	10.0	69.0°	54.1	30.2	4.8	42.5	4.4	8.7	103.7	71.0	37.0	56.3
	15.5"	27.5in	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29in	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
X-Caliber	18.5"	29in	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	13.5"	27.5in	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5in	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29in	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	29in	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29in	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
Cali Women's	21.5"	29in	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	29in	55.9	72.0°	12.0	69.6°	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
	13.5"	27.5in	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5in	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	68.0	38.1	58.5
	17"	29in	40.6	73.0°	10.0	69.0°	59.0	31.2	0.0	44.5	5.1	8.5	111.3	66.9	40.7	59.8
Marlin	18.5"	29in	44.5	73.0°	10.0	69.0°	61.2	31.2	0.0	44.5	5.1	8.5	113.5	68.5	42.9	59.8
	13.5"	27.5in	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5in	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29in	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	29in	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29in	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
Skye SL Women's Skye S Women's	21.5"	29in	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	29in	55.9	72.0°	12.0	69.6°	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
	13.5"	27.5in	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5in	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	68.0	38.1	58.5
Skye Women's 820 Women's	17"	29in	40.6	73.0°	10.0	69.0°	59.0	31.2	0.0	44.5	5.1	8.5	111.3	66.9	40.7	59.8
	18.5"	29in	44.5	73.0°	10.0	69.0°	61.2	31.2	0.0	44.5	5.1	8.5	113.5	68.5	42.9	59.8
	13"	26in	33.0	74.0°	11.0	70.5°	52.4	28.7	0.0	43.0	4.0	7.6	101.9	65.5		
	16"	26in	40.6	73.5°	11.0	70.5°	54.6	29.1	0.0	43.0	4.0	7.6	103.6	63.1		
	19.5"	26in	49.5	73.0°	17.0	70.5°	57.5	29.3	0.0	43.0	4.0	7.6	106.4	62.5		

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**Refers to high or low setting on adjustable-geometry bikes.

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Fuel EX Carbon 29 Low geometry**	15.5	29in	39.4	65.5°	10.0	67.0°	56.6	33.5	3.9	43.3	5.1	10.3	112.2	76.0	39.1	60.9
	17.5	29in	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9
	18.5	29in	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9
	19.5	29in	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9
	21.5	29in	51.0	65.5°	11.0	67.0°	65.7	33.5	3.9	43.3	5.1	10.3	121.5	74.0	48.0	61.8
Fuel EX Carbon 29 High geometry**	15.5	29in	39.4	66.2°	10.0	67.7°	56.5	34.4	3.0	43.2	5.1	9.9	112.1	76.7	39.9	60.4
	17.5	29in	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3
	18.5	29in	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3
	19.5	29in	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3
	21.5	29in	51.0	66.2°	11.0	67.7°	65.7	34.4	3.0	43.2	5.1	9.9	121.4	74.7	48.7	61.2
Fuel EX Aluminium 29 Low geometry**	15.5	29in	39.4	65.5°	10.0	67.0°	56.6	33.5	3.9	43.3	5.1	10.3	112.2	76.0	39.1	60.9
	17.5	29in	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9
	18.5	29in	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9
	19.5	29in	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9
	21.5	29in	51.0	65.5°	11.0	67.0°	65.7	33.5	3.9	43.3	5.1	10.3	121.5	74.0	48.0	61.8
Fuel EX Aluminium 29 High geometry**	15.5	29in	39.4	66.2°	10.0	67.7°	56.5	34.4	3.0	43.2	5.1	9.9	112.1	76.7	39.9	60.4
	17.5	29in	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3
	18.5	29in	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3
	19.5	29in	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3
	21.5	29in	51.0	66.2°	11.0	67.7°	65.7	34.4	3.0	43.2	5.1	9.9	121.4	74.7	48.7	61.2
Fuel EX Carbon 27.5 Plus Low geometry**	15.5	27.5in	39.4	65.1°	10.0	66.6°	56.6	32.9	3.9	43.2	5.1	10.6	112.2	76.0	39.1	61.3
	17.5	27.5in	41.9	65.1°	10.0	66.6°	60.1	32.9	3.9	43.2	5.1	10.6	115.7	74.0	42.6	61.2
	18.5	27.5in	44.0	65.1°	10.0	66.6°	61.8	32.9	3.9	43.2	5.1	10.6	117.4	73.5	44.3	61.2
	19.5	27.5in	47.0	65.1°	10.0	66.6°	63.3	32.9	3.9	43.2	5.1	10.6	118.9	73.0	45.8	61.2
	21.5	27.5in	51.0	65.1°	11.0	66.6°	65.7	32.9	3.9	43.2	5.1	10.6	121.5	74.0	48.0	62.1
Fuel EX Carbon 27.5 Plus High geometry**	15.5	27.5in	39.4	65.7°	10.0	67.2°	56.5	33.9	29.6	43.3	5.1	10.2	112.1	76.7	39.9	60.7
	17.5	27.5in	41.9	65.7°	10.0	67.2°	60.0	33.9	29.6	43.3	5.1	10.2	115.6	74.7	43.3	60.6
	18.5	27.5in	44.0	65.7°	10.0	67.2°	61.7	33.9	29.6	43.3	5.1	10.2	117.3	74.2	45.0	60.6
	19.5	27.5in	47.0	65.7°	10.0	67.2°	63.2	33.9	29.6	43.3	5.1	10.2	118.8	73.7	46.5	60.6
	21.5	27.5in	51.0	65.7°	11.0	67.2°	65.7	33.9	29.6	43.3	5.1	10.2	121.4	74.7	48.7	61.5
Fuel EX Aluminium 27.5 Plus Low geometry**	15.5	27.5in	39.4	65.1°	10.0	66.6°	56.6	32.9	3.9	43.2	5.1	10.6	112.2	76.0	39.1	61.3
	17.5	27.5in	41.9	65.1°	10.0	66.6°	60.1	32.9	3.9	43.2	5.1	10.6	115.7	74.0	42.6	61.2
	18.5	27.5in	44.0	65.1°	10.0	66.6°	61.8	32.9	3.9	43.2	5.1	10.6	117.4	73.5	44.3	61.2
	19.5	27.5in	47.0	65.1°	10.0	66.6°	63.3	32.9	3.9	43.2	5.1	10.6	118.9	73.0	45.8	61.2
	21.5	27.5in	51.0	65.1°	11.0	66.6°	65.7	32.9	3.9	43.2	5.1	10.6	121.5	74.0	48.0	62.1
Fuel EX Aluminium 27.5 Plus High geometry**	15.5	27.5in	39.4	65.7°	10.0	67.2°	56.5	33.9	29.6	43.3	5.1	10.2	112.1	76.7	39.9	60.7
	17.5	27.5in	41.9	65.7°	10.0	67.2°	60.0	33.9	29.6	43.3	5.1	10.2	115.6	74.7	43.3	60.6
	18.5	27.5in	44.0	65.7°	10.0	67.2°	61.7	33.9	29.6	43.3	5.1	10.2	117.3	74.2	45.0	60.6
	19.5	27.5in	47.0	65.7°	10.0	67.2°	63.2	33.9	29.6	43.3	5.1	10.2	118.8	73.7	46.5	60.6
	21.5	27.5in	51.0	65.7°	11.0	67.2°	65.7	33.9	29.6	43.3	5.1	10.2	121.4	74.7	48.7	61.5
Fuel EX Carbon Women's Low geometry**	14	27.5in	35.6	65.8°	9.0	67.0°	54.4	33.0	2.6	43.4	4.3	10.4	108.8	74.9	37.5	57.1
	15.5	27.5in	39.4	65.8°	10.0	67.0°	56.3	33.0	2.6	43.4	4.3	10.4	110.7	75.5	39.1	58.0
	17.5	29in	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9
	18.5	29in	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9
	19.5	29in	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9
Fuel EX Carbon Women's High geometry**	14	27.5in	35.6	66.5°	9.0	67.7°	54.2	33.8	1.2	43.3	4.3	10.4	108.6	75.5	38.2	56.6
	15.5	27.5in	39.4	66.5°	10.0	67.7°	56.1	33.8	1.2	43.3	4.3	10.4	110.6	76.2	39.8	57.5
	17.5	29in	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3
	18.5	29in	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3
	19.5	29in	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3
Fuel EX Aluminium Women's Low geometry**	14	27.5in	35.6	65.8°	9.0	67.0°	54.4	33.0	2.6	43.4	4.3	10.4	108.8	75.0	37.5	57.1
	15.5	27.5in	39.4	65.8°	10.0	67.0°	56.3	33.0	2.6	43.4	4.3	10.4	110.7	76.6	39.1	58.0
	17.5	29in	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9
	18.5	29in	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9
	19.5	29in	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9
Fuel EX Aluminium Women's High geometry**	14	27.5in	35.6	66.5°	9.0	67.7°	54.2	33.8	1.2	43.3	4.3	10.4	108.6	75.7	38.2	56.6
	15.5	27.5in	39.4	66.5°	10.0	67.7°	56.1	33.8	1.2	43.3	4.3	10.4	110.6	77.3	39.8	57.5
	17.5	29in	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3
	18.5	29in	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3
	19.5	29in	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3


All dimensions are in centimetres unless otherwise stated.


Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**Refers to high or low setting on adjustable-geometry bikes.





Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Remedy Carbon Low geometry** 150mm fork	15.5	27.5in	39.4	67.6°	10.0	66.0°	54.9	33.6	2.0	43.5	4.3	11.1	113.2	75.2	39.7	58.8
	17.5	27.5in	41.9	67.6°	10.0	66.0°	57.9	33.6	2.0	43.5	4.3	11.1	116.2	74.5	42.7	58.8
	18.5	27.5in	44.5	67.6°	10.5	66.0°	59.8	33.6	2.0	43.5	4.3	11.1	118.1	74.4	44.4	59.3
	19.5	27.5in	47.0	67.6°	11.0	66.0°	61.4	33.6	2.0	43.5	4.3	11.1	119.7	73.9	45.8	59.7
	21.5	27.5in	52.1	67.6°	12.5	66.0°	64.3	33.6	2.0	43.5	4.3	11.1	122.7	74.5	48.2	61.1
Remedy Carbon High geometry** 150mm fork	15.5	27.5in	39.4	68.2°	10.0	66.6°	54.7	34.3	1.3	43.3	4.3	9.8	113.1	75.8	40.3	58.4
	17.5	27.5in	41.9	68.1°	10.0	66.5°	57.7	34.3	1.3	43.3	4.3	9.9	116.1	75.2	43.3	58.4
	18.5	27.5in	44.5	68.1°	10.5	66.5°	59.6	34.3	1.3	43.3	4.3	9.9	118.0	75.0	44.9	58.8
	19.5	27.5in	47.0	68.1°	11.0	66.5°	61.1	34.3	1.3	43.3	4.3	9.9	119.6	74.6	46.3	59.3
	21.5	27.5in	52.1	68.1°	12.5	66.5°	64.1	34.3	1.3	43.3	4.3	9.9	122.6	75.2	48.7	60.7
Remedy Carbon Low geometry** 160mm fork	15.5	27.5in	39.4	67.1°	10.0	65.5°	55.1	33.9	1.6	43.5	4.3	11.4	113.6	75.6	39.2	59.1
	17.5	27.5in	41.9	67.2°	10.0	65.5°	58.1	33.9	1.6	43.5	4.3	11.4	116.6	75.0	42.2	59.1
	18.5	27.5in	44.5	67.2°	10.5	65.5°	60.0	33.9	1.6	43.5	4.3	11.4	118.5	74.8	43.9	59.6
	19.5	27.5in	47.0	67.2°	11.0	65.5°	61.6	33.9	1.6	43.5	4.3	11.4	120.1	74.3	45.3	60.1
	21.5	27.5in	52.1	67.2°	12.5	65.5°	64.5	33.9	1.6	43.5	4.3	11.4	123.1	74.8	47.7	61.4
Remedy Carbon High geometry** 160mm fork	15.5	27.5in	39.4	67.7°	10.0	65.0°	54.9	34.6	0.9	43.3	4.3	11.1	113.5	76.2	39.8	58.7
	17.5	27.5in	41.9	67.7°	10.0	65.0°	57.9	34.6	0.9	43.3	4.3	11.1	116.5	75.6	42.8	58.7
	18.5	27.5in	44.5	67.7°	10.5	65.0°	59.7	34.6	0.9	43.3	4.3	11.1	118.4	75.4	44.5	59.2
	19.5	27.5in	47.0	67.7°	11.0	65.0°	61.3	34.6	0.9	43.3	4.3	11.1	120.0	75.0	45.9	59.6
	21.5	27.5in	52.1	67.7°	12.5	65.0°	64.3	34.6	0.9	43.3	4.3	11.1	123.0	75.5	48.3	61.0
Remedy Aluminium Low geometry** 150mm fork	15.5	27.5in	39.4	67.6°	10.0	66.0°	54.9	33.6	2.0	43.5	4.3	11.1	113.2	79.5	39.7	58.8
	17.5	27.5in	41.9	67.6°	10.0	66.0°	57.9	33.6	2.0	43.5	4.3	11.1	116.2	77.3	42.7	58.8
	18.5	27.5in	44.5	67.6°	10.5	66.0°	59.8	33.6	2.0	43.5	4.3	11.1	118.1	76.6	44.4	59.3
	19.5	27.5in	47.0	67.6°	11.0	66.0°	61.4	33.6	2.0	43.5	4.3	11.1	119.7	76.0	45.8	59.7
	21.5	27.5in	52.1	67.6°	12.5	66.0°	64.3	33.6	2.0	43.5	4.3	11.1	122.7	77.6	48.2	61.1
Remedy Aluminium High geometry** 150mm fork	15.5	27.5in	39.4	68.2°	10.0	66.6°	54.7	34.3	1.3	43.3	4.3	9.8	113.1	78.9	40.3	58.4
	17.5	27.5in	41.9	68.1°	10.0	66.5°	57.7	34.3	1.3	43.3	4.3	9.9	116.1	76.7	43.3	58.4
	18.5	27.5in	44.5	68.1°	10.5	66.5°	59.6	34.3	1.3	43.3	4.3	9.9	118.0	76.0	44.9	58.8
	19.5	27.5in	47.0	68.1°	11.0	66.5°	61.1	34.3	1.3	43.3	4.3	9.9	119.6	75.4	46.3	59.3
	21.5	27.5in	52.1	68.1°	12.5	66.5°	64.1	34.3	1.3	43.3	4.3	9.9	122.6	77.0	48.7	60.7
Remedy Aluminium Low geometry** 160mm fork	15.5	27.5in	39.4	67.1°	10.0	65.5°	55.1	33.9	1.6	43.5	4.3	11.4	113.6	79.4	39.2	59.1
	17.5	27.5in	41.9	67.2°	10.0	65.5°	58.1	33.9	1.6	43.5	4.3	11.4	116.6	77.2	42.2	59.1
	18.5	27.5in	44.5	67.2°	10.5	65.5°	60.0	33.9	1.6	43.5	4.3	11.4	118.5	76.4	43.9	59.6
	19.5	27.5in	47.0	67.2°	11.0	65.5°	61.6	33.9	1.6	43.5	4.3	11.4	120.1	75.8	45.3	60.1
	21.5	27.5in	52.1	67.2°	12.5	65.5°	64.5	33.9	1.6	43.5	4.3	11.4	123.1	77.3	47.7	61.4
Remedy Aluminium High geometry** 160mm fork	15.5	27.5in	39.4	67.7°	10.0	65.0°	54.9	34.6	0.9	43.3	4.3	11.1	113.5	80.0	39.8	58.7
	17.5	27.5in	41.9	67.7°	10.0	65.0°	57.9	34.6	0.9	43.3	4.3	11.1	116.5	77.8	42.8	58.7
	18.5	27.5in	44.5	67.7°	10.5	65.0°	59.7	34.6	0.9	43.3	4.3	11.1	118.4	77.1	44.5	59.2
	19.5	27.5in	47.0	67.7°	11.0	65.0°	61.3	34.6	0.9	43.3	4.3	11.1	120.0	76.5	45.9	59.6
	21.5	27.5in	52.1	67.7°	12.5	65.0°	64.3	34.6	0.9	43.3	4.3	11.1	123.0	78.0	48.3	61.0
Slash Carbon Low geometry**	15.5	29in	39.4	64.3°	10.0	65.1°	59.0	34.5	2.8	43.4	5.1	11.7	117.2	78.7	41.0	61.2
	17.5	29in	41.9	64.3°	10.0	65.1°	60.5	34.5	2.8	43.4	5.1	11.7	118.7	77.8	43.0	61.2
	19.5	29in	46.8	64.3°	11.0	65.1°	63.5	34.5	2.8	43.4	5.1	11.7	121.9	77.2	44.5	62.8
	21.5	29in	52.2	64.3°	12.5	65.1°	66.1	34.5	2.8	43.4	5.1	11.7	124.8	77.0	47.5	63.5
Slash Carbon High geometry**	15.5	29in	39.4	64.8°	10.0	65.6°	59.0	35.2	2.1	43.3	5.1	11.4	117.1	79.3	41.6	60.8
	17.5	29in	41.9	64.8°	10.0	65.6°	60.5	35.2	2.1	43.3	5.1	11.4	118.6	78.4	43.1	60.8
	19.5	29in	46.8	64.8°	11.0	65.6°	63.5	35.2	2.1	43.3	5.1	11.4	121.9	77.8	45.9	61.8
	21.5	29in	52.2	64.8°	12.5	65.6°	66.1	35.2	2.1	43.3	5.1	11.4	124.7	77.6	48.1	63.1
Stache Carbon	15.5	29in	39.4	68.4°	9.0	68.4°	58.0	32.8	7.2	42.0	5.1	10.4	108.5	77.8	39.3	63.0
	17.5	29in	41.9	68.4°	9.0	68.4°	60.8	32.8	7.2	42.0	5.1	10.4	111.2	79.1	42.2	63.0
	19.5	29in	47.0	68.4°	10.0	68.4°	64.1	32.8	7.2	42.0	5.1	10.4	114.5	79.2	45.1	63.9
	21.5	29in	52.1	68.4°	11.0	68.4°	66.4	32.8	7.2	42.0	5.1	10.4	116.7	79.2	47.0	64.9
Stache Aluminium	15.5	29in	39.4	68.9°	9.0	68.4°	56.3	32.9	6.0	42.0	5.1	10.0	107.1	79.8	37.9	62.1
	17.5	29in	41.9	68.9°	9.0	68.4°	59.1	32.9	6.0	42.0	5.1	10.0	109.9	80.9	40.7	62.1
	18.5	29in	44.5	68.9°	10.0	68.4°	60.9	32.9	6.0	42.0	5.1	10.0	111.7	82.0	42.1	63.0
	19.5	29in	47.0	68.9°	10.0	68.4°	62.4	32.9	6.0	42.0	5.1	10.0	113.2	80.8	43.6	63.0
	21.5	29in	52.1	68.9°	11.0	68.4°	64.6	32.9	6.0	42.0	5.1	10.0	115.5	80.8	45.6	64.0

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**Refers to high or low setting on adjustable-geometry bikes.

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Session DH Low geometry**	S	27.5in	41.2	57.0 °	11.5	63.6 °	57.4	35.6	-0.1	44.5	5.2	11.8	118.3	80.4	38.2	60.7
	M	27.5in	44.5	57.0 °	11.5	63.6 °	59.4	35.6	-0.1	44.5	5.2	11.8	120.3	79.0	40.2	60.7
	L	27.5in	44.5	57.0 °	11.5	63.6 °	61.8	35.6	-0.1	44.5	5.2	11.8	122.7	78.4	42.6	60.7
	XL	27.5in	48.3	57.0 °	11.5	63.6 °	64.2	35.6	-0.1	44.5	5.2	11.8	125.1	76.7	45.0	60.7
Session DH High geometry**	S	27.5in	41.2	57.6 °	11.5	64.2 °	57.0	36.4	0.9	44.3	5.2	11.4	118.5	81.0	38.2	60.7
	M	27.5in	44.5	57.6 °	11.5	64.2 °	59.0	36.4	0.9	44.3	5.2	11.4	120.5	79.3	40.2	60.7
	L	27.5in	44.5	57.6 °	11.5	64.2 °	61.4	36.4	0.9	44.3	5.2	11.4	122.9	79.0	45.0	60.7
	XL	27.5in	48.3	57.6 °	11.5	64.2 °	63.8	36.4	0.9	44.3	5.2	11.4	125.3	77.5	45.0	60.7
Ticket DJ	L	26in	33.0	71.0 °	12.0	70.0 °	60.1	32.0	1.0	40.0	4.0	7.8	105.0	69.1	41.4	54.3
Farley EX Carbon	15.5	27.5in	39.4	67.0 °	10.5	68.8 °	57.2	35.2	2.4	44.3	5.1	12.4	111.7	797.8	39.5	60.2
	17.5	27.5in	42.0	67.0 °	10.5	68.8 °	60.3	35.2	2.4	44.3	5.1	12.4	114.8	775.8	42.6	60.2
	18.5	27.5in	44.5	67.0 °	11.5	68.8 °	61.7	35.2	2.4	44.3	5.1	12.4	115.9	780.8	43.7	61.1
	19.5	27.5in	47.0	67.0 °	11.5	68.8 °	63.2	35.2	2.4	44.3	5.1	12.4	117.5	754.8	45.2	61.1
	21.5	27.5in	52.1	67.0 °	13.0	68.8 °	65.5	35.2	2.4	44.3	5.1	12.4	120.2	760.8	47.1	62.5
Farley EX Aluminium	15.5	27.5in	39.4	67.0 °	10.5	68.8 °	57.2	35.2	2.4	44.3	5.1	12.4	111.7	781.8	39.5	60.2
	17.5	27.5in	42.0	67.0 °	10.5	68.8 °	60.3	35.2	2.4	44.3	5.1	12.4	114.8	767.8	42.6	60.2
	18.5	27.5in	44.5	67.0 °	11.5	68.8 °	61.7	35.2	2.4	44.3	5.1	12.4	115.9	781.8	43.7	61.1
	19.5	27.5in	47.0	67.0 °	11.5	68.8 °	63.2	35.2	2.4	44.3	5.1	12.4	117.5	774.8	45.2	61.1
	21.5	27.5in	52.1	67.0 °	13.0	68.8 °	65.5	35.2	2.4	44.3	5.1	12.4	120.2	784.8	47.1	62.5
Farley Carbon	15.5"	27.5in	36.8	73.0 °	10.0	69.0 °	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8
	17.5"	27.5in	41.9	73.0 °	10.0	69.0 °	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75.0	41.0	59.8
	19.5"	27.5in	47.0	73.0 °	12.0	69.0 °	63.0	31.5	6.5	44.0	5.1	9.1	114.3	77.8	44.1	61.7
	21.5"	27.5in	52.1	73.0 °	12.0	69.0 °	64.3	31.5	6.5	44.0	5.1	9.1	115.6	81.6	45.4	61.7
	15.5"	26in	36.8	73.0 °	10.0	69.0 °	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8
Farley Aluminium	17.5"	26in	41.9	73.0 °	10.0	69.0 °	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75.0	41.0	59.8
	19.5"	26in	47.0	73.0 °	12.0	69.0 °	63.0	31.5	6.5	44.0	5.1	9.1	114.3	77.8	44.1	61.7
	21.5"	26in	52.1	73.0 °	12.0	69.0 °	64.3	31.5	6.5	44.0	5.1	9.1	115.6	81.6	45.4	61.7
	15.5"	26in	36.8	73.0 °	10.0	69.0 °	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8
	17.5"	26in	41.9	73.0 °	10.0	69.0 °	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75.0	41.0	59.8
Powerfly FS Low geometry*	15.5"	27.5in	36.8	71.5 °	10.0	66.9 °	57.0	33.2	2.4	47.4	5.1	8.8	117.7	76.0	40.5	59.4
	17.5"	27.5in	41.9	71.5 °	10.0	66.9 °	60.0	33.2	2.4	47.4	5.1	8.9	120.7	74.0	43.5	59.3
	18.5"	27.5in	44.5	71.5 °	10.5	66.9 °	62.0	33.2	2.4	47.4	5.1	8.9	122.8	73.5	45.3	59.8
	19.5"	27.5in	47.0	71.5 °	11.0	66.9 °	63.4	33.2	2.4	47.4	5.1	8.9	124.3	73.0	46.6	60.2
	21.5"	27.5in	52.1	71.5 °	12.5	66.9 °	66.2	33.2	2.4	47.4	5.1	8.9	127.3	74.0	49.0	61.6
Powerfly FS High geometry**	15.5"	27.5in	36.8	72.0 °	10.0	67.4 °	55.6	33.8	2.4	47.4	5.1	9.1	117.6	71.7	39.9	58.9
	17.5"	27.5in	41.9	72.0 °	10.0	67.4 °	60.0	33.8	2.4	47.4	5.1	9.1	120.7	74.1	44.2	58.8
	18.5"	27.5in	44.5	72.0 °	10.5	67.4 °	62.0	33.8	2.4	47.4	5.1	9.1	122.7	76.6	46.1	59.2
	19.5"	27.5in	47.0	72.0 °	11.0	67.4 °	63.4	33.8	2.4	47.4	5.1	9.1	124.2	79.1	47.3	59.2
	21.5"	27.5in	52.1	72.0 °	12.5	67.4 °	66.2	33.8	2.4	47.4	5.1	9.1	127.2	84.0	49.7	60.9
Powerfly FS LT Low geometry**	15.5"	27.5in	36.8	71.5 °	10.0	66.0 °	57.0	34.0	1.6	47.5	5.1	9.5	118.3	76.0	39.3	59.9
	17.5"	27.5in	41.9	71.5 °	10.0	66.0 °	60.0	34.0	1.6	47.5	5.1	9.5	121.3	74.0	42.3	59.9
	18.5"	27.5in	44.5	71.5 °	10.5	66.0 °	62.0	34.0	1.6	47.5	5.1	9.5	123.3	73.5	44.1	60.4
	19.5"	27.5in	47.0	71.5 °	11.0	66.0 °	63.4	34.0	1.6	47.5	5.1	9.5	124.8	73.0	45.4	60.8
	21.5"	27.5in	52.1	71.5 °	12.5	66.0 °	66.2	34.0	1.6	47.5	5.1	9.5	127.8	74.0	47.8	62.2
Powerfly FS LT High geometry**	15.5"	27.5in	36.8	72.0 °	10.0	66.5 °	57.0	34.6	1.6	47.4	5.1	9.8	118.2	72.3	39.9	59.4
	17.5"	27.5in	41.9	72.0 °	10.0	66.5 °	60.0	34.6	1.6	47.4	5.1	9.8	121.2	74.7	43.0	59.4
	18.5"	27.5in	44.5	72.0 °	10.5	66.5 °	62.0	34.6	1.6	47.4	5.1	9.8	123.3	77.1	44.9	59.8
	19.5"	27.5in	47.0	72.0 °	11.0	66.5 °	63.4	34.6	1.6	47.4	5.1	9.8	124.7	79.6	46.1	59.8
	21.5"	27.5in	52.1	72.0 °	12.5	66.5 °	66.2	34.6	1.6	47.4	5.1	9.8	127.7	84.5	48.5	61.6
Powerfly	15.5"	29in	40.0	73.0 °	14.0	69.0 °	56.1	33.2	5.3	48.5	5.1		112.0	78.8	36.5	63.8
	17.5"	29in	42.5	72.5 °	14.0	69.0 °	58.3	33.2	5.3	48.5	5.1		113.7	79.0	38.2	63.8
	19"	29in	47.0	72.5 °	16.0	69.0 °	60.7	33.2	5.3	48.5	5.1		116.2	81.1	40.0	65.6
	21"	29in	51.5	72.5 °	16.0	69.0 °	63.2	33.2	5.3	48.5	5.1		118.7	84.3	42.5	65.6
Powerfly Women's	15.5"	29in	40.0	73.0 °	14.0	69.0 °	55.5	32.0	4.8	46.5	4.4		109.5	72.5	36.5	62.1
	17.5"	29in	42.5	72.5 °	14.0	69.0 °	57.8	32.0	4.8	46.5	4.4		111.2	72.0	38.2	62.1


All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.


Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**Refers to high or low setting on adjustable-geometry bikes.



CITY GEOMETRY /



Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
FX S 6 FX S 5	50cm	700c	45.0	74.6 °	13.0	71.1 °	51.9		8.0	42.0	5.3	6.0	99.6	71.6	36.8	54.6
	52cm	700c	47.5	74.2 °	14.5	71.3 °	53.0		8.0	42.0	5.3	5.9	100.3	73.5	37.1	56.1
	54cm	700c	50.0	73.7 °	16.0	71.3 °	54.2		8.0	42.0	5.3	5.9	101.0	75.4	37.4	57.5
	56cm	700c	52.5	73.3 °	17.5	71.9 °	55.4		7.8	42.0	4.8	6.1	100.8	77.6	37.7	59.1
	58cm	700c	54.8	73.0 °	19.5	72.0 °	56.7		7.8	42.5	4.8	6.0	102.2	79.6	38.0	61.1
FX S 4 FX 3	60cm	700c	56.7	72.8 °	22.0	72.1 °	57.9		7.5	42.5	4.8	5.9	103.2	81.7	38.3	63.2
	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5		44.5	5.0	7.0	105.7	69.3		
	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5		44.5	5.0	7.0	105.7	73.5		
	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5		44.5	4.5	7.0	105.8	78.3		
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5		44.5	4.5	6.2	106.4	83.1		
FX 2 FX 1 FX	25"	700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5		44.5	4.5	6.2	106.5	87.7		
	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5		44.5	5.0	7.1	105.6	69.7		
	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5		44.5	5.0	7.1	105.6	73.8		
	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5		44.5	4.5	7.0	105.7	78.6		
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5		44.5	4.5	6.3	106.3	83.4		
FX Women's	25"	700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5		44.5	4.5	6.3	106.4	88.0		
	15" Stagger	700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5		44.5	5.0	7.1	105.6	62.7		
	17.5" Stagger	700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5		44.5	5.0	7.1	105.7	63.2		
	20" Stagger	700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5		44.5	4.5	7.0	105.7	63.6		
	22.5" Stagger	700c	57.2	73.0 °	19.0	72.5 °	58.5	28.5		44.5	4.5	6.3	106.3	64.0		
DS Series	13"	700c	33.0	75.0 °	11.5	70.0 °	53.0	28.5		44.5	5.0	7.3	105.3	66.6		
	15"	700c	38.1	75.0 °	13.0	70.5 °	53.3	28.5		44.5	5.0	7.0	105.3	69.7		
	17"	700c	43.2	74.5 °	15.0	70.5 °	53.9	28.5		44.5	5.0	7.0	105.5	73.2		
	19"	700c	48.3	74.0 °	16.0	70.5 °	55.3	28.5		44.5	5.0	7.0	106.4	76.7		
	15" Stagger	700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5		44.5	5.0	7.0	105.6	62.4		
Neko Women's	17.5" Stagger	700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5		44.5	5.0	7.0	105.7	63.0		
	20" Stagger	700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5		44.5	4.5	7.0	105.7	63.3		
	15.5"	700c	36.6	74.5 °	11.4	70.0 °	57.5	29.4		45.5	3.8	8.5	109.1	73.8		
	17.5"	700c	41.7	74.0 °	12.4	71.0 °	59.0	29.4		45.5	3.8	8.2	109.5	76.1		
	19"	700c	46.7	73.5 °	13.4	71.0 °	60.5	29.4		45.5	3.8	8.2	110.5	79.1		
Neko Women's	21"	700c	50.5	73.0 °	14.4	71.5 °	62.0	29.4		45.5	3.8	7.8	111.0	81.5		
	22.5"	700c	54.3	72.5 °	15.4	72.0 °	63.5	29.4		45.5	3.8	7.5	111.2	84.1		
	14"	700c	33.8	74.5 °	11.4	70.0 °	55.0	29.4		45.5	3.8	8.9	107.0	69.4		
	16"	700c	38.2	74.0 °	11.4	70.5 °	56.0	29.4		45.5	3.8	8.5	107.0	71.6		
	18"	700c	43.3	73.5 °	12.4	71.0 °	57.5	29.4		45.5	3.8	8.2	107.5	74.5		
Neko Women's	14" Stagger	700c	35.6	74.5 °	13.4	70.0 °	55.0	29.4		45.5	3.8	8.9	107.0	62.2		
	16" Stagger	700c	38.2	74.0 °	13.4	70.5 °	56.0	29.4		45.5	3.8	8.5	107.0	62.2		
	18" Stagger	700c	43.3	73.5 °	14.4	71.0 °	57.5	29.4		45.5	3.8	8.2	107.6	62.2		

All dimensions are in centimetres unless otherwise stated.
Not all sizes are available for all models.
Not all sizes are available in all markets.
*Frame size represents fit. For seat tube length, see column A - Seat tube.

CITY GEOMETRY /


Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
CrossRip	49cm	700c	49.0	75.0 °	11.5	69.9 °	52.2	27.7	7.4	43.5	5.0	7.6	103.1	73.9	37.6	53.6
	52cm	700c	52.0	74.0 °	12.1	70.5 °	52.4	27.7	7.4	43.5	5.0	7.2	103.7	75.6	38.7	56.0
	54cm	700c	54.0	73.5 °	14.3	70.5 °	55.4	27.7	7.4	43.5	5.0	7.2	104.3	77.5	39.6	58.2
	56cm	700c	56.0	73.0 °	16.0	71.0 °	57.0	28.1	7.0	43.5	5.0	6.9	105.1	79.4	40.2	59.6
	58cm	700c	58.0	73.0 °	17.3	71.5 °	57.8	28.1	7.0	43.5	5.0	6.9	105.4	81.0	40.6	61.1
	61cm	700c	61.0	72.5 °	19.3	71.5 °	59.4	28.1	7.0	43.5	5.0	6.6	106.5	83.4	41.0	63.0
Zektor	50cm	700c	50.0	74.5 °	12.3	72.0 °	52.6	29.4	6.5	43.7	5.0	6.4	101.6	77.8	37.5	54.3
	53cm	700c	53.0	74.0 °	14.3	72.0 °	54.0	29.4	6.5	43.7	5.0	6.4	102.5	80.1	37.8	56.2
	56cm	700c	56.0	73.5 °	16.3	72.0 °	56.0	29.4	6.5	43.7	5.0	6.4	104.0	82.4	38.7	58.1
	61cm	700c	61.0	72.5 °	20.3	72.0 °	59.5	29.4	6.5	43.7	5.0	6.4	106.5	86.8	40.0	61.9
	50cm Stagger	700c	50.0	74.5 °	12.0	72.0 °	52.5	29.4	6.5	43.7	5.0	6.4	101.5	62.7	37.5	54.0
	53cm Stagger	700c	53.0	74.0 °	14.0	72.0 °	53.9	29.4	6.5	43.7	5.0	6.4	102.4	62.0	37.8	55.9
Super Commuter+	56cm Stagger	700c	56.0	73.5 °	16.0	72.0 °	55.9	29.4	6.5	43.7	5.0	6.4	103.9	60.8	38.7	57.8
	45cm	700c	40.0	73.0 °	13.0	69.0 °	55.9	29.9	6.0	47.0	4.5	8.9	109.6	75.6	38.0	58.6
	50cm	700c	45.0	73.0 °	15.0	69.5 °	57.4	29.9	6.0	47.0	4.5	8.6	110.7	78.9	38.8	60.7
	55cm	700c	50.0	73.0 °	17.5	70.0 °	59.0	29.9	6.0	47.0	4.5	8.3	111.9	81.6	39.7	63.3
Conduit+	60cm	700c	55.0	73.0 °	20.5	70.5 °	61.3	29.9	6.0	47.0	4.5	7.9	113.8	85.1	41.0	66.3
	15"		38.1	74.5 °	13.2	70.5 °	54.7	28.9		46.5	4.5			70.9	39.1	56.0
	17.5"		44.4	74.0 °	14.7	70.5 °	54.8	28.9		46.5	4.5			74.9	38.4	57.4
	20"		50.8	73.5 °	16.7	71.5 °	56.4	28.9		46.5	4.5			79.1	38.8	59.7
Dual Sport+	22.5"		57.1	73.0 °	18.7	72.5 °	58.1	28.9		46.5	4.5			83.5	39.2	62.0
	15"	700c	39.3	74.5 °	11.4	70.0 °	57.5	28.8	6.6	46.5	3.8	7.8	110.5	71.9	40.9	59.8
	17.5"	700c	44.5	74.0 °	12.4	71.0 °	59.0	28.8	6.6	46.5	3.8	7.4	111.0	74.9	41.5	61.0
	20"	700c	48.3	73.5 °	13.4	71.0 °	60.5	28.8	6.6	46.5	3.8	7.4	112.0	77.2	42.1	61.9
Neko+ Women's	22.5"	700c	53.3	73.0 °	14.4	71.5 °	62.0	28.8	6.6	46.5	3.8	7.1	112.4	80.4	42.7	63.1
	25"	700c	57.1	72.5 °	15.4	72.0 °	63.5	28.8	6.6	46.5	3.8	6.8	112.7	83.0	43.3	64.2
	14"	700c	35.5	74.5 °	11.4	70.0 °	55.0	28.8	6.6	46.5	3.8	8.7	107.8	67.8	38.4	59.8
	16"	700c	40.6	74.0 °	11.4	70.5 °	56.0	28.8	6.6	46.5	3.8	8.5	107.8	70.3	38.8	60.0
	18"	700c	45.7	73.5 °	12.4	71.0 °	57.5	28.8	6.6	46.5	3.8	8.2	108.2	73.0	39.4	61.2

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.



KIDS' GEOMETRY /

Models	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height minimum	Seat height maximum
Émonda 650	26"	39.0	75.0 °	10.0	70.0 °	47.3	26.0	6.0	41.5	5.5	5.9	97.8	67.6	33.6	49.8	74.6	94.6
Dual Sport Kids'	26"	32.0	74.5 °	10.0	70.0 °	51.5	27.9	4.5	43.0	4.5	7.0	101.7	65.0	37.6	49.8	67.5	88.7
Neko Kids'	26"	32.0	74.5 °	10.0	70.0 °	51.5	27.9	4.5	43.0	4.5	7.0	101.7	60.4	37.6	49.8	67.5	88.7
Fuel EX Jr	26"	31.8	72.0 °	9.5	69.0 °	53.5	31.6	2.0	42.9	4.0		104.4	65.3	38.1	51.9		
Superfly 24	24"	29.0	72.0 °	10.5	70.0 °	52.9	26.2	3.8	40.0	4.5	6.1	98.0	60.5	37.3	48.2	67.2	79.7
Superfly 20	20"	25.5	72.0 °	13.5	70.0 °	44.5	24.0	1.5	36.3	4.2	4.8	86.3	51.8	30.6	42.7	59.6	71.2
Superfly 16	16"	20.5	70.0 °	10.0	70.0 °	39.7	20.1	0.0	30.4	3.4	3.7	73.7	47.3	27.1	34.6	49.7	61.0

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.