




# GEOMETRY GLOSSARY /

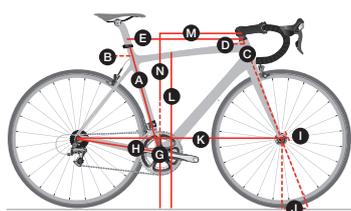

ROAD BIKES /

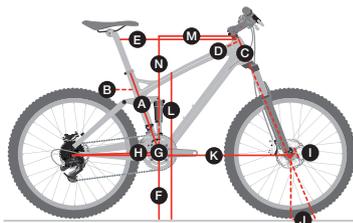

MOUNTAIN BIKES /

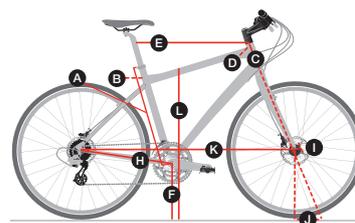

CITY BIKES /

<b>A</b> Seat tube	The distance from the center of the bottom bracket to the top of the seat tube.	<b>H</b> Chainstay length	The distance from the center of the bottom bracket to the center of the rear axle.
<b>B</b> Seat tube angle	The angle of seat tube to the ground. Tailored to optimize power transmission on each frame size.	<b>I</b> Offset	The perpendicular distance from the steering axis to the center of the front wheel.
<b>C</b> Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.	<b>J</b> Trail	The distance the front wheel's contact patch lags behind the steering axis.
<b>D</b> Head angle	The angle of head tube to the ground. Tailored to optimize steering precision on each frame size.	<b>K</b> Wheelbase	The distance between the axles. Tailored to optimize weight distribution on each frame size.
<b>E</b> Effective top tube	The horizontal measure from the center of the headset to the center of the seatpost. The most important measurement when buying a bike, because it cannot be changed.	<b>L</b> Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 8.25" in front of seat tube.
<b>F</b> Bottom bracket height	The vertical distance from the center of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.	<b>M</b> Frame reach	The horizontal distance from the bottom bracket center to the top of the head tube centerline.
<b>G</b> Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's center of gravity.	<b>N</b> Frame stack	The vertical distance from the bottom bracket center to the top of the head tube centerline.

**Notes:** All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tyres as well as different fork lengths will change the dimensions in these charts.

## ROAD GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Emonda H1 Fit	50cm	700c	45.3	74.6°	10.0	72.1°	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	50.6	58.5	68.0	68.0
	52cm	700c	48.2	74.2°	11.0	72.8°	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	51.8	61.5	71.0	71.0
	54cm	700c	49.6	73.7°	12.0	73.0°	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	52.6	64.0	73.5	73.5
	56cm	700c	52.5	73.3°	14.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	54.9	67.0	76.5	76.5
	58cm	700c	55.3	73.0°	16.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	56.7	69.0	78.5	78.5
	60cm	700c	57.3	72.8°	18.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	58.6	71.0	80.5	80.5
	62cm	700c	59.3	72.5°	20.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	60.6	73.0	82.5	82.5
Emonda H2 Fit	44cm	700c	40.8	74.6°	10.0	70.4°	49.9	7.2	41.0	5.0	6.8	97.1	68.2	36.2	49.9	53.5	63.0	63.0
	47cm	700c	44.4	74.6°	11.5	71.2°	51.3	7.2	41.0	4.5	6.7	97.4	69.8	36.9	52.2	55.5	65.0	65.0
	50cm	700c	47.6	74.6°	13.0	72.1°	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	53.5	58.5	68.0	68.0
	52cm	700c	49.3	74.2°	14.0	72.8°	53.4	7.2	41.0	4.5	5.7	97.7	72.9	37.9	54.7	61.5	71.0	71.0
	54cm	700c	50.6	73.7°	15.5	73.0°	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	55.5	64.0	73.5	73.5
	56cm	700c	53.3	73.3°	17.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	57.7	67.0	76.5	76.5
	58cm	700c	55.3	73.0°	19.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	59.6	69.0	78.5	78.5
	60cm	700c	57.3	72.8°	21.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	61.5	71.0	80.5	80.5
	62cm	700c	59.3	72.5°	23.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.4	73.0	82.5	82.5
Emonda ALR	47cm	700c	42.4	74.6°	11.5	71.2°	51.3	7.2	41.0	4.5	6.7	97.4	69.8	36.9	52.2			
	50cm	700c	45.6	74.6°	13.0	72.1°	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	53.5			
	52cm	700c	47.3	74.2°	14.0	72.8°	53.4	7.2	41.0	4.5	5.7	97.7	72.9	37.9	54.7			
	54cm	700c	48.6	73.7°	15.5	73.0°	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	55.5			
	56cm	700c	51.3	73.3°	17.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	57.7			
	58cm	700c	53.3	73.0°	19.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	59.6			
	60cm	700c	55.3	72.8°	21.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	61.5			
62cm	700c	57.3	72.5°	23.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.4				
64cm	700c	59.3	72.3°	25.0	74.0°	61.0	6.8	41.3	4.0	5.5	101.8	84.1	40.1	65.4				

All dimensions are in centimeters unless otherwise stated. Not all sizes are available for all models. Not all sizes are available in all markets. \*Frame size represents fit. For seat tube length, see column A - Seat tube.

ROAD GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Madone H1 Fit	50cm	700c	45.3	74.6°	10.0	72.1°	52.2	7.2	41.0	4.5	6.1	97.4	69.6	38.3	51.1	58.5	67.5	67.5
	52cm	700c	48.2	74.2°	11.0	72.8°	53.5	7.2	41.0	4.5	5.7	97.7	72.0	38.8	52.3	61.5	70.5	70.5
	54cm	700c	49.6	73.7°	12.0	73.0°	54.4	7.0	41.0	4.5	5.6	98.1	73.3	39.0	53.1	64.0	73.0	73.0
	56cm	700c	52.5	73.3°	14.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	75.8	39.5	55.4	67.0	76.0	76.0
	58cm	700c	55.3	73.0°	16.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.3	40.0	57.2	69.0	78.0	78.0
	60cm	700c	57.3	72.8°	18.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.1	40.4	59.1	71.0	80.0	80.0
	62cm	700c	59.3	72.5°	20.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.0	40.7	61.1	73.0	82.0	82.0
Madone H2 Fit	50cm	700c	47.6	74.6°	13.0	72.1°	52.1	7.2	41.0	4.5	6.1	97.4	70.7	37.4	54.0	58.5	67.5	67.5
	52cm	700c	49.3	74.2°	14.0	72.8°	53.2	7.2	41.0	4.5	5.7	97.7	72.9	37.9	55.2	61.5	70.5	70.5
	54cm	700c	50.6	73.7°	15.5	73.0°	54.3	7.0	41.0	4.5	5.6	98.1	74.2	38.1	56.0	64.0	73.0	73.0
	56cm	700c	53.3	73.3°	17.0	73.5°	56.0	7.0	41.0	4.0	5.8	98.3	76.7	38.7	58.2	67.0	76.0	76.0
	58cm	700c	55.3	73.0°	19.0	73.8°	57.3	6.8	41.1	4.0	5.6	99.2	78.6	39.1	60.1	69.0	78.0	78.0
	60cm	700c	57.3	72.8°	21.0	73.9°	58.6	6.8	41.1	4.0	5.6	100.1	80.4	39.5	62.0	71.0	80.0	80.0
	62cm	700c	59.3	72.5°	23.0	73.9°	59.8	6.8	41.2	4.0	5.5	101.0	82.2	39.8	63.9	73.0	82.0	82.0
Domane	44cm	700c	39.0	74.6°	9.5	70.3°	50.1	8.0	42.0	5.3	6.6	98.3	65.7	36.0	51.0	53.5	63.0	63.0
	47cm	700c	42.0	74.6°	11.0	71.0°	50.9	8.0	42.0	5.3	6.1	98.6	68.6	36.4	52.7	55.5	65.0	65.0
	50cm	700c	45.0	74.6°	13.0	71.1°	51.9	8.0	42.0	5.3	6.0	99.6	71.6	36.8	54.6	58.5	68.0	68.0
	52cm	700c	47.5	74.2°	14.5	71.3°	53.0	8.0	42.0	5.3	5.9	100.3	73.5	37.1	56.1	61.5	71.0	71.0
	54cm	700c	50.0	73.7°	16.0	71.3°	54.2	8.0	42.0	5.3	5.9	101.0	75.4	37.4	57.5	64.0	73.5	73.5
	56cm	700c	52.5	73.3°	17.5	71.9°	55.4	7.8	42.0	4.8	6.1	100.8	77.6	37.7	59.1	67.0	76.5	76.5
	58cm	700c	54.8	73.0°	19.5	72.0°	56.7	7.8	42.5	4.8	6.0	102.2	79.6	38.0	61.1	69.0	78.5	78.5
	60cm	700c	56.7	72.8°	22.0	72.1°	57.9	7.5	42.5	4.8	5.9	103.2	81.7	38.3	63.2	71.0	80.5	80.5
	62cm	700c	58.6	72.5°	24.5	72.1°	59.3	7.5	42.5	4.8	5.9	104.2	83.5	38.6	65.6	73.0	82.5	82.5
	Speed Concept	XS	650c	47.8	78.0°	9.0	72.0°	46.9	5.5	37.4	4.0	6.0	91.0	72.6	37.0	46.8	57.4	72.3
S		700c	50.3	78.0°	6.5	72.2°	49.5	8.0	40.0	4.5	6.1	96.1	75.0	39.0	49.2	59.9	74.7	74.7
M		700c	52.9	78.0°	9.0	72.5°	51.8	8.0	40.0	4.5	6.0	98.5	77.5	40.8	51.7	62.5	77.2	77.2
L		700c	55.3	78.0°	11.5	72.5°	54.1	8.0	40.0	4.5	6.0	101.0	79.9	42.6	54.1	64.9	79.6	79.6
Boone	XL	700c	57.8	78.0°	14.0	72.5°	56.5	8.0	40.0	4.5	6.0	103.7	82.3	44.5	56.5	67.3	82.0	82.0
	50cm	700c	47.6	75.0°	11.0	71.0°	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4	58.5	67.5	67.5
	52cm	700c	49.3	74.5°	12.3	71.5°	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7	61.5	70.5	70.5
	54cm	700c	51.3	74.0°	13.8	72.0°	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2	64.0	73.0	73.0
	56cm	700c	53.3	73.6°	15.7	72.0°	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0	67.0	76.0	76.0
	58cm	700c	55.3	73.3°	17.6	72.3°	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7	69.0	78.0	78.0
	61cm	700c	58.3	73.0°	20.5	72.3°	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4	72.0	81.0	81.0
Crockett	47cm	700c	44.4	75.3°	9.5	70.8°	50.7	7	42.5	4.5	7.5	99.5	72.4	37.1	51.9			
	50cm	700c	47.6	75.0°	11.0	71.0°	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4			
	52cm	700c	49.3	74.5°	12.3	71.5°	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7			
	54cm	700c	51.3	74.0°	13.8	72.0°	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2			
	56cm	700c	53.3	73.6°	15.7	72.0°	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0			
	58cm	700c	55.3	73.3°	17.6	72.3°	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7			
	61cm	700c	58.3	73.0°	20.5	72.3°	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4			

All dimensions are in centimeters unless otherwise stated. Not all sizes are available for all models. Not all sizes are available in all markets.  
 \*Frame size represents fit. For seat tube length, see column A - Seat tube.

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Top Fuel Low geometry**	15.5"	27.5"	39.4	69.5°	10.0	69.9°	55.8	33.0	2.5	42.7	4.7	8.0	106.4	73.2	39.2	56.1		
	17.5"	29"	41.9	68.5°	9.0	70.0°	59.3	33.0	3.9	43.5	5.1	8.0	111.1	72.4	42.7	57.7		
	18.5"	29"	44.5	68.5°	9.0	70.0°	60.9	33.0	3.9	43.5	5.1	8.0	112.7	71.9	44.3	57.7		
	19.5"	29"	47.0	68.5°	10.0	70.0°	62.5	33.0	3.9	43.5	5.1	8.0	114.4	71.9	45.7	58.7		
	21.5"	29"	49.5	68.5°	12.0	70.0°	64.6	33.0	3.9	43.5	5.1	8.0	116.6	71.9	47.2	60.6		
Top Fuel High geometry**	15.5"	27.5"	39.4	70.5°	10.0	70.9°	55.6	34.1	1.4	42.4	4.7	7.3	106.3	74.1	40.1	55.4		
	17.5"	29"	41.9	69.4°	9.0	70.9°	59.3	34.1	2.8	43.2	5.1	7.4	110.9	73.4	43.6	57.0		
	18.5"	29"	44.5	69.4°	9.0	70.9°	60.6	34.1	2.8	43.2	5.1	7.4	112.5	72.9	45.2	57.0		
	19.5"	29"	47.0	69.4°	10.0	70.9°	62.3	34.1	2.7	43.2	5.1	7.4	114.3	72.9	46.6	58.0		
	21.5"	29"	49.5	69.4°	12.0	70.9°	64.6	34.1	2.7	43.2	5.1	7.4	116.5	72.9	48.1	59.8		
Procaliber SL	15.5"	27.5"	39.4	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.3	105.3	72.7	38.2	58.3		
	17.5"	29"	41.9	72.5°	9.0	69.5°	59.9	31.1	5.8	43.5	5.1	8.3	109.8	75.0	41.2	59.5		
	18.5"	29"	44.5	72.0°	9.0	69.5°	61.7	31.1	5.8	43.5	5.1	8.3	111.3	76.4	42.7	59.5		
	19.5"	29"	47.0	72.0°	10.0	69.5°	63.8	31.1	5.8	43.5	5.1	8.3	113.2	77.8	44.2	60.4		
	21.5"	29"	52.1	72.0°	12.0	69.5°	65.9	31.1	5.8	43.5	5.1	8.3	115.4	81.6	45.7	62.3		
Procaliber Carbon Procaliber Aluminum	13.5"	27.5"	34.3	73.0°	10.0	69.0°	54.1	30.2	4.8	42.5	4.4	8.7	103.7	73.5	37.0	56.3		
	15.5"	27.5"	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	75.3	38.2	56.3		
	17.5"	29"	41.9	72.5°	9.0	69.5°	59.9	31.1	5.8	43.5	5.1	8.3	109.8	75.0	41.2	59.5		
	18.5"	29"	44.4	72.3°	9.0	69.5°	61.7	31.1	5.8	43.5	5.1	8.3	111.3	76.4	42.7	59.5		
	19.5"	29"	47.0	72.0°	10.0	69.5°	63.8	31.1	5.8	43.5	5.1	8.3	113.2	77.8	44.2	60.4		
Procaliber Aluminum Women's	21.5"	29"	52.1	72.0°	12.0	69.5°	65.9	31.1	5.8	43.5	5.1	8.3	115.4	81.6	45.7	62.8		
	23"	29"	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.7	47.1	63.2		
	13.5"	27.5"	34.3	73.0°	10.0	69.0°	54.1	30.2	4.8	42.5	4.4	8.7	103.7	73.5	37.0	56.3		
	15.5"	27.5"	36.8	73.0°	10.0	69.3												

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
X-Caliber	13.5"	27.5"	34.3	73.0°	9.0	69.2°	53.8	29.6	5.8	42.5	4.4	8.7	103.6	70.8	37.5	56.6		
	15.5"	27.5"	36.8	71.7°	9.0	69.2°	56.4	30.6	4.8	42.5	4.4	8.7	105.4	72.8	38.4	57.5		
	17.5"	29"	41.9	72.0°	9.0	69.3°	59.8	31.6	5.8	43.8	5.1	8.6	111.0	74.3	41.6	60.0		
	18.5"	29"	44.4	72.0°	9.0	69.3°	61.4	31.6	5.8	43.8	5.1	8.6	112.6	73.7	43.2	60.0		
	19.5"	29"	47.0	72.0°	10.0	69.3°	63.4	31.6	5.8	43.8	5.1	8.6	114.7	75.3	44.9	60.9		
	21.5"	29"	52.1	72.0°	12.0	69.3°	65.5	31.6	5.8	43.8	5.1	8.6	116.9	75.1	46.4	62.8		
X-Caliber Women's	23"	29"	55.9	72.0°	12.0	69.3°	66.9	31.6	5.8	43.8	5.1	8.6	118.3	77.3	47.8	62.8		
	13.5"	27.5"	34.3	73.0°	9.0	69.2°	53.8	29.6	5.8	42.5	4.4	8.7	103.6	70.8	37.5	56.6		
	15.5"	27.5"	36.8	71.7°	9.0	69.2°	56.4	30.6	4.8	42.5	4.4	8.7	105.4	72.8	38.4	57.5		
	17.5"	29"	41.9	72.0°	9.0	69.3°	59.8	31.6	5.8	43.8	5.1	8.6	111.0	74.3	41.6	60.0		
Roscoe	18.5"	29"	44.4	72.0°	9.0	69.3°	61.4	31.6	5.8	43.8	5.1	8.6	112.6	73.7	43.2	60.0		
	13.5"	27.5 +	34.3	73.0°	9.0	68.2°	53.2	30.9	6.8	43.8	5.1	9.2	106.7	72.3	36.3	59.8		
	15.5"	27.5 +	36.8	71.0°	9.0	68.3°	57.3	31.8	5.8	43.8	5.1	9.1	108.9	75.1	37.6	60.7		
	17.5"	27.5 +	41.9	71.0°	9.0	68.3°	60.2	31.8	5.8	43.8	5.1	9.1	111.8	74.7	40.5	60.7		
	18.5"	27.5 +	44.4	71.0°	9.0	68.3°	61.8	31.8	5.8	43.8	5.1	9.1	113.4	74.1	42.2	60.7		
	19.5"	27.5 +	47.0	71.0°	10.0	68.3°	63.8	31.8	5.8	43.8	5.1	9.1	115.4	75.7	43.9	61.7		
Roscoe Women's	21.5"	27.5 +	52.1	71.0°	12.0	68.3°	65.9	31.8	5.8	43.8	5.1	9.1	117.6	75.3	45.3	63.6		
	23"	27.5 +	55.9	71.0°	12.0	68.3°	67.3	31.8	5.8	43.8	5.1	9.1	119.0	77.5	46.8	63.9		
	13.5"	27.5 +	34.3	73.0°	9.0	68.2°	53.2	30.9	6.8	43.8	5.1	9.2	106.7	72.3	36.3	59.8		
	15.5"	27.5 +	36.8	71.0°	9.0	68.3°	57.3	31.8	5.8	43.8	5.1	9.1	108.9	75.1	37.6	60.7		
Marlin	17.5"	27.5 +	41.9	71.0°	9.0	68.3°	60.2	31.8	5.8	43.8	5.1	9.1	111.8	74.7	40.5	60.7		
	18.5"	27.5 +	44.4	71.0°	9.0	68.3°	61.8	31.8	5.8	43.8	5.1	9.1	113.4	74.1	42.2	60.7		
	13.5"	27.5"	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5		
	15.5"	27.5"	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5		
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0		
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1		
Skye SL Skye S	19.5"	29"	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1		
	21.5"	29"	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0		
	23"	29"	55.9	72.0°	12.0	69.6°	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0		
	18.5"	29"	44.5	73.0°	10.0	69.0°	61.2	31.2	0.0	44.5	5.1	8.5	113.5	68.5	42.9	59.8		
Skye	13"	26"	33.0	74.0°	11.0	70.5°	52.4	28.7	0.0	43.0	4.0	7.6	101.9	65.5				
	16"	26"	40.6	73.5°	11.0	70.5°	54.6	29.1	0.0	43.0	4.0	7.6	103.6	63.1				
	19.5"	26"	49.5	73.0°	17.0	70.5°	57.5	29.3	0.0	43.0	4.0	7.6	106.4	62.5				
Fuel EX Carbon 29 Low geometry**	15.5"	29"	39.4	65.5°	10.0	67.0°	56.6	33.5	3.9	43.3	5.1	10.3	112.2	76.0	39.1	60.9		
	17.5"	29"	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9		
	18.5"	29"	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9		
	19.5"	29"	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9		
	21.5"	29"	51.0	65.5°	11.0	67.0°	65.7	33.5	3.9	43.3	5.1	10.3	121.5	74.0	48.0	61.8		
Fuel EX Carbon 29 High geometry**	15.5"	29"	39.4	66.2°	10.0	67.7°	56.5	34.4	3.0	43.2	5.1	9.9	112.1	76.7	39.9	60.4		
	17.5"	29"	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3		
	18.5"	29"	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3		
	19.5"	29"	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3		
	21.5"	29"	51.0	66.2°	11.0	67.7°	65.7	34.4	3.0	43.2	5.1	9.9	121.4	74.7	48.7	61.2		
Fuel EX Aluminum 29 Low geometry**	15.5"	29"	39.4	65.5°	10.0	67.0°	56.6	33.5	3.9	43.3	5.1	10.3	112.2	76.0	39.1	60.9		
	17.5"	29"	41.9	65.5°	10.0	67.0°	60.1	33.5	3.9	43.3	5.1	10.3	115.7	74.0	42.6	60.9		
	18.5"	29"	44.0	65.5°	10.0	67.0°	61.8	33.5	3.9	43.3	5.1	10.3	117.4	73.5	44.3	60.9		
	19.5"	29"	47.0	65.5°	10.0	67.0°	63.3	33.5	3.9	43.3	5.1	10.3	118.9	73.0	45.8	60.9		
	21.5"	29"	51.0	65.5°	11.0	67.0°	65.7	33.5	3.9	43.3	5.1	10.3	121.5	74.0	48.0	61.8		
Fuel EX Aluminum 29 High geometry**	23"	29"	56.0	65.5°	14.5	67.0°	68.6	33.5	3.9	43.3	5.1	10.3	124.8	78.0	50.0	65.0		
	15.5"	29"	39.4	66.2°	10.0	67.7°	56.5	34.4	3.0	43.2	5.1	9.9	112.1	76.7	39.9	60.4		
	17.5"	29"	41.9	66.2°	10.0	67.7°	60.0	34.4	3.0	43.2	5.1	9.9	115.6	74.7	43.3	60.3		
	18.5"	29"	44.0	66.2°	10.0	67.7°	61.7	34.4	3.0	43.2	5.1	9.9	117.3	74.2	45.0	60.3		
	19.5"	29"	47.0	66.2°	10.0	67.7°	63.2	34.4	3.0	43.2	5.1	9.9	118.8	73.7	46.5	60.3		
Fuel EX Carbon 27.5+ Low geometry**	21.5"	29"	51.0	66.2°	11.0	67.7°	65.7	34.4	3.0	43.2	5.1	9.9	121.4	74.7	48.7	61.2		
	23"	29"	56.0	66.1°	14.5	67.7°	68.6	34.4	3.0	43.2	5.1	9.9	124.7	78.7	50.7	64.4		
	15.5"	27.5"	39.4	65.1°	10.0	66.6°	56.6	32.3	3.9	43.2	5.1	10.6	112.2	76.0	39.1	61.3		
	17.5"	27.5"	41.9	65.1°	10.0	66.6°	60.1	32.3	3.9	43.2	5.1	10.6	115.7	74.0	42.6	61.2		
	18.5"	27.5"	44.0	65.1°	10.0	66.6°	61.8	32.3	3.9	43.2	5.1	10.6	117.4	73.5	44.3	61.2		
Fuel EX Carbon 27.5+ High geometry**	19.5"	27.5"	47.0	65.1°	10.0	66.6°	63.3	32.3	3.9	43.2	5.1	10.6	118.9	73.0	45.8	61.2		
	21.5"	27.5"	51.0	65.1°	11.0	66.6°	65.7	32.3	3.9	43.2	5.1	10.6	121.5	74.0	48.0	62.1		
	15.5"	27.5"	39.4	65.7°	10.0	67.2°	56.5	32.9	3.0	43.3	5.1	10.2	112.1	76.7	39.9	60.7		
	17.5"	27.5"	41.9	65.7°	10.0	67.2°	60.0	32.9	3.0	43.3	5.1	10.2	115.6	74.7	43.3	60.6		
	18.5"	27.5"	44.0	65.7°	10.0	67.2°	61.7	32.9	3.0	43.3	5.1	10.2	117.3	74.2	45.0	60.6		
Fuel EX Aluminum 27.5+ Low geometry**	19.5"	27.5"	47.0	65.7°	10.0	67.2°	63.2	32.9	3.0	43.3	5.1	10.2	118.8	73.7	46.5	60.6		
	21.5"	27.5"	51.0	65.7°	11.0	67.2°	65.7	32.9	3.0	43.3	5.1	10.2	121.4	74.7	48.7	61.5		
	15.5"	27.5"	39.4	65.1°	10.0	66.6°	56.6	32.3	3.9	43.2	5.1	10.6	112.2	76.0	39.1	61.3		
	17.5"	27.5"	41.9	65.1°	10.0	66.6°	60.1	32.3	3.9	43.2	5.1	10.6	115.7	74.0	42.6	61.2		
	18.5"	27.5"	44.0	65.1°	10.0	66.6°	61.8											

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Fuel EX Aluminum 27.5+ High geometry**	15.5"	27.5"	39.4	65.7°	10.0	67.2°	56.5	32.9	3.0	43.3	5.1	10.2	112.1	76.7	39.9	60.7		
	17.5"	27.5"	41.9	65.7°	10.0	67.2°	60.0	32.9	3.0	43.3	5.1	10.2	115.6	74.7	43.3	60.6		
	18.5"	27.5"	44.0	65.7°	10.0	67.2°	61.7	32.9	3.0	43.3	5.1	10.2	117.3	74.2	45.0	60.6		
	19.5"	27.5"	47.0	65.7°	10.0	67.2°	63.2	32.9	3.0	43.3	5.1	10.2	118.8	73.7	46.5	60.6		
	21.5"	27.5"	51.0	65.7°	11.0	67.2°	65.7	32.9	3.0	43.3	5.1	10.2	121.4	74.7	48.7	61.5		
Fuel EX Carbon Women's Low geometry**	23"	27.5"	56.0	65.7°	14.5	67.2°	68.6	32.9	3.0	43.3	5.1	10.2	124.7	78.7	50.7	64.8		
	14"	27.5"	35.6	65.8°	9.0	67.0°	54.4	33.0	2.6	43.4	4.3	10.4	108.8	74.9	37.5	57.1		
Fuel EX Carbon Women's High geometry**	15.5"	27.5"	39.4	65.8°	10.0	67.0°	56.3	33.0	2.6	43.4	4.3	10.4	110.7	75.5	39.1	58.0		
	14"	27.5"	35.6	66.5°	9.0	67.7°	54.2	33.8	1.2	43.3	4.3	10.4	108.6	75.5	38.2	56.6		
Fuel EX Aluminum Women's Low geometry**	15.5"	27.5"	39.4	66.5°	10.0	67.7°	56.1	33.8	1.2	43.3	4.3	10.4	110.6	76.2	39.8	57.5		
	14"	27.5"	35.6	65.8°	9.0	67.0°	54.4	33.0	2.6	43.4	4.3	10.4	108.8	75.0	37.5	57.1		
Fuel EX Aluminum Women's High geometry**	15.5"	27.5"	39.4	65.8°	10.0	67.0°	56.3	33.0	2.6	43.4	4.3	10.4	110.7	76.6	39.1	58.0		
	14"	27.5"	35.6	66.5°	9.0	67.7°	54.2	33.8	1.2	43.3	4.3	10.4	108.6	75.7	38.2	56.6		
Remedy Carbon Low geometry** 160mm fork	15.5"	27.5"	39.4	67.1°	10.0	65.0°	55.1	33.9	1.6	43.5	4.3	11.4	113.6	75.6	39.2	59.1		
	17.5"	27.5"	41.9	67.2°	10.0	65.0°	58.1	33.9	1.6	43.5	4.3	11.4	116.6	75.0	42.2	59.1		
Remedy Carbon High geometry** 160mm fork	18.5"	27.5"	44.5	67.2°	10.5	65.0°	60.0	33.9	1.6	43.5	4.3	11.4	118.5	74.8	43.9	59.6		
	19.5"	27.5"	47.0	67.2°	11.0	65.0°	61.6	33.9	1.6	43.5	4.3	11.4	120.1	74.3	45.3	60.1		
	21.5"	27.5"	52.1	67.2°	12.5	65.0°	64.5	33.9	1.6	43.5	4.3	11.4	123.1	74.8	47.7	61.4		
	15.5"	27.5"	39.4	67.7°	10.0	65.5°	54.9	34.6	0.9	43.3	4.3	11.1	113.5	76.2	39.8	58.7		
	17.5"	27.5"	41.9	67.7°	10.0	65.5°	57.9	34.6	0.9	43.3	4.3	11.1	116.5	75.6	42.8	58.7		
Remedy Aluminum Low geometry** 160mm fork	18.5"	27.5"	44.5	67.7°	10.5	65.5°	59.7	34.6	0.9	43.3	4.3	11.1	118.4	75.4	44.5	59.2		
	19.5"	27.5"	47.0	67.7°	11.0	65.5°	61.3	34.6	0.9	43.3	4.3	11.1	120.0	75.0	45.9	59.6		
	21.5"	27.5"	52.1	67.7°	12.5	65.5°	64.3	34.6	0.9	43.3	4.3	11.1	123.0	75.5	48.3	61.0		
	15.5"	27.5"	39.4	67.1°	10.0	65.0°	55.1	33.9	1.6	43.5	4.3	11.4	113.6	79.4	39.2	59.1		
	17.5"	27.5"	41.9	67.2°	10.0	65.0°	58.1	33.9	1.6	43.5	4.3	11.4	116.6	77.2	42.2	59.1		
Remedy Aluminum High geometry** 160mm fork	18.5"	27.5"	44.5	67.2°	10.5	65.0°	60.0	33.9	1.6	43.5	4.3	11.4	118.5	76.4	43.9	59.6		
	19.5"	27.5"	47.0	67.2°	11.0	65.0°	61.6	33.9	1.6	43.5	4.3	11.4	120.1	75.8	45.3	60.1		
	21.5"	27.5"	52.1	67.2°	12.5	65.0°	64.5	33.9	1.6	43.5	4.3	11.4	123.1	77.3	47.7	61.4		
	15.5"	27.5"	39.4	67.7°	10.0	65.5°	54.9	34.6	0.9	43.3	4.3	11.1	113.5	80.0	39.8	58.7		
	17.5"	27.5"	41.9	67.7°	10.0	65.5°	57.9	34.6	0.9	43.3	4.3	11.1	116.5	77.8	42.8	58.7		
Slash Carbon Low geometry** 160mm fork	18.5"	27.5"	44.5	67.7°	10.5	65.5°	59.7	34.6	0.9	43.3	4.3	11.1	118.4	77.1	44.5	59.2		
	19.5"	27.5"	47.0	67.7°	11.0	65.5°	61.3	34.6	0.9	43.3	4.3	11.1	120.0	76.5	45.9	59.6		
	21.5"	27.5"	52.1	67.7°	12.5	65.5°	64.3	34.6	0.9	43.3	4.3	11.1	123.0	78.0	48.3	61.0		
	15.5"	29"	39.4	64.3°	10.0	65.1°	59.0	34.5	2.8	43.4	5.1	11.7	117.2	78.7	41.0	61.2		
	17.5"	29"	41.9	64.3°	10.0	65.1°	60.5	34.5	2.8	43.4	5.1	11.7	118.7	77.8	43.0	61.2		
Slash Carbon High geometry** 160mm fork	19.5"	29"	46.8	64.3°	11.0	65.1°	63.5	34.5	2.8	43.4	5.1	11.7	121.9	77.2	44.5	62.8		
	21.5"	29"	52.2	64.3°	12.5	65.1°	66.1	34.5	2.8	43.4	5.1	11.7	124.8	77.0	47.5	63.5		
	15.5"	29"	39.4	64.8°	10.0	65.6°	59.0	35.2	2.1	43.3	5.1	11.4	117.1	79.3	41.6	60.8		
	17.5"	29"	41.9	64.8°	10.0	65.6°	60.5	35.2	2.1	43.3	5.1	11.4	118.6	78.4	43.1	60.8		
	19.5"	29"	46.8	64.8°	11.0	65.6°	63.5	35.2	2.1	43.3	5.1	11.4	121.9	77.8	45.9	61.8		
Stache Carbon	21.5"	29"	52.2	64.8°	12.5	65.6°	66.1	35.2	2.1	43.3	5.1	11.4	124.7	77.6	48.1	63.1		
	15.5"	29"	39.4	68.4°	9.0	68.4°	58.0	32.8	7.2	42.0	5.1	10.4	108.5	77.8	39.3	63.0		
	17.5"	29"	41.9	68.4°	9.0	68.4°	60.8	32.8	7.2	42.0	5.1	10.4	111.2	79.1	42.2	63.0		
Stache Aluminum	19.5"	29"	47.0	68.4°	10.0	68.4°	64.1	32.8	7.2	42.0	5.1	10.4	114.5	79.2	45.1	63.9		
	21.5"	29"	52.1	68.4°	11.0	68.4°	66.4	32.8	7.2	42.0	5.1	10.4	116.7	79.2	47.0	64.9		
	15.5"	29"	39.4	68.9°	9.0	68.4°	56.3	32.9	6.0	42.0	5.1	10.0	107.1	79.8	37.9	62.1		
	17.5"	29"	41.9	68.9°	9.0	68.4°	59.1	32.9	6.0	42.0	5.1	10.0	109.9	80.9	40.7	62.1		
	18.5"	29"	44.5	68.9°	10.0	68.4°	60.9	32.9	6.0	42.0	5.1	10.0	111.7	82.0	42.1	63.0		
Session Carbon 27.5 Low Geometry**	19.5"	29"	47.0	68.9°	10.0	68.4°	62.4	32.9	6.0	42.0	5.1	10.0	113.2	80.8	43.6	63.0		
	21.5"	29"	52.1	68.9°	11.0	68.4°	64.6	32.9	6.0	42.0	5.1	10.0	115.5	80.8	45.6	64.0		
	27.5"	42.5	57.5°	11.5	63.0°	58.1	34.9	8.5	44.6	5.2	12.4	121.7	73.2	40.5	61.9			
	27.5"	42.5	57.5°	11.5	63.0°	60.0	34.9	8.5	44.6	5.2	12.4	123.6	73.3	42.4	61.9			
	27.5"	45.6	57.5°	11.5	63.0°	62.1	34.9	8.5	44.6	5.2	12.4	125.7	74	44.5	61.9			
Session Carbon 27.5 High Geometry**	27.5"	45.6	57.5°	11.5	63.0°	64.6	34.9	8.5	44.6	5.2	12.4	128.2	74.2	47.0	61.9			
	27.5"	42.5	58.0°	11.5	63.5°	57.9	35.6	2.0	44.5	5.2	12.0	121.6	73.8	41.0	61.6			
	27.5"	42.5	58.0°	11.5	63.5°	58.4	35.6	2.0	44.5	5.2	12.0	123.5	43.9	42.9	61.6			
	27.5"	45.6	58.0°	11.5	63.5°	60.6	35.6	2.0	44.5	5.2	12.0	125.6	74.6	45.0	61.6			
	27.5"	45.6	58.0°	11.5	63.5°	63.1	35.6	2.0	44.5	5.2	12.0	128.1	74.8	47.5	61.6			
Session Carbon 29 Low Geometry**	29"	42.5	56.6°	11.5	62.1°	58.3	35.0	22.5	45.0	5.8	13.1	122.6	73.5	39.6	61.9			
	29"	42.5	56.6°	11.5	62.1°	60.2	35.0	22.5	45.0	5.8	13.1	124.5	73.6	41.5	61.9			
	29"	45.6	56.6°	11.5	62.1°	62.3	35.0	22.5	45.0	5.8	13.1	126.6	74.3	43.6	61.9			
	29"	45.6	56.6°	11.5	62.1°	64.8	35.0	22.5	45.0	5.8	13.1	129.1	74.5	46.1	61.9			
Session Carbon 29 High Geometry**	29"	42.5	57.1°	11.5	62.6°	58.2	35.6	16.0	44.9	5.8	12.8	122.5	74.1	40.1	61.6			
	29"	42.5	57.1°	11.5	62.6°	60.1	35.6	16.0	44.9	5.8	12.8	124.4	74.2	41.9	61.6			
	29"	45.6	57.1°	11.5	62.6°	62.2	35.6	16.0	44.9	5.8	12.8	126.5	74.9	44.0	61.6			
	29"	45.6	57.1°	11.5	62.6°	64.7	35.6	16.0	44.9	5.8	12.8	129.0	75.1	46.5	61.6			
Session Alloy 27.5 Low geometry**	S	27.5"	42.6	57.0°	11.5	63.6°	57.4	35.6	-0.1	44.5	5.2	11.8	118.3	80.4	38.2	60.7		
	M	27.5"	42.6	57.0°	11.5													

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Ticket S Low geometry**	L	26"	33.1	75.0°	12.3	68.5°	56.5	33.0	0.3	40.0	4.0	8.8	108.5	37.5	42.6	54.7		
Ticket S High geometry**	L	26"	33.1	75.8°	12.3	69.3°	56.3	33.9	0.6	39.8	4.0	8.8	108.3	38.3	43.3	54.7		
Ticket DJ	L	26"	33.0	71.0°	12.0	70.0°	60.1	32.0	1.0	40.0	4.0	7.8	105.0	69.1	41.4	54.3		
Farley EX Carbon	15.5"	27.5"	39.4	67.0°	10.5	68.8°	57.2	35.2	2.4	44.3	5.1	12.4	111.7	79.8	39.5	60.2		
	17.5"	27.5"	42.0	67.0°	10.5	68.8°	60.3	35.2	2.4	44.3	5.1	12.4	114.8	77.6	42.6	60.2		
	18.5"	27.5"	44.5	67.0°	11.5	68.8°	61.7	35.2	2.4	44.3	5.1	12.4	115.9	78.1	43.7	61.1		
	19.5"	27.5"	47.0	67.0°	11.5	68.8°	63.2	35.2	2.4	44.3	5.1	12.4	117.5	75.5	45.2	61.1		
	21.5"	27.5"	52.1	67.0°	13.0	68.8°	65.5	35.2	2.4	44.3	5.1	12.4	120.2	76.1	47.1	62.5		
Farley 7 Farley 5	15.5"	26"	36.8	73.0°	10.0	69.0°	56.6	31.5	6.5	44.0	5.1	9.1	107.8	76.4	38.3	59.8		
	17.5"	26"	41.9	73.0°	10.0	69.0°	59.3	31.5	6.5	44.0	5.1	9.1	110.5	75.0	41.0	59.8		
	19.5"	26"	47.0	73.0°	12.0	69.0°	63.0	31.5	6.5	44.0	5.1	9.1	114.3	77.8	44.1	61.7		
	21.5"	26"	52.1	73.0°	12.0	69.0°	64.3	31.5	6.5	44.0	5.1	9.1	115.6	81.6	45.4	61.7		
Powerfly FS Low geometry**	15.5"	27.5"	36.8	71.5°	10.0	66.9°	57.0	33.2	2.4	47.4	5.1	8.8	117.7	76.0	40.5	59.4		
	17.5"	27.5"	41.9	71.5°	10.0	66.9°	60.0	33.2	2.4	47.4	5.1	8.9	120.7	74.0	43.5	59.3		
	18.5"	27.5"	44.5	71.5°	10.5	66.9°	62.0	33.2	2.4	47.4	5.1	8.9	122.8	73.5	45.3	59.8		
	19.5"	27.5"	47.0	71.5°	11.0	66.9°	63.4	33.2	2.4	47.4	5.1	8.9	124.3	73.0	46.6	60.2		
	21.5"	27.5"	52.1	71.5°	12.5	66.9°	66.2	33.2	2.4	47.4	5.1	8.9	127.3	74.0	49.0	61.6		
Powerfly FS High geometry**	15.5"	27.5"	36.8	72.0°	10.0	67.4°	55.6	33.8	2.4	47.4	5.1	9.1	117.6	71.7	39.9	58.9		
	17.5"	27.5"	41.9	72.0°	10.0	67.4°	60.0	33.8	2.4	47.4	5.1	9.1	120.7	74.1	44.2	58.8		
	18.5"	27.5"	44.5	72.0°	10.5	67.4°	62.0	33.8	2.4	47.4	5.1	9.1	122.7	76.6	46.1	59.2		
	19.5"	27.5"	47.0	72.0°	11.0	67.4°	63.4	33.8	2.4	47.4	5.1	9.1	124.2	79.1	47.3	59.2		
	21.5"	27.5"	52.1	72.0°	12.5	67.4°	66.2	33.8	2.4	47.4	5.1	9.1	127.2	84.0	49.7	60.9		
Powerfly FS LT Low geometry**	15.5"	27.5"	36.8	71.5°	10.0	66.0°	57.0	34.0	1.6	47.5	5.1	9.5	118.3	76.0	39.3	59.9		
	17.5"	27.5"	41.9	71.5°	10.0	66.0°	60.0	34.0	1.6	47.5	5.1	9.5	121.3	74.0	42.3	59.9		
	18.5"	27.5"	44.5	71.5°	10.5	66.0°	62.0	34.0	1.6	47.5	5.1	9.5	123.3	73.5	44.1	60.4		
	19.5"	27.5"	47.0	71.5°	11.0	66.0°	63.4	34.0	1.6	47.5	5.1	9.5	124.8	73.0	45.4	60.8		
	21.5"	27.5"	52.1	71.5°	12.5	66.0°	66.2	34.0	1.6	47.5	5.1	9.5	127.8	74.0	47.8	62.2		
Powerfly FS LT High geometry**	15.5"	27.5"	36.8	72.0°	10.0	66.5°	57.0	34.6	1.6	47.4	5.1	9.8	118.2	72.3	39.9	59.4		
	17.5"	27.5"	41.9	72.0°	10.0	66.5°	60.0	34.6	1.6	47.4	5.1	9.8	121.2	74.7	43.0	59.4		
	18.5"	27.5"	44.5	72.0°	10.5	66.5°	62.0	34.6	1.6	47.4	5.1	9.8	123.3	77.1	44.9	59.8		
	19.5"	27.5"	47.0	72.0°	11.0	66.5°	63.4	34.6	1.6	47.4	5.1	9.8	124.7	79.6	46.1	59.8		
	21.5"	27.5"	52.1	72.0°	12.5	66.5°	66.2	34.6	1.6	47.4	5.1	9.8	127.7	84.5	48.5	61.6		
Powerfly 9	15.5"	27.5+	39.4	72.5°	12.0	68.5°	57.9	31.0	4.5	48.5	5.1	8.5	114.8	77.9	38.1	62.7		
	17.5"	27.5+	41.9	72.5°	12.0	68.5°	59.9	31.0	4.5	48.5	5.1	8.5	116.8	77.6	40.1	62.7		
	19.5"	27.5+	47.0	72.5°	14.0	68.5°	64.0	31.0	4.5	48.5	5.1	8.5	121.0	78.1	43.6	64.6		
	21.5"	27.5+	52.1	72.5°	16.0	68.5°	67.1	31.0	4.5	48.5	5.1	8.5	124.3	81.3	46.1	66.5		
Powerfly 7 Powerfly 5	15.5"	27.5"	39.4	72.5°	12.0	68.5°	56.3	31.0	4.6	46.5	4.3	9.4	110.1	76.6	37.5	59.7		
	17.5"	29"	41.9	73.6°	12.0	69.6°	59.5	31.6	5.4	48.5	5.1	8.3	116.0	78.0	41.3	62.0		
	19.5"	29"	47.0	73.6°	14.0	69.6°	63.6	31.6	5.4	48.5	5.1	8.3	120.1	78.5	44.8	63.8		
	21.5"	29"	52.1	73.6°	16.0	69.6°	66.7	31.6	5.4	48.5	5.1	8.3	123.4	81.8	47.3	65.6		
Powerfly 7 Women's Powerfly 5 Women's	14.0"	27.5"	35.6	72.5°	12.0	68.5°	55.4	31.0	4.6	46.5	4.3	9.4	109.2	74.6	36.6	59.7		
	15.5"	27.5"	39.4	72.5°	12.0	68.5°	56.3	31.0	4.6	46.5	4.3	9.4	110.1	64.0	37.5	59.7		
	17.5"	29"	47.0	73.6°	14.0	69.6°	63.6	31.6	5.4	48.5	5.1	8.3	120.1	76.1	44.8	63.8		
	19.5"	29"	52.1	73.6°	16.0	69.6°	66.7	31.6	5.4	48.5	5.1	8.3	123.4	81.8	47.3	65.6		
Powerfly 4	15.5"	29"	40.0	73.0°	14.0	69.0°	56.1	33.2	5.3	48.5	5.1		112.0	78.8	36.5	63.8		
	17.5"	29"	42.5	72.5°	14.0	69.0°	58.3	33.2	5.3	48.5	5.1		113.7	79.0	38.2	63.8		
	19"	29"	47.0	72.5°	16.0	69.0°	60.7	33.2	5.3	48.5	5.1		116.2	81.1	40.0	65.6		
	21"	29"	51.5	72.5°	16.0	69.0°	63.2	33.2	5.3	48.5	5.1		118.7	84.3	42.5	65.6		
Powerfly 4 Women's	15.5"	27.5"	40.0	73.0°	14.0	69.0°	55.5	32.0	4.8	46.5	4.4		109.5	72.5	36.5	62.1		
	17.5"	27.5"	42.5	72.5°	14.0	69.0°	57.8	32.0	4.8	46.5	4.4		111.2	72.0	38.2	62.1		

All dimensions are in centimeters unless otherwise stated. Not all sizes are available for all models. Not all sizes are available in all markets.  
 \*Frame size represents fit. For seat tube length, see column A - Seat tube.  
 \*\*Refers to high or low setting on adjustable-geometry bikes.

CITY GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum	
Neko+	14"	700c	35.5	74.5°	11.4	70.0°	55.0	28.8	6.6	46.5	3.8	8.7	107.8	67.8	38.4	59.8			
	16"	700c	40.6	74.0°	11.4	70.5°	56.0	28.8	6.6	46.5	3.8	8.5	107.8	70.3	38.8	60.0			
	18"	700c	45.7	73.5°	12.4	71.0°	57.5	28.8	6.6	46.5	3.8	8.2	108.2	73.0	39.4	61.2			
Conduit+	15"	700c	38.1	74.5°	13.2	70.5°	54.7	28.9	6.5	46.5	4.5	7.8	107.5	70.9	39.1	56.0			
	17.5"	700c	44.4	74.0°	14.7	70.5°	54.8	28.9	6.5	46.5	4.5	7.8	107.2	74.9	38.4	57.4			
	20"	700c	50.8	73.5°	16.7	71.5°	56.4	28.9	6.5	46.5	4.5	7.1	107.4	79.1	38.8	59.7			
	22.5"	700c	57.1	73.0°	18.7	72.5°	58.1	28.9	6.5	46.5	4.5	6.5	107.5	83.5	39.2	62.0			
Verve+	16.5"	700c	42.0	71.0°	14.7	71.5°	59.7	29.2	7.0	47.5	5.5	6.3	109.6	72.8	39.5	58.7			
	18.5"	700c	47.0	70.5°	14.7	71.5°	60.3	29.2	7.0	47.5	5.5	6.3	109.6	75.5	39.5	58.7			
	21"	700c	53.4	70.0°	16.7	71.5°	61.5	29.2	7.0	47.5	5.5	6.3	110.2	79.7	39.5	60.5			
	13.5" Lowstep	700c	34.3	72.0°	14.7	71.0°	56.5	29.2	7.0	47.5	5.5	6.6	108.0	69.5	37.5	58.4			
	16.5" Lowstep	700c	42.0	71.0°	14.7	71.5°	58.7	29.2	7.0	47.5	5.5	6.3	108.6	73.0	38.5	58.7			
	18.5" Lowstep	700c	49.5	71.0°	16.7	71.5°	59.9	29.2	7.0	47.5	5.5	6.3	109.7	78.0	39.0	60.5			
UM+ LM+ TM+	50 cm	700c	50.0	70.5°	16.0	68.5°	60.1	30.1	6.2	50.2	4.5	9.5	114.8	79.1	38.3	61.6			
	55 cm	700c	55.0	70.0°	16.0	68.5°	60.7	30.1	6.2	50.2	4.5	9.5	114.8	81.9	38.3	61.6			
	60 cm	700c	60.0	70.0°	18.0	68.5°	61.9	30.1	6.2	50.2	4.5	9.5	116.0	85.5	38.8	61.6			
	45 cm Stagger	700c	45.0	71.0°	16.0	68.5°	60.1	30.1	6.2	50.2	4.5	9.5	114.2	62.1	37.7	61.6			
	50 cm Stagger	700c	50.0	70.0°	16.0	68.5°	61.1	30.1	6.2	50.2	4.5	9.5	115.2	62.2	38.7	61.6			
	55 cm Stagger	700c	55.0	70.0°	16.0	68.5°	62.1	30.1	6.2	50.2	4.5	9.5	116.2	62.4	39.7	61.6			
	45 cm Midstep	700c	45.0	71.0°	16.0	68.5°	59.0	30.1	6.2	50.2	4.5	9.5	114.3	59.8	37.8	61.6			
	50 cm Midstep	700c	50.0	70.0°	16.0	68.5°	60.4	30.1	6.2	50.2	4.5	9.5	114.5	57.5	38.0	61.6			
	55 cm Midstep	700c	55.0	70.0°	16.0	68.5°	60.7	30.1	6.2	50.2	4.5	9.5	114.8	57.8	38.3	61.6			
	45 cm Lowstep	700c	45.0	71.0°	16.0	68.5°	58.8	30.1	6.2	50.2	4.5	9.5	114.1	55.0	37.6	61.6			
	50 cm Lowstep	700c	50.0	70.0°	18.0	68.5°	60.8	30.1	6.2	50.2	4.5	9.5	115.0	53.7	37.8	63.5			
	55 cm Lowstep	700c	55.0	70.0°	18.0	68.5°	62.3	30.1	6.2	50.2	4.5	9.5	116.5	51.4	39.3	63.5			
	60 cm Lowstep	700c	60.0	70.0°	18.0	68.5°	63.7	30.1	6.2	50.2	4.5	9.5	117.9	49.3	40.7	63.5			
	X Series	50 cm	700c	50.0	73.0°	15.0	70.5°	57.6	28.9	7.0	44.5	4.5	7.9	106.8	80.1	38.5	62.3		
55 cm		700c	55.0	73.0°	17.5	71.0°	59.2	28.9	7.0	44.5	4.5	7.6	108.0	83.8	39.4	64.9			
60 cm		700c	60.0	73.0°	20.5	71.5°	61.5	28.9	7.0	44.5	4.5	7.3	109.8	87.7	40.7	68.0			
65 cm		700c	65.0	73.0°	20.5	71.5°	62.8	28.9	7.0	44.5	4.5	7.3	111.1	90.7	42.1	68.0			
45 cm Stagger		700c	45.0	73.5°	13.0	70.0°	56.0	28.9	7.0	44.5	4.5	8.3	106.3	63.2	38.2	60.2			
50 cm Stagger		700c	50.0	73.0°	15.0	70.5°	57.6	28.9	7.0	44.5	4.5	7.9	106.8	63.0	38.5	62.3			
55 cm Stagger		700c	55.0	73.0°	17.5	71.0°	59.2	28.9	7.0	44.5	4.5	7.6	108.0	64.8	39.4	64.9			
45 cm Midstep		700c	44.0	73.5°	17.5	70.0°	56.0	28.9	7.0	44.5	4.5	8.3	106.6	64.4	37.0	64.5			
50 cm Midstep		700c	50.0	73.0°	17.5	70.5°	57.6	28.9	7.0	44.5	4.5	7.9	106.9	63.9	37.8	64.7			
55 cm Midstep		700c	55.0	73.0°	20.5	71.0°	59.2	28.9	7.0	44.5	4.5	7.6	108.1	65.8	38.5	67.8			
T80		50 cm	700c	50.0	73.0°	16.0	70.5°	58.3	30.2	6.2	45.5	4.5	8.1	109.0	80.0	39.2	62.5		
	55 cm	700c	55.0	73.0°	16.0	70.5°	59.3	30.2	6.2	45.5	4.5	8.1	110.0	82.8	40.2	62.5			
	60 cm	700c	60.0	73.0°	18.0	70.5°	60.7	30.2	6.2	45.5	4.5	8.1	111.5	86.4	41.1	64.4			
	45 cm Midstep	700c	45.0	74.5°	16.0	70.5°	56.0	30.2	6.2	45.5	4.5	8.1	108.5	61.9	38.7	62.5			
	50 cm Midstep	700c	50.0	73.0°	16.0	70.5°	58.3	30.2	6.2	45.5	4.5	8.1	109.0	59.4	39.2	62.5			
	55 cm Midstep	700c	55.0	73.0°	16.0	70.5°	58.8	30.2	6.2	45.5	4.5	8.1	109.5	59.7	39.7	62.5			
	40 cm Lowstep	700c	40.0	73.0°	16.0	70.5°	57.1	27.6	5.5	45.0	4.5	6.9	107.4	55.3	39.1	59.0			
	45 cm Lowstep	700c	45.0	74.5°	16.0	70.5°	56.4	28.9	7.5	46.5	4.5	8.1	109.3	57.4	38.8	63.8			
	50 cm Lowstep	700c	50.0	73.0°	18.0	70.5°	59.6	28.9	7.5	46.5	4.5	8.1	110.8	54.9	39.5	65.7			
	55 cm Lowstep	700c	55.0	73.0°	18.0	70.5°	61.6	28.9	7.5	46.5	4.5	8.1	112.8	52.7	41.5	65.7			
	50 cm Midstep	700c	50.0	73.0°	16.0	70.5°	58.3	30.2	6.2	45.5	4.5	8.1	109.0	59.4	39.2	62.5			
	55 cm Midstep	700c	55.0	73.0°	16.0	70.5°	58.8	30.2	6.2	45.5	4.5	8.1	109.5	59.7	39.7	62.5			
	City Series	50 cm	700c	50.0	73.0°	16.0	70.5°	58.3	30.2	6.2	45.5	4.5	8.1	109.0	80.0	39.2	62.5		
		55 cm	700c	55.0	73.0°	16.0	70.5°	59.3	30.2	6.2	45.5	4.5	8.1	110.0	82.8	40.2	62.5		
60 cm		700c	60.0	73.0°	18.0	70.5°	60.7	30.2	6.2	45.5	4.5	8.1	111.5	86.4	41.1	64.4			
45 cm Midstep		700c	45.0	74.5°	16.0	70.5°	56.0	30.2	6.2	45.5	4.5	8.1	108.5	61.9	38.7	62.5			
50 cm Midstep		700c	50.0	73.0°	16.0	70.5°	58.3	30.2	6.2	45.5	4.5	8.1	109.0	59.4	39.2	62.5			

KIDS' GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
Emonda 650		26"	38.4	75.5°	11.5	71.2°	47.9		5.2		4.0	6.4	93.9	67.6	35.6	47.7		
Dual Sport Kids'		26"	32.0	74.5°	10.0	70.0°	51.5		4.5		4.5	7.0	101.7	65.0	37.7	49.9	68.5	89.0
Neko Kids'		26"	32.0	74.5°	10.0	70.0°	51.5		4.5		4.5	7.0	101.7	60.4	37.7	49.9	68.5	89.0
Fuel EX Jr		26"	31.8	71.4°	9.5	69.4°	53.5		2.0		4.0	8.4	104.5	64.9	38.1	51.9	79.5	91.0
Superfly 26		26"	32.0	74.5°	10.0	70.0°	51.5		4.5		4.1	7.4	100.8	65.2	36.2	55.3		
Superfly 24		24"	29.0	72.0°	10.5	70.0°	52.9		3.8		4.5	6.1	98.0	60.6	37.3	48.0	67.5	80.0
Superfly 20		24"	25.5	72.0°	13.5	70.0°	44.5		1.5		4.2	4.8	86.4	51.8	30.6	42.7	58.5	71.0
Precaliber 24		24"	29.0	72.0°	10.5	70.0°	52.9		3.8		4.5	6.1	98.9	61.2	48.7	37.1	64.0	80.5
Precaliber 20		20"	25.5	72.0°	10.5	70.0°	44.5		1.5		4.2	4.8	87.3	46.9	30.6	42.9	59.0	73.5
Precaliber 16		16"	20.5	70.0°	8.5	70.0°	40.0		1.0		2.0	5.2	72.2	42.9	27.5	34.2	47.5	58.0

All dimensions are in centimeters unless otherwise stated. Not all sizes are available for all models. Not all sizes are available in all markets.

\*Frame size represents fit. For seat tube length, see column A - Seat tube.

\*\*Refers to high or low setting on adjustable-geometry bikes.

CITY GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack	Seat height maximum	Seat height minimum
920	49cm	29"	44.0	74.5°	9.5	70.0°	54.0	28.3	8.5	46.5	5.5	7.5	107.2	72.2	38.5	55.6		
	52cm	29"	47.0	74.0°	10.5	70.5°	55.1	28.3	8.5	46.5	5.5	7.2	107.4	74.3	38.8	56.7		
	54cm	29"	49.0	73.8°	12.0	71.0°	56.2	28.3	8.5	46.5	5.5	6.8	107.9	76.0	39.2	58.3		
	56cm	29"	51.0	73.3°	14.5	71.3°	57.8	28.3	8.5	46.5	5.5	6.7	108.8	77.8	39.5	60.8		
	58cm	29"	53.0	73.0°	16.5	71.3°	59.4	28.3	8.5	46.5	5.5	6.7	110.0	79.6	40.2	62.7		
	61cm	29"	56.0	72.8°	18.0	71.5°	60.4	28.3	8.5	46.5	5.5	6.5	110.7	81.7	40.5	64.2		
520	48cm	700c	44.0	74.3°	11.5	69.5°	52.0	27.4	7.5	45.0	5.2	7.4	104.1	71.3	36.8	54.0		
	51cm	700c	48.2	74.0°	12.5	70.0°	53.1	27.4	7.5	45.0	5.2	7.1	104.5	74.1	37.3	55.1		
	54cm	700c	51.2	73.8°	14.0	71.0°	54.3	27.8	7.0	45.0	5.2	6.5	104.8	76.8	37.8	56.5		
	57cm	700c	54.3	73.5°	16.0	71.8°	55.7	27.8	7.0	45.0	5.2	5.9	105.2	79.4	38.3	58.7		
	60cm	700c	57.5	73.0°	20.0	71.8°	58.3	27.8	7.0	45.0	5.2	5.9	107.4	82.6	39.2	62.5		
	63cm	700c	60.5	72.8°	23.0	72.3°	60.3	27.8	7.0	45.0	5.2	5.6	108.6	85.4	40.0	65.5		
FX S 6 FX S 5 FX S 4	14"	700c	35.6	75.0°	11.0	70.0°	53.1	28.5	6.5	43.8	5.0	74.2	104.5	58.4	38.8	53.3		
	16"	700c	40.6	74.5°	13.5	70.5°	55.0	28.5	6.5	43.8	5.0	70.9	105.6	71.2	39.5	55.8		
	18"	700c	45.7	74.0°	16.0	71.0°	57.0	28.5	6.5	43.8	5.0	67.6	106.7	74.3	40.3	58.4		
	20"	700c	50.8	73.5°	18.5	71.5°	59.0	28.5	6.5	43.8	4.5	69.7	107.2	78.1	40.9	61.1		
FX 3 Disc FX 2 Disc FX 2 FX 1*	22"	700c	55.9	72.5°	21.0	72.5°	62.0	28.5	6.5	43.8	4.5	63.2	108.0	81.8	41.9	64.0		
	15"	700c	38.1	74.5°	11.5	70.5°	54.4	28.5	6.2	44.5	5.0	7.0	105.7	69.3	39.4	54.1		
	17.5"	700c	44.4	74.0°	13.0	70.5°	54.8	28.5	6.2	44.5	5.0	7.0	105.7	73.5	38.9	55.5		
	20"	700c	50.8	73.5°	16.0	71.5°	56.8	28.5	6.2	44.5	4.5	7.0	105.8	78.3	39.4	58.9		
FX FX Stagger	22.5"	700c	57.1	73.0°	19.0	72.5°	59.0	28.5	6.2	44.5	4.5	6.2	106.4	83.1	40.0	62.1		
	25"	700c	63.5	72.0°	22.0	72.5°	60.3	28.5	6.2	44.5	4.5	6.2	106.5	87.7	39.2	65.0		
	15"	700c	38.1	74.5°	11.5	70.5°	54.4	28.5	6.5	44.5	5.0	7.1	105.6	69.7	39.4	54.1		
	17.5"	700c	44.4	74.0°	13.0	70.5°	54.8	28.5	6.5	44.5	5.0	7.1	105.6	73.8	38.9	55.5		
	20"	700c	50.8	73.5°	16.0	71.5°	56.8	28.5	6.5	44.5	4.5	7.0	105.7	78.6	39.4	58.9		
	22.5"	700c	57.1	73.0°	19.0	72.5°	59.0	28.5	6.5	44.5	4.5	6.3	106.3	83.4	40.0	62.1		
	25"	700c	63.5	72.0°	22.0	72.5°	60.3	28.5	6.5	44.5	4.5	6.3	106.4	88.0	39.2	65.0		
	15" Stagger	700c	38.1	74.5°	13.0	70.5°	54.3	28.5	6.5	44.5	5.0	7.1	105.6	62.7	38.9	55.5		
FX 3 Women's Disc FX 3 Women's FX 2 Women's Disc FX 2 Women's FX 1 Stagger	17.5" Stagger	700c	44.5	74.0°	15.0	70.5°	54.8	28.5	6.2	44.5	5.0	7.0	105.7	62.4	38.9	55.5		
	20" Stagger	700c	50.8	73.5°	17.0	71.5°	56.8	28.5	6.5	44.5	4.5	7.0	105.7	63.6	39.1	59.8		
	22.5" Stagger	700c	57.2	73.0°	19.0	72.5°	58.5	28.5	6.5	44.5	4.5	6.3	106.3	64.0	40.0	62.1		
	13"	700c	33.0	75.0°	11.5	70.0°	53.0	28.5	6.2	44.5	5.0	7.3	105.3	66.6	38.6	53.9		
	15"	700c	38.1	75.0°	13.0	70.5°	53.3	28.5	6.2	44.5	5.0	7.0	105.3	69.7	38.4	55.5		
	17"	700c	43.2	74.5°	15.0	70.5°	53.9	28.5	6.2	44.5	5.0	7.0	105.5	73.2	38.0	57.4		
DS Series	19"	700c	48.3	74.0°	16.0	70.5°	55.3	28.5	6.2	44.5	5.0	7.0	106.4	76.7	38.6	58.3		
	15" Stagger	700c	38.1	74.5°	13.0	70.5°	54.3	28.5	6.2	44.5	5.0	7.0	105.6	62.4	38.9	55.5		
	17.5" Stagger	700c	44.5	74.0°	15.0	70.5°	54.8	28.5	6.2	44.5	5.0	7.0	105.7	63.0	38.3	57.4		
	20" Stagger	700c	50.8	73.5°	17.0	71.5°	56.8	28.5	6.2	44.5	4.5	7.0	105.7	63.3	39.1	59.8		
	15.5"	700c	36.6	74.5°	11.4	70.0°	57.5	29.4	6.0	45.5	3.8	8.5	109.1	73.8	41.0	59.5		
	17.5"	700c	41.7	74.0°	12.4	71.0°	59.0	29.4	6.0	45.5	3.8	8.2	109.5	76.1	41.6	60.6		
Neko	19"	700c	46.7	73.5°	13.4	71.0°	60.5	29.4	6.0	45.5	3.8	8.2	110.5	79.1	42.3	61.6		
	21"	700c	50.5	73.0°	14.4	71.5°	62.0	29.4	6.0	45.5	3.8	7.8	111.0	81.5	42.8	62.7		
	22.5"	700c	54.3	72.5°	15.4	72.0°	63.5	29.4	6.0	45.5	3.8	7.5	111.2	84.1	43.4	63.9		
	14"	700c	33.8	74.5°	11.4	70.0°	55.0	29.4	6.0	45.5	3.8	8.9	107.0	69.4	38.1	59.3		
	16"	700c	38.2	74.0°	11.4	70.5°	56.0	29.4	6.0	45.5	3.8	8.5	107.0	71.6	39.0	59.5		
	18"	700c	43.3	73.5°	12.4	71.0°	57.5	29.4	6.0	45.5	3.8	8.2	107.5	74.5	39.6	60.6		
CrossRip	14" Stagger	700c	35.6	74.5°	13.4	70.0°	55.0	29.4	6.0	45.5	3.8	8.9	107.0	62.2	37.5	61.1		
	16" Stagger	700c	38.2	74.0°	13.4	70.5°	56.0	29.4	6.0	45.5	3.8	8.5	107.0	62.2	38.4	61.4		
	18" Stagger	700c	43.3	73.5°	14.4	71.0°	57.5	29.4	6.0	45.5	3.8	8.2	107.6	62.2	39.0	62.5		
	49cm	700c	49.0	75.0°	11.5	69.9°	52.2	27.7	7.4	43.5	5.0	7.6	103.1	73.9	37.6	53.6		
	52cm	700c	52.0	74.0°	12.1	70.5°	52.4	27.7	7.4	43.5	5.0	7.2	103.7	75.6	38.7	56.0		
	54cm	700c	54.0	73.5°	14.3	70.5°	55.4	27.7	7.4	43.5	5.0	7.2	104.3	77.5	39.6	58.2		
Zektor	56cm	700c	56.0	73.0°	16.0	71.0°	57.0	28.1	7.0	43.5	5.0	6.9	105.1	79.4	40.2	59.6		
	58cm	700c	58.0	73.0°	17.3	71.5°	57.8	28.1	7.0	43.5	5.0	6.9	105.4	81.0	40.6	61.1		
	61cm	700c	61.0	72.5°	19.3	71.5°	59.4	28.1	7.0	43.5	5.0	6.6	106.5	83.4	41.0	63.0		
	50cm	700c	50.0	74.5°	12.3	72.0°	52.6	29.4	6.5	43.7	5.0	6.4	101.6	77.8	37.5	54.3		
	53cm	700c	53.0	74.0°	14.3	72.0°	54.0	29.4	6.5	43.7	5.0	6.4	102.5	80.1	37.8	56.2		
	56cm	700c	56.0	73.5°	16.3	72.0°	56.0	29.4	6.5	43.7	5.0	6.4	104.0	82.4	38.7	58.1		
	61cm	700c	61.0	72.5°	20.3	72.0°	59.5	29.4	6.5	43.7	5.0	6.4	106.5	86.8	40.0	61.9		
	50cm Stagger	700c	50.0	74.5°	12.0	72.0°	52.5	29.4	6.5	43.7	5.0	6.4	101.5	62.7	37.5	54.0		
Super Commuter+	53cm Stagger	700c	53.0	74.0°	14.0	72.0°	53.9	29.4	6.5	43.7	5.0	6.4	102.4	62.0	37.8	55.9		
	56cm Stagger	700c	56.0	73.5°	16.0	72.0°	55.9	29.4	6.5	43.7	5.0	6.4	103.9	60.8	38.7	57.8		
	45cm	27.5"	40.0	73.0°	13.0	69.0°	55.9	29.9	6.0	47.0	4.5	8.9	109.6	75.6	38.0	58.6		
	50cm	27.5"	45.0	73.0°	15.0	69.5°	57.4	29.9	6.0	47.0	4.5	8.6	110.7	78.9	38.8	60.7		
	55cm	27.5"	50.0	73.0°	17.5	70.0°	59.0	29.9	6.0	47.0	4.5	8.3	111.9	81.6	39.7	63.3		
Dual Sport+	60cm	27.5"	55.0	73.0°	20.5	70.5°	61.3	29.9	6.0	47.0	4.5	7.9	113.8	85.1	41.0	66.3		
	15"	700c	49	75.0°	11.5	70.0°	52.1	28.5	7.0	47.2	5.0	7.7	106.9	74.2	37.6	54.2		
	17.5"	700c	52	74.0°	12.1	70.5°	54.3											