




GEOMETRY GLOSSARY /

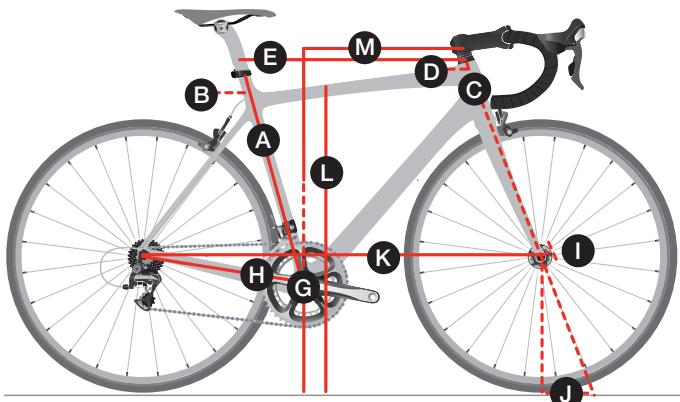

ROAD /

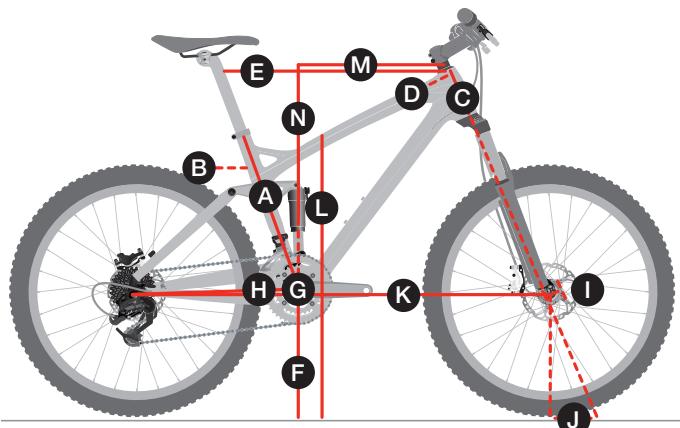

MOUNTAIN /

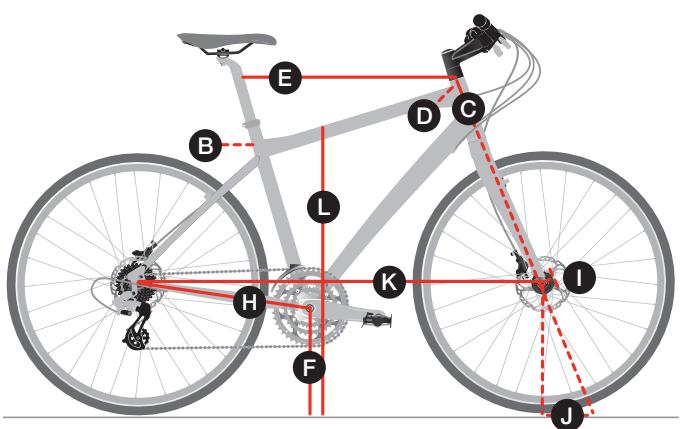


TOWN /

A	Seat tube	The distance from the center of the bottom bracket to the top of the seat tube.
B	Seat tube angle	The angle of seat tube to the ground. Tailored to optimize power transmission on each frame size.
C	Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.
D	Head angle	The angle of head tube to the ground. Tailored to optimize steering precision on each frame size.
E	Effective top tube	The horizontal measure from the center of the headset to the center of the seatpost. The most important measurement when buying a bike, because it cannot be changed.
F	Bottom bracket height	The vertical distance from the center of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.
G	Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's center of gravity.
H	Chainstay length	The distance from the center of the bottom bracket to the center of the rear axle.
I	Offset	The perpendicular distance from the steering axis to the center of the front wheel.
J	Trail	The distance the front wheel's contact patch lags behind the steering axis.
K	Wheelbase	The distance between the axles. Tailored to optimize weight distribution on each frame size.
L	Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 8.25" in front of seat tube.
M	Frame reach	The horizontal distance from the bottom bracket center to the top of the head tube centerline.
N	Frame stack	The vertical distance from the bottom bracket center to the top of the head tube centerline.

Notes

All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tires as well as different fork lengths will change the dimensions in these charts.



Models	Frame size*	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	Frame rise	Seat height maximum	Seat height minimum
H1 fit Madone 7 Series Madone 6 Series	50cm	45.3	74.6°	10.0	72.8°	52.8	7.2	40.7	4.5	5.8	97.1	70.6	38.8	50.9	72.5	62.5
	52cm	48.3	74.2°	11.0	73.0°	53.9	7.2	40.7	4.5	5.6	97.6	72.7	39.2	51.9	75.5	65.5
	54cm	50.1	73.7°	12.5	73.0°	55.1	7.0	40.7	4.5	5.6	98.5	74.3	39.6	53.1	78.0	68.0
	56cm	52.5	73.3°	14.0	73.0°	56.4	7.0	40.7	4.5	5.6	99.3	76.2	40.0	54.6	81.0	71.0
	58cm	55.3	73.0°	16.0	73.8°	57.9	7.0	40.7	4.0	5.7	99.2	78.6	40.5	56.9	83.0	73.0
	60cm	57.3	72.8°	18.0	73.9°	59.1	6.8	41.0	4.0	5.6	100.5	80.6	40.9	58.6	85.0	75.0
	62cm	59.3	72.5°	20.0	73.9°	60.3	6.8	41.0	4.0	5.6	101.4	82.4	41.3	60.6	87.0	77.0
	62cm	59.3	72.5°	20.0	73.9°	60.3	6.8	41.0	4.0	5.6	101.4	82.4	41.3	60.6	90.0	80.0
H2 fit Madone 7 Series & WSD Madone 6 Series & WSD Madone 5 Series & WSD Madone 4 Series Madone 3 Series Madone 2 Series 1 Series	47cm	44.4	74.6°	12.0	71.2°	51.3	7.2	40.7	4.5	6.8	97.1	71.1	36.9	52.2	69.5	59.5
	50cm	47.6	74.6°	13.0	72.1°	52.1	7.2	40.7	4.5	6.2	97.1	73.3	37.4	53.5	72.5	62.5
	52cm	49.3	74.2°	14.0	72.8°	53.4	7.2	40.7	4.5	5.8	97.3	74.7	37.9	54.7	75.5	65.5
	54cm	50.6	73.7°	15.0	73.0°	54.3	7.0	40.7	4.5	5.6	97.8	75.8	38.1	55.5	78.0	68.0
	56cm	53.3	73.3°	17.0	73.5°	56.0	7.0	40.7	4.0	5.8	98.0	78.1	38.7	57.7	81.0	71.0
	58cm	55.3	73.0°	19.0	73.8°	57.4	7.0	40.7	4.0	5.7	98.7	80.0	39.1	59.8	83.0	73.0
	60cm	57.3	72.8°	21.0	73.9°	58.6	6.8	41.0	4.0	5.6	100.0	81.9	39.5	61.5	85.0	75.0
	62cm	59.3	72.5°	23.0	73.9°	59.8	6.8	41.0	4.0	5.6	100.8	83.7	39.8	63.4	87.0	77.0
H3 WSD fit Madone 4 Series WSD Madone 3 Series WSD Lexa SL Lexa S Lexa	43cm	38.8	75.5°	13.0	70.0°	48.0	5.1	41.0	5.0	6.2	97.1	66.4	35.5	48.1		
	44cm	40.8	74.6°	11.0	70.0°	49.9	7.2	41.0	5.0	6.9	97.5	68.5	36.0	50.7		
	47cm	42.8	74.6°	12.5	71.0°	50.9	7.2	41.0	5.0	6.3	97.6	70.2	36.4	52.5		
	50cm	45.9	74.6°	14.0	71.9°	51.7	7.2	41.0	5.0	5.7	97.7	72.6	36.8	54.2		
	52cm	49.0	74.2°	15.5	72.1°	52.9	7.2	41.0	4.5	6.1	97.9	74.8	37.1	55.9		
	54cm	51.5	73.7°	17.0	72.6°	54.1	7.0	41.0	4.5	5.8	98.3	77.0	37.4	57.3		
	56cm	54.6	73.3°	18.5	73.3°	55.4	7.0	41.0	4.0	5.9	97.9	79.3	37.7	59.1		
	58cm	56.6	73.0°	21.0	73.8°	56.9	6.8	41.1	4.0	5.6	98.7	81.5	38.1	61.5		
	60cm	58.6	72.8°	23.0	73.9°	58.1	6.8	41.1	4.0	5.6	99.5	83.3	38.4	63.4		
	62cm	60.6	72.5°	25.0	73.9°	59.3	6.8	41.2	4.0	5.5	100.4	85.1	38.7	65.4		
Endurance fit Domane 6 Series & WSD Domane 5 Series & WSD Domane 4 Series & WSD Domane 2 Series Lexa SLX	44cm	39.0	74.6°	9.5	70.3°	50.1	8.0	42.0	5.3	6.6	98.3	65.7	36.0	51.0	65.5	55.5
	47cm	42.0	74.6°	11.0	71.0°	50.9	8.0	42.0	5.3	6.1	98.6	68.6	36.4	52.7	69.5	59.5
	50cm	45.0	74.6°	13.0	71.9°	51.9	8.0	42.0	5.3	6.0	99.6	71.6	36.8	54.6	72.5	62.5
	52cm	47.5	74.2°	14.5	71.3°	53.0	8.0	42.0	5.3	5.9	100.3	73.5	37.1	56.1	75.5	65.5
	54cm	50.0	73.7°	16.0	71.3°	54.2	8.0	42.0	5.3	5.9	101.0	75.4	37.4	57.5	78.0	68.0
	56cm	52.5	73.3°	17.5	71.9°	55.4	7.8	42.0	4.8	6.1	100.8	77.6	37.7	59.1	81.0	71.0
	58cm	54.8	73.0°	19.5	72.8°	56.7	7.8	42.5	4.8	6.0	102.2	79.6	38.0	61.1	83.0	73.0
	60cm	56.7	72.8°	22.0	72.1°	57.9	7.5	42.5	4.8	5.9	103.2	81.7	38.3	63.2	85.0	75.0
	62cm	58.6	72.5°	24.5	72.1°	59.3	7.5	42.5	4.8	5.9	104.2	83.5	38.6	65.6	87.0	77.0
Speed Concept 9 Series Speed Concept 7 Series	X5**	47.8	78.0°	9.0	72.0°	46.9	5.5	37.4	4.0	6.0	91.6	72.6	37.0	46.8	76.6	56.4
	SM	50.3	78.0°	6.5	72.2°	49.5	8.0	40.0	4.5	6.1	96.1	75.0	39.0	49.2	79.1	58.9
	MD	52.9	78.0°	9.0	72.5°	51.8	8.0	40.0	4.5	6.0	98.5	77.5	40.8	51.7	81.7	61.5
	LG	55.3	78.0°	11.5	72.5°	54.1	8.0	40.0	4.5	6.0	101.0	79.9	42.6	54.1	84.1	63.9
	XL	57.8	78.0°	14.0	72.5°	56.5	8.0	40.0	4.5	6.0	103.7	82.3	44.5	56.5	86.6	66.4
Cronus	50cm	50.6	74.2°	10.5	72.0°	50.9	6.4	43.0	4.5	6.8	98.2	76.0	35.9	52.7		
	52cm	52.9	73.9°	12.6	72.0°	52.4	6.4	43.0	4.5	6.8	99.6	78.0	36.6	54.7		
	54cm	54.8	73.6°	14.5	72.0°	53.7	6.2	43.0	4.5	6.8	100.7	79.9	37.2	56.3		
	56cm	57.2	73.4°	16.7	72.0°	55.3	6.2	43.0	4.5	6.8	102.0	82.1	37.8	58.4		
	58cm	59.5	73.1°	19.3	72.0°	56.8	6.2	43.0	4.5	6.8	103.3	84.3	38.3	60.6		
	61cm	62.1	72.7°	21.9	72.0°	59.0	6.2	43.0	4.5	6.8	105.0	86.6	39.3	63.1		
Crockett	50cm	47.6	75.0°	11.0	71.0°	51.8	7.0	42.5	4.5	7.4	100.1	74.7	37.5	53.4		
	52cm	49.3	74.5°	12.3	71.5°	53.1	7.0	42.5	4.5	7.1	100.5	76.1	37.9	54.7		
	54cm	51.3	74.0°	13.8	72.0°	54.4	6.8	42.5	4.5	6.7	101.0	77.9	38.3	56.2		
	56cm	53.3	73.6°	15.7	72.0°	55.8	6.8	42.5	4.5	6.7	102.0	79.6	38.7	58.0		
	58cm	55.3	73.3°	17.6	72.3°	57.0	6.5	42.5	4.5	6.6	102.8	81.6	39.1	59.7		
	61cm	58.3	73.0°	20.5	72.3°	58.8	6.5	42.5	4.5	6.6	104.3	84.3	39.7	62.4		
CrossRip	49cm	50.0	74.5°	10.5	70.6°	52.5	7.4	43.5	4.5	7.6	101.5	73.1	37.6	53.6		
	52cm	52.0	74.0°	12.8	71.2°	54.8	7.4	43.5	4.5	7.2	102.9	75.3	38.7	56.0		
	54cm	54.0	73.5°	15.0	71.5°	56.9	7.4	43.5	4.5	7.0	104.2	76.7	39.6	58.2		
	56cm	56.0	73.0°	16.7	72.0°	58.4	7.0	43.5	4.5	6.7	105.0	78.7	40.2	59.6		
	58cm	58.0	73.0°	18.0	72.5°	59.3	7.0	43.5	4.5	6.4	105.3	80.1	40.6	61.1		
	61cm	61.0	72.5°	20.0	72.5°	60.9	7.0	43.5	4.5	6.4	106.3	82.6	41.0	63.0		
520	48cm	44.0	74.3°	9.5	69.5°	52.2	7.5	45.0	5.2	7.4	104.1	71.5	37.2	53.0		
	51cm	48.2	74.0°	10.5	70.0°	53.3	7.5	45.0	5.2	7.1	104.5	73.6	37.7	54.1		
	54cm	51.2	73.8°	12.0	71.0°	54.4	7.0	45.0	5.2	6.5	104.8	76.3	38.2	55.4		
	57cm	54.3	73.5°	14.0	71.8°	55.8	7.0	45.0	5.2	5.9	105.2	78.9	38.7	57.6		
	60cm	57.5	73.0°	18.0	71.8°	58.4	7.0	45.0	5.2	5.9	107.4	82.0	39.6	61.4		

All dimensions are in centimeters unless otherwise stated.


Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**650 wheel size

Models	Frame size*	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	Frame rise
Fuel EX 29	15.5"	39.4	73.6 °	10.5	69.5 °	56.7	33.8	3.2	45.2	5.1	8.4	110.8	77.9	39.0	60.1
	17.5"	42.0	73.6 °	10.5	69.5 °	59.8	33.8	3.2	45.2	5.1	8.4	113.9	76.5	42.1	60.1
	18.5"	44.5	73.6 °	11.5	69.5 °	61.2	33.8	3.2	45.2	5.1	8.4	115.4	77.3	43.2	61.1
	19.5"	47.0	73.6 °	11.5	69.5 °	62.7	33.8	3.2	45.2	5.1	8.4	116.9	76.8	44.7	61.1
	21.5"	50.8	73.6 °	13.0	69.5 °	65.0	33.8	3.2	45.2	5.1	8.4	119.3	77.0	46.6	62.5
Fuel EX 26	23"	55.9	73.6 °	14.5	69.5 °	66.3	33.8	3.2	45.2	5.1	8.4	120.7	78.8	47.5	63.9
	15.5"	36.7	73.0 °	10.8	68.0 °	54.8	33.8	0.5	42.5	4.0	9.1	107.2	74.5	38.1	54.6
	17.5"	41.9	73.0 °	12.2	68.0 °	58.5	33.8	0.5	42.5	4.0	9.1	111.0	73.0	41.4	55.9
	18.5"	44.5	73.0 °	13.2	68.0 °	60.5	33.8	0.5	42.5	4.0	9.1	113.1	73.0	43.1	56.8
	19.5"	47.0	73.0 °	14.0	68.0 °	62.2	33.8	0.5	42.5	4.0	9.1	114.9	74.0	44.6	57.5
Lush 29 Women's	21.5"	50.8	73.0 °	15.7	68.0 °	64.8	33.8	0.5	42.5	4.0	9.1	117.6	74.2	46.7	59.1
	14"	35.6	74.0 °	9.5	69.0 °	54.2	33.5	3.5	45.2	5.1	8.7	109.1	71.9	37.2	59.3
	15.5"	36.8	74.0 °	9.5	69.0 °	56.3	33.5	3.5	45.2	5.1	8.7	112.0	70.8	39.3	59.3
	17"	40.6	74.0 °	9.5	69.0 °	58.3	33.5	3.5	45.2	5.1	8.7	113.2	69.9	41.3	59.3
	18.5"	44.5	74.0 °	9.5	69.0 °	60.5	33.5	3.5	45.2	5.1	8.7	115.4	69.6	43.5	59.3
Remedy Carbon 27.5/650b Low geometry**	15.5"	39.4	67.5 °	10.0	67.5 °	54.9	33.8	1.5	43.5	4.3	10.0	109.8	77.2	36.6	59.3
	17.5"	41.9	67.5 °	10.0	67.5 °	58.2	33.8	1.5	43.5	4.3	10.0	113.1	75.8	39.4	69.4
	18.5"	44.5	67.5 °	10.5	67.5 °	60.1	33.8	1.5	43.5	4.3	10.0	115.1	74.4	41.7	69.9
	19.5"	47.0	67.5 °	11.0	67.5 °	61.8	33.8	1.5	43.5	4.3	10.0	116.7	74.2	43.2	60.4
	21.5"	50.8	67.5 °	12.5	67.5 °	64.6	33.8	1.5	43.5	4.3	10.0	119.6	73.9	45.5	61.8
Remedy Carbon 27.5/650b High geometry**	15.5"	39.4	68.2 °	10.0	68.2 °	54.6	34.6	0.7	43.3	4.3	9.5	109.7	77.9	37.3	58.9
	17.5"	41.9	68.2 °	10.0	68.2 °	57.9	34.6	0.7	43.3	4.3	9.5	113.0	76.5	40.6	58.9
	18.5"	44.5	68.1 °	10.5	68.1 °	59.8	34.6	0.7	43.3	4.3	9.5	114.9	75.1	42.4	59.4
	19.5"	47.0	68.1 °	11.0	68.1 °	61.5	34.6	0.7	43.3	4.3	9.5	116.6	74.9	43.9	59.9
	21.5"	50.8	68.1 °	12.5	68.1 °	64.3	34.6	0.7	43.3	4.3	9.5	119.3	74.6	46.1	61.3
Remedy AL 27.5/650b Low geometry**	15.5"	39.4	67.5 °	10.0	67.5 °	54.9	33.8	1.5	43.5	4.3	10.0	109.8	77.6	36.6	59.3
	17.5"	41.9	67.5 °	10.0	67.5 °	58.2	33.8	1.5	43.5	4.3	10.0	113.1	75.8	39.4	69.4
	18.5"	44.5	67.5 °	10.5	67.5 °	60.1	33.8	1.5	43.5	4.3	10.0	115.1	74.4	41.7	69.9
	19.5"	47.0	67.5 °	11.0	67.5 °	61.8	33.8	1.5	43.5	4.3	10.0	116.7	74.0	43.2	60.4
	21.5"	50.8	67.5 °	12.5	67.5 °	64.6	33.8	1.5	43.5	4.3	10.0	119.6	74.5	45.5	61.8
Remedy AL 27.5/650b High geometry**	15.5"	39.4	68.2 °	10.0	68.2 °	54.6	34.6	0.7	43.3	4.3	9.5	109.7	78.2	37.3	58.9
	17.5"	41.9	68.2 °	10.0	68.2 °	57.9	34.6	0.7	43.3	4.3	9.5	113.0	76.5	40.6	58.9
	18.5"	44.5	68.1 °	10.5	68.1 °	59.8	34.6	0.7	43.3	4.3	9.5	114.9	75.1	42.4	59.4
	19.5"	47.0	68.1 °	11.0	68.1 °	61.5	34.6	0.7	43.3	4.3	9.5	116.6	74.7	43.9	59.9
	21.5"	50.8	68.1 °	12.5	68.1 °	64.3	34.6	0.7	43.3	4.3	9.5	119.3	75.3	46.1	61.3
Remedy 29 Low geometry**	15.5"	39.4	68.0 °	10.0	67.5 °	54.6	35.0	2.0	44.5	5.1	9.8	112.8	77.9	38.5	60.6
	17.5"	41.9	68.0 °	10.0	67.5 °	57.6	35.0	2.0	44.5	5.1	9.8	115.8	76.5	41.5	60.6
	19"	45.7	68.0 °	10.5	67.5 °	59.7	35.0	2.0	44.5	5.1	9.8	117.9	76.8	43.4	61.1
	21"	50.8	68.0 °	11.0	67.5 °	61.8	35.0	2.0	44.5	5.1	9.8	120.0	78.1	45.1	62.0
	23"	55.9	68.0 °	12.5	67.5 °	63.9	35.0	2.0	44.5	5.1	9.8	122.1	81.8	46.9	62.9
Remedy 29 High geometry**	15.5"	39.4	68.0 °	10.0	68.2 °	54.6	34.6	0.7	43.3	4.3	9.5	109.7	78.2	37.3	58.9
	17.5"	41.9	68.2 °	10.0	68.2 °	57.9	34.6	0.7	43.3	4.3	9.5	113.0	76.5	40.6	58.9
	18.5"	44.5	68.1 °	10.5	68.1 °	59.8	34.6	0.7	43.3	4.3	9.5	114.9	75.1	42.4	59.4
	19.5"	47.0	68.1 °	11.0	68.1 °	61.5	34.6	0.7	43.3	4.3	9.5	116.6	74.7	43.9	59.9
	21.5"	50.8	68.1 °	12.5	68.1 °	64.3	34.6	0.7	43.3	4.3	9.5	119.3	75.3	46.1	61.3
Remedy 29 Low geometry**	15.5"	39.4	68.0 °	10.0	67.5 °	54.6	35.0	2.0	44.5	5.1	9.8	112.8	77.9	38.5	60.6
	17.5"	41.9	68.0 °	10.0	67.5 °	57.6	35.0	2.0	44.5	5.1	9.8	115.8	76.5	41.5	60.6
	19"	45.7	68.0 °	10.5	67.5 °	59.7	35.0	2.0	44.5	5.1	9.8	117.9	76.8	43.4	61.1
	21"	50.8	68.0 °	11.0	67.5 °	61.8	35.0	2.0	44.5	5.1	9.8	120.0	78.1	45.1	62.0
	23"	55.9	68.0 °	12.5	67.5 °	63.9	35.0	2.0	44.5	5.1	9.8	122.1	81.8	46.9	62.9
Remedy 29 High geometry**	15.5"	39.4	69.0 °	10.0	68.2 °	54.4	35.9	2.0	44.3	5.1	9.3	112.7	76.9	39.3	60.6
	17.5"	41.9	69.0 °	10.0	68.2 °	57.4	35.9	2.0	44.3	5.1	9.3	115.7	75.5	42.3	60.6
	19"	45.7	69.0 °	10.5	68.2 °	59.7	35.9	2.0	44.3	5.1	9.3	117.7	75.8	44.1	61.1
	21"	50.8	69.0 °	11.0	68.2 °	61.5	35.9	2.0	44.3	5.1	9.3	119.8	77.1	45.9	62.0
	23"	55.9	69.0 °	12.5	68.2 °	63.6	35.9	2.0	44.3	5.1	9.3	121.9	80.8	47.6	62.9
Slash Low geometry**	15.5"	39.4	66.5 °	10.0	65.0 °	55.7	35.0	0.6	43.5	4.4	11.7	114.9	79.5	39.7	58.1
	17.5"	41.9	66.5 °	10.0	65.0 °	58.7	35.0	0.6	43.5	4.4	11.7	117.9	77.7	42.7	58.1
	18.5"	44.5	66.5 °	10.0	65.0 °	60.0	35.0	0.6	43.5	4.4	11.7	119.2	76.2	44.0	58.1
	19.5"	47.0	66.5 °	11.0	65.0 °	61.4	35.0	0.6	43.5	4.4	11.7	120.5	75.6	45.0	59.0
	21.5"	52.1	66.5 °	12.0	65.0 °	64.2	35.0	0.6	43.5	4.4	11.7	123.4	74.5	47.4	59.9
Slash High geometry**	15.5"	39.4	67.2 °	10.0	65.7 °	55.5	35.8	-0.2	43.3	4.4	11.7	114.7	80.2	40.4	57.6
	17.5"	41.9	67.1 °	10.0	65.6 °	58.5	35.8	-0.2	43.3	4.4	11.7	117.7	78.4	43.4	57.6
	18.5"	44.5	67.1 °	10.0	65.6 °	59.8	35.8	-0.2	43.3	4.4	11.7	119.0	76.9	44.7	57.6
	19.5"	47.0	67.1 °	11.0	65.6 °	61.1	35.9	-0.3	43.3	4.4	11.7	120.4	76.4	45.6	58.5
	21.5"	52.1	67.1 °	12.0	65.6 °	64.5	35.9	-0.3	43.3	4.4	11.7	123.2	75.3	48.0	59.4
Session Low geometry**	S	41.3	57.0 °	12.0	63.6 °	57.3	35.6	1.3	44.1	4.5	12.0	116.9	78.0	37.9	60.2
	M	44.0	57.0 °	12.5	63.6 °	58.8	35.6	1.3	44.1	4.5	12.0	118.4	78.0	39.4	60.6
	L	44.0	57.0 °	12.5	63.6 °	61.3	35.6	1.3	44.1	4.5	12.0	120.9	77.2	41.9	60.6
	XL	48.7	57.0 °	12.5	63.6 °	63.4	35.6	1.3	44.1	4.5	12.0	123.0	76.8	44.0	60.6
	S	41.3	57.6 °	12.0	64.2 °	56.6	36.0	2.1	43.9	4.5	11.9	116.6	78.0	38.3	60.5
Session High geometry**	M	44.0	57.6 °	12.5	64.2 °	58.2	36.0	2.1	43.9	4.5	11.9	118.1	78.0	39.8	60.9
	L	44.0	57.6 °	12.5	64.2 °	60.7	36.0	2.1	43.9	4.5	11.9	120.6	78.0	42.3	60.9
	XL	48.7	57.6 °	12.5	64.2 °	62.7	36.0	2.1	43.9	4.5	11.9	122.7	78.0	44.4	60.9
	Ticket S Frameset	Long</td													




Models	Frame size*														
	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	Frame rise	
Superfly Carbon SL	15.5"	36.8	73.0°	10.3	69.3°	57.0	31.6	5.3	44.5	5.1	8.5	109.0	74.8	38.6	60.2
	17.5"	41.6	72.5°	10.3	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.9	41.2	60.2
	19"	45.7	72.0°	10.3	69.6°	62.2	31.6	5.3	44.5	5.1	8.3	112.7	78.9	42.6	60.3
	21"	50.8	72.0°	11.8	69.6°	64.3	31.6	5.3	44.5	5.1	8.3	114.8	82.2	44.2	61.7
	23"	54.5	72.0°	11.8	69.6°	66.3	31.6	5.3	44.5	5.1	8.3	116.9	84.4	46.2	61.7
	15.5"	36.8	73.0°	10.0	69.3°	57.0	31.1	5.8	43.5	5.1	8.5	107.7	74.7	38.6	60.0
Superfly Carbon	17.5"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.7	41.2	60.0
	18.5"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.9	42.7	60.1
	19.5"	47.0	72.0°	10.0	69.6°	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.2	44.3	60.1
	21.5"	52.1	72.0°	12.0	69.6°	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.9	45.7	61.9
	23"	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.7	47.1	61.9
	15.5"	36.8	73.0°	10.0	69.3°	57.0	31.1	5.8	43.5	5.1	8.5	107.7	74.7	38.6	60.0
Superfly AL	17.5"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
	18.5"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	19.5"	47.0	72.0°	10.0	69.6°	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.5	44.3	60.1
	21.5"	52.1	72.0°	12.0	69.6°	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.3	45.7	61.9
	23"	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.7	47.1	61.9
	14.5"	34.3	74.0°	10.0	69.0°	54.0	31.1	5.8	44.5	5.1	8.7	107.0	66.0	37.2	58.5
X-Caliber 29	15.5"	36.8	73.0°	10.0	69.3°	57.0	31.6	5.3	44.5	5.1	8.5	109.0	74.5	38.7	60.0
	17.5"	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
	21.5"	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	55.9	72.0°	12.0	69.6°	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
Rig	15.5"	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	75.4	38.6	60.2
	17.5"	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	77.5	41.2	60.2
	19"	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	79.5	42.6	60.3
	21"	53.3	72.0°	11.8	69.6°	64.3	31.2	5.3	44.5	5.1	8.1	114.8	82.8	44.2	61.7
	23"	58.4	72.0°	11.8	69.6°	66.3	31.2	5.3	44.5	5.1	8.1	116.9	85.9	46.2	61.7
	14"	33.0	71.8°	9.3	69.0°	53.9	31.1	43.5	5.1	8.7	105.0	65.7	36.6	57.6	
Cali Carbon	15.5"	36.8	71.8°	9.3	69.0°	56.8	31.1	43.5	5.1	8.7	108.0	66.2	38.8	59.5	
	17"	40.6	71.8°	10.0	69.0°	58.8	31.1	43.5	5.1	8.7	110.0	67.2	40.6	60.2	
	18.5"	44.5	71.8°	10.0	69.0°	61.0	31.1	43.5	5.1	8.7	112.0	68.7	42.8	60.2	
	20"	47.0	73.0°	10.0	69.0°	64.2	31.2	44.5	5.1	8.5	106.3	65.8	36.5	57.9	
	21.5"	52.1	73.0°	10.0	69.0°	66.2	31.2	44.5	5.1	8.5	111.3	66.9	40.7	59.8	
	23"	55.9	73.0°	10.0	69.0°	68.6	31.2	44.5	5.1	8.5	113.5	68.5	42.9	59.8	
Cali AL	14"	33.0	73.0°	10.0	69.0°	54.2	31.2	44.5	5.1	8.5	106.3	65.8	36.5	57.9	
	15.5"	36.8	73.0°	10.0	69.0°	57.0	31.2	44.5	5.1	8.5	109.3	65.8	38.7	59.8	
	17"	40.6	73.0°	10.0	69.0°	59.0	31.2	44.5	5.1	8.5	111.3	66.9	40.7	59.8	
	18.5"	44.5	73.0°	10.0	69.0°	61.2	31.2	44.5	5.1	8.5	113.5	68.5	42.9	59.8	
	20"	47.0	73.0°	10.0	69.0°	64.2	31.2	44.5	5.1	8.5	116.0	70.7	43.0	60.2	
	21.5"	52.1	73.0°	12.0	70.0°	64.3	31.3	5.5	44.0	4.6	8.5	105.1	75.7	37.2	59.5
Stache	14.5"	34.3	73.0°	10.0	70.0°	55.4	31.3	5.5	44.0	4.6	8.5	105.1	75.7	37.2	59.5
	15.5"	36.8	73.0°	10.3	68.3°	60.0	31.6	44.5	5.1	9.2	110.2	76.0	38.8	61.0	
	17.5"	41.9	72.5°	10.3	68.3°	62.0	31.6	44.5	5.1	9.0	113.9	79.4	42.7	61.1	
	19"	45.7	72.0°	10.3	68.6°	64.0	31.6	44.5	5.1	9.0	116.1	82.4	44.3	62.5	
	21"	50.8	72.0°	11.8	68.6°	66.1	31.6	44.5	5.1	9.0	118.1	84.4	46.4	62.5	
	23"	54.5	72.0°	11.8	68.6°	68.6	31.6	44.5	5.1	9.0	120.2	86.4	48.4	62.5	
Farley	14.5"	34.3	73.0°	10.0	70.0°	55.4	31.3	5.5	44.0	4.6	8.5	105.1	75.7	37.2	59.5
	15.5"	36.8	73.0°	10.0	70.0°	56.6	31.3	5.5	44.0	4.6	8.5	106.3	77.0	38.4	59.5
	17.5"	41.9	73.0°	10.0	70.0°	59.3	31.3	5.5	44.0	4.6	8.5	109.0	78.2	41.1	59.5
	19.5"	47.0	73.0°	12.0	70.0°	63.0	31.3	5.5	44.0	4.6	8.5	112.8	81.7	44.2	61.3
	21.5"	52.1	73.0°	12.0	70.0°	64.3	31.3	5.5	44.0	4.6	8.5	114.1	83.2	45.5	61.3
	23"	55.9	73.0°	12.0	70.0°	67.3	31.3	5.5	44.0	4.6	8.5	116.9	85.9	46.2	61.3
3 Series 820	13"	33.0	74.0°	11.0	70.5°	52.4	28.7	43.0	4.0	7.6	101.9	70.5	38.6	60.2	
	16"	40.6	73.5°	11.0	70.5°	55.0	29.1	43.0	4.0	7.6	104.0	73.8			
	18"	45.7	73.5°	13.0	70.5°	56.5	29.3	43.0	4.0	7.6	105.7	77.2			
	19.5"	49.5	73.0°	15.0	70.5°	58.0	29.3	43.0	4.0	7.6	106.8	79.9			
	21"	53.3	73.0°	17.0	70.5°	59.0	29.3	43.0	4.0	7.6	107.9	82.7			
	22.5"	57.2	72.5°	19.0	70.5°	60.0	29.5	43.0	4.0	7.6	108.4	85.7			
Skye SL	13"	35.6	75.0°	11.0	69.5°	51.5	28.9	42.4	4.0	8.2	102.3	71.3			
	16"	40.7	74.0°	11.0	70.0°	53.4	28.9	42.4	4.0	7.9	102.7	74.3			
	19.5"	45.7	73.5°	11.0	70.0°	56.5	29.3	42.4	4.0	7.9	105.5	76.7			
	20"	47.0	74.0°	11.0	70.5°	52.4	28.7	43.0	4.0	7.6	101.9	65.5			
	21.5"	53.3	74.0°	11.0	70.5°	54.6	29.1	43.0	4.0	7.6	103.6	63.1			
	23"	59.4	74.0°	17.0	70.5°	57.5	29.3	43.0	4.0	7.6	106.4	62.5			
Skye S	13"	33.0	74.0°	11.0	70.5°	52.4	28.7	43.0	4.0	7.6	101.9	65.5			
	16"	40.6	73.5°	11.0	70.5°	54.6	29.1	43.0	4.0	7.6	103.6	63.1			
	19.5"	49.5	73.0°	17.0	70.5°	57.5	29.3	43.0	4.0	7.6	106.4	62.5			
	20"	47.0	74.0°	11.0	70.5°	52.4	28.7	43.0	4.0	7.6	101.9	65.5			
	21.5"	53.3	74.0°	11.0	70.5°	54.6	29.1	43.0	4.0	7.6	103.6	63.1			
	23"	59.4	74.0°	17.0	70.5°	57.5	29.3	43.0	4.0	7.6	106.4	62.5			
Police	15.5"	39.4	73.0°	10.3	69.3°	57.0	31.2	5.3	44.5	5.1	8.3	109.0	75.4	38.6	60.2
	17.5"	44.5	72.5°	10.3	69.3°	60.2	31.2	5.3	44.5	5.1	8.3	111.6	77.5	41.2	60.2
	19"	48.3	72.0°	10.3	69.6°	62.2	31.2	5.3	44.5	5.1	8.1	112.7	79.5	42.6	60.3
	21"	5													


Models	Frame size	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover
7.7 FX	50cm	74.6 °	13.0	72.1 °	52.1	26.4	41.0	4.5	6.1	97.4	70.7
	52cm	74.2 °	14.0	72.8 °	53.4	26.4	41.0	4.5	5.7	97.7	72.9
	54cm	73.7 °	15.0	73.0 °	54.3	26.6	41.0	4.5	5.6	98.1	74.2
	56cm	73.3 °	17.0	73.5 °	56.0	26.6	41.0	4.0	5.8	98.3	76.7
	58cm	73.0 °	19.0	73.8 °	57.3	26.6	41.1	4.0	5.6	99.2	78.6
	60cm	72.8 °	21.0	73.9 °	58.6	26.8	41.1	4.0	5.6	100.1	80.4
7.6 FX 7.5 FX 7.4 FX & Disc 7.3 FX 7.2 FX & Disc	15"	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.0	105.7	69.3
	17.5"	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	73.5
	20"	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.8	78.3
	22.5"	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.2	106.4	83.1
	25"	72.0 °	22.0	72.5 °	60.3	28.5	44.5	4.5	6.2	106.5	87.7
	7.6 FX WSD 7.5 FX WSD 7.4 FX WSD 7.3 FX WSD 7.2 FX WSD	13"	75.0 °	11.5	70.0 °	53.0	28.5	44.5	5.0	7.3	105.3
7.1 FX 7.0 FX	15"	75.0 °	13.0	70.5 °	53.3	28.5	44.5	5.0	7.0	105.3	69.7
	17"	74.5 °	15.0	70.5 °	53.9	28.5	44.5	5.0	7.0	105.5	73.2
	19"	74.0 °	16.0	70.5 °	55.3	28.5	44.5	5.0	7.0	106.4	76.7
	15" stagger	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.0	105.6	62.7
	17.5" stagger	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	63.2
	20" stagger	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.6
DS Series	15"	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.1	105.6	69.7
	17.5"	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.6	73.8
	20"	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	78.6
	22.5"	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.3	106.3	83.4
	15" stagger	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.1	105.6	62.7
	17.5" stagger	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.7	63.2
Neko Women's	15.5"	74.0 °	11.0	70.0 °	57.5	28.7	45.5	3.8	8.3	109.1	66.6
	17.5"	74.0 °	12.0	71.0 °	59.0	28.7	45.5	3.8	7.9	109.5	71.4
	19"	73.5 °	13.0	71.0 °	60.5	28.7	45.5	3.8	7.9	110.5	76.2
	21"	73.0 °	14.0	71.5 °	62.0	28.7	45.5	3.8	7.6	111.0	79.7
	22.5"	72.5 °	15.0	72.0 °	63.5	28.7	45.5	3.8	7.3	111.2	83.2
	14"	74.5 °	11.0	70 °	54.5	28.7	45.5	3.8	8.6	106.6	63.0
16"	74.0 °	11.0	70.5 °	56.0	28.7	45.5	3.8	8.3	107.0	67.8	
	18"	73.5 °	12.0	71.0 °	57.5	28.7	45.5	3.8	7.9	107.5	72.5
	14" stagger	74.5 °	13.0	70 °	54.5	28.7	45.5	3.8	8.6	106.8	63.3
	16" stagger	74.0 °	13.0	70.5 °	56.0	28.7	45.5	3.8	8.3	107.1	63.3

All dimensions are in centimeters unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.





Models	Frame size	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Chainstay length	H - Offset	I - Trail	J - Wheelbase	K - Standover
9th District	50cm	74.5°	12.0	72.0°	52.5	28.3	43.7	5.0	6.1	101.5	76.3
	54cm	74.0°	14.0	72.0°	54.2	28.3	43.7	5.0	6.1	102.7	79.3
	56cm	73.5°	16.0	72.5°	56.0	28.3	43.7	4.5	6.3	103.0	81.2
	58cm	73.0°	18.0	72.5°	57.7	28.3	43.7	4.5	6.3	104.2	83.0
	60cm	72.5°	20.0	72.5°	59.4	28.3	43.7	4.5	6.3	105.3	84.6
Steel District	50cm	74.5°	11.8	71.0°	53.7	27.9	43.5	4.5	7.5	102.7	76.1
	54cm	73.5°	13.8	71.5°	56.0	27.9	43.5	4.5	7.0	103.4	79.3
	56cm	73.0°	15.5	72.0°	57.3	28.1	43.5	4.5	6.7	103.8	81.1
	58cm	73.0°	16.8	72.5°	58.0	28.1	43.5	4.5	6.4	104.1	82.9
	61cm	72.5°	18.8	72.5°	59.8	28.1	43.5	4.5	6.4	105.3	84.6
District S	50cm	74.5°	13.0	70.5°	52.8	28.8	43.7	4.5	7.5	103.0	71.0
	54cm	74.0°	15.0	70.5°	54.3	29.1	43.7	4.5	7.6	104.1	73.0
	56cm	73.5°	17.0	71.5°	56.1	29.2	43.7	4.5	7.0	104.4	79.0
	58cm	73.0°	19.0	72.5°	58.0	29.1	43.7	4.5	6.3	104.7	83.0
	60cm	72.0°	21.0	72.5°	60.3	28.8	43.7	4.5	6.3	105.8	84.6
Earl	49cm	74.0°	7.5	72.5°	55.0	28.1	43.0	4.5	6.2	101.7	68.7
	54cm	74.0°	7.5	72.5°	57.0	28.1	43.0	4.5	6.2	103.7	73.0
	57cm	73.0°	10.5	72.5°	59.0	28.1	43.0	4.5	6.2	104.7	77.0
	61cm	73.0°	14.5	72.5°	62.0	28.1	43.0	4.5	6.2	107.7	82.1
Allant Allant 7	15"	74.5°	11.5	70.5°	54.4	28.5	44.5	5.0	6.3	105.6	69.7
	17.5"	74.0°	13.0	70.5°	54.8	28.5	44.5	5.0	6.3	105.6	73.8
	20"	73.5°	16.0	71.5°	56.8	28.5	44.5	4.5	6.3	105.7	78.6
	22.5"	73.0°	19.0	72.5°	59.0	28.5	44.5	4.5	6.3	106.3	83.4
Allant WSD Allant 7 WSD	15"	74.5°	13.0	70.5°	54.3	28.5	44.5	5.0	7.1	105.6	62.7
	17.5"	74.0°	15.0	70.5°	54.8	28.5	44.5	5.0	7.1	105.7	63.2
	20"	73.5°	17.0	71.5°	56.8	28.5	44.5	4.5	7.0	105.7	63.6
	22"	73.0°	19.0	72.5°	59.0	28.5	44.5	4.5	7.0	107.7	63.1
Transport	17.5"	73°	18.6	71°	55.5	29	62.5	4	7.0	123.2	62.2
	20"	73°	21.6	71°	60	29	62.5	4	7.0	127.8	63.1
Shift	14.5"	65.5°	13.7	69.0°	59.4	28.2	49.5	5.0	7.4	108.0	67.0
	16.5"	65.5°	17.2	69.0°	61.1	28.2	49.5	5.0	7.4	109.5	70.6
	18.5"	65.5°	17.2	69.0°	62.0	28.2	49.5	5.0	7.4	110.3	72.7
	21"	65.5°	22.2	69.0°	64.9	28.2	49.5	5.0	7.4	113.0	76.8
	13.5"	65.5°	16.2	69.0°	59.1	28.2	49.5	5.0	7.4	107.5	50.3
Shift WSD	16.5"	65.5°	17.2	69.0°	61.1	28.2	49.5	5.0	7.4	109.5	50.3
	19"	65.5°	19.7	69.0°	63.3	28.2	49.5	5.0	7.4	111.5	50.3
	21.5"	65.5°	22.2	69.0°	66.3	28.2	49.5	5.0	7.4	113.0	50.3
Verve	15"	73.0°	10.0	70.5°	57.2	28.5	46.5	5.1	7.0	109.0	71.5
	17.5"	72.5°	11.5	70.5°	57.8	28.5	46.5	5.1	7.0	109.2	75.3
	20"	72.0°	12.5	70.5°	59.4	28.5	46.5	5.1	7.0	110.3	78.9
	22.5"	71.5°	15.5	71.0°	61.3	28.5	46.5	5.1	6.6	111.1	83.5
	25"	71.5°	20.5	71.0°	62.0	28.5	46.5	5.1	6.6	111.8	89.0
Verve WSD	13"	73.0°	17.0	70.5°	56.0	28.5	46.5	5.1	6.9	108.3	44.8
	16"	72.5°	18.0	70.5°	57.5	28.5	46.5	5.1	7.0	109.2	44.8
	19"	72.0°	18.0	70.5°	60.0	28.5	46.5	5.1	7.0	111.0	44.8
Pure & Pure S Pure & Pure S Lowstep	16"	68.0°	23.5	69.0°	68.5	28.5	60.0	5.0	7.4	117.5	72.6
	14"	68.0°	23.5	69.0°	68.5	28.5	60.0	5.0	7.4	117.5	51.3
T 900	18.5" front	72.5°	19.5	73.0°	57.7	28.7	43.5	5.5	4.4	177.1	76.1
	14.5" rear	72.5°			22.7	28.6					55.9
T80+	50 cm	73.5°	16.0	70.5°	57.7	28.4	45.5	4.5	7.5	109.0	72.4
	55 cm	73.0°	16.0	71.0°	59.4	28.4	45.5	4.5	7.2	110.0	76.9
	60 cm	73.0°	18.0	71.0°	60.8	28.4	45.5	4.5	7.2	111.0	81.7
	40 cm Lowstep	73.0°	16.0	70.5°	57.0	27.5	45.0	4.5	7.6	107.0	41.5
	45 cm Lowstep	74.5°	16.0	70.5°	58.0	27.5	46.5	4.5	7.6	111.0	41.5
50 cm Lowstep	73.5°	18.0	70.5°	60.0	27.5	46.5	4.5	7.6	111.8	41.5	

All dimensions are in centimeters unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.